



SPOT OR

Instalación

Enrasado en falso techo.

Diseño

Lámpara LED redonda, con disipador de aluminio y muelles de fijación para orificio en falso techo. Aro tipo basculante en color BLANCO O NEGRO. Luminaria autónoma. Permanente, no permanente y ON-OFF. LED SMD indicador de carga de batería. AUTOTEST.

Parte óptica

LED COB. Orientable.

Installation

Ceiling recessed mounting.

Design

Round LED lamp, with aluminium heat sink and fixing springs for hole in false ceiling. Tilting type ring in WHITE OR BLACK colour. Self contained. Maintained, non maintained and ON-OFF. SMD LED indicates the battery charging. SELF-TEST.



Optical part

COB LED. Adjustable.

Iluminación de emergencia
Emergency lighting

ESPECIFICACIONES SPECIFICATIONS

	230V ~ 50/60Hz		Clase II Class II
	IP20		Marcado CE CE marked
	4000K		24 horas 24 hours
	Permanente/No permanente/Autotest Maintained/Non maintained/Self-test		Ni-Cd/Ni-Mh
	Garantía 3 años 3 year warranty		Smart

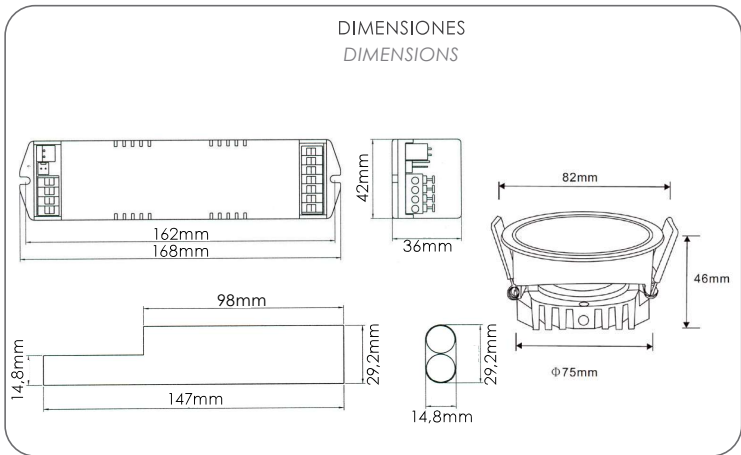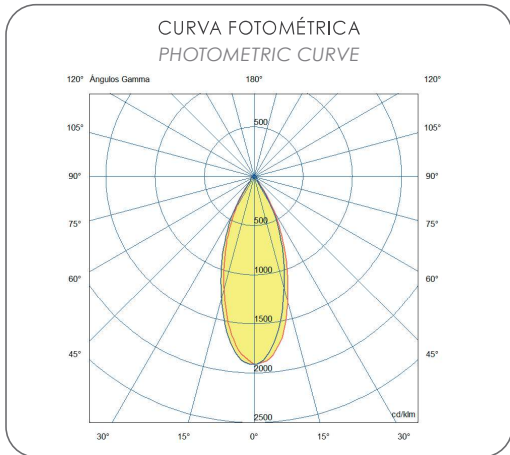

Código Code	Modelo Model							
38005W	SPOT OR 300-1W AT	☐	P/NP/AT	20	0.45	1	300	6V 0.8Ah
38005B	SPOT OR 300-1B AT	☒	P/NP/AT	20	0.45	1	300	6V 0.8Ah
380053W	SPOT OR 300-3W AT	☐	P/NP/AT	20	0.69	3	300	6V 1.5Ah
380053B	SPOT OR 300-3B AT	☒	P/NP/AT	20	0.69	3	300	6V 1.5Ah
38005WC230	SPOT OR 300-W CENTRAL 230V	☐	-	20	0.35	-	300	-
38005BC230	SPOT OR 300-B CENTRAL 230V	☒	-	20	0.35	-	300	-
38005WSMT	SPOT OR 300-W SMART	☐	P/NP/AT	20	0.45	1 - 3	100 - 300	6V 0.8Ah
38005BSMT	SPOT OR 300-B SMART	☒	P/NP/AT	20	0.45	1 - 3	100 - 300	6V 0.8Ah

*Fabricado según la norma UNE-EN 60598-2-22/Manufactured according to standard UNE-EN 60598-2-22