



淇轩电器有限公司

电话: +86-760-22120818
传真: +86-760-22137118
邮箱: manager@kayhin.com
网站: www.kayhin.com
地址: 广东省中山市小榄镇泰弘南路2号汶权科技园F栋

Kayhin Electric Appliance Co., Ltd.

Tel: +86-760-22120818
Fax: +86-760-22137118
E-mail: manager@kayhin.com
Website: www.kayhin.com
Address: Wenquan industry park, No.2 Mincheng xi Road,
baofeng, Xiaolan Town, Zhongshan City, Guangdong, China.





COMPANY PROFILE

Kayhin Electric Appliance co., Ltd was established in 2000, and located in Zhongshan City of China. We are a LED professional manufacturer and exporter, our main concern is the design, quality and development of the products, all of our items are complied with international quality standard, and our brand is known more and more by customers from all of the world.

We have our own professional engineering department, they are responsible for the products development and quality testing. Therefore our products quality and safety are guaranteed, and you can use low price to get much more better quality products, choose to work with us, will bring you more opportunity to expand your business, we are THE ONE you are looking for !!

For all of our products, we could make specific size, types and colors according to your needs, you can send us your details and we will prepare the quotation and then send to you for reference.



S061

Adjustable floodlight suitable for wall or ceiling application, it can be applied direct or indirect use. It has a low visual impact, presented in many versions, to ensure an exceptional flexibility of use.



■ *suspending*





Lamp body color available

■ Black

□ White

PHILIPS
5 Years
Warranty

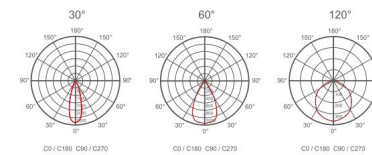

IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S061-30W-B-SMD-DH	30W	200x200x122mm	36pcs	Philips3030	3300-3900lm	AC100-265V	60°/120°	2700-6500K	>80
KH-FL-S061-50W-B-SMD-DH	50W	245x245x122mm	56pcs	Philips3030	5500-6500lm	AC100-265V	30°/60°/120°	2700-6500K	>80
KH-FL-S061-100W-B-SMD-DH	100W	266x266x134mm	108 pcs	Philips3030	11000-13000lm	AC100-265V	30°/60°/120°	2700-6500K	>80
KH-FL-S061-30W-B-SMD-LH	30W	200x200x42mm	36pcs	Sanan2835	2700-3000lm	AC170-265V	60°/120°	2700-6500K	>80
KH-FL-S061-50W-B-SMD-LH	50W	245x245x42mm	56pcs	Sanan2835	4500-5000lm	AC170-265V	30°/60°/120°	2700-6500K	>80
KH-FL-S061-100W-B-SMD-LH	100W	266x266x52mm	108 pcs	Sanan2835	9000-10000lm	AC170-265V	30°/60°/120°	2700-6500K	>80





■ *recessed*




Lamp body color available

■ Black

□ White

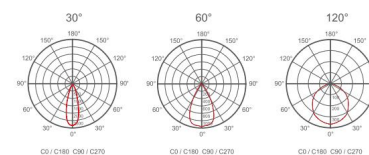

Model	Power	Size	Cut out Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S061-30W-B-SMD-DR	30W	200x200x84mm	162x162mm	36pcs	Philips3030	3300-3900lm	AC100-265V	60°/120°	2700-6500K	>80
KH-FL-S061-50W-B-SMD-DR	50W	245x245x84mm	216x216mm	56pcs	Philips3030	5500-6500lm	AC100-265V	30°/60°/120°	2700-6500K	>80
KH-FL-S061-100W-B-SMD-DR	100W	266x266x95mm	226x226mm	108 pcs	Philips3030	11000-13000lm	AC100-265V	30°/60°/120°	2700-6500K	>80
KH-FL-S061-30W-B-SMD-LR	30W	200x200x32mm	162x162mm	36pcs	Sanan2835	2700-3000lm	AC170-265V	60°/120°	2700-6500K	>80
KH-FL-S061-50W-B-SMD-LR	50W	245x245x32mm	216x216mm	56pcs	Sanan2835	4500-5000lm	AC170-265V	30°/60°/120°	2700-6500K	>80
KH-FL-S061-100W-B-SMD-LR	100W	266x266x42mm	226x226mm	108 pcs	Sanan2835	9000-10000lm	AC170-265V	30°/60°/120°	2700-6500K	>80

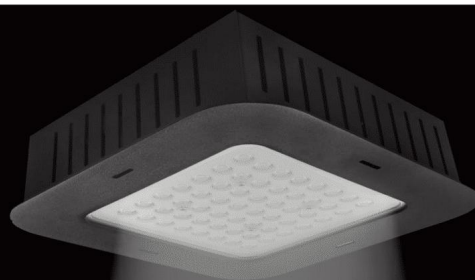

■ *surface*

006




MW
PHILIPS
5 Years
Warranty




Lamp body color available

■ Black

□ White



CG / C180 C90 / C270



CG / C180 C90 / C270





CG / C180 C90 / C270



IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S061-30W-B-SMD-DS	30W	200x200x84mm	36pcs	Philips3030	3300-3900lm	AC100-265V	60°/120°	2700-6500K	>80
KH-FL-S061-50W-B-SMD-DS	50W	245x245x84mm	56pcs	Philips3030	5500-6500lm	AC100-265V	30°/60°/120°	2700-6500K	>80
KH-FL-S061-100W-B-SMD-DS	100W	266x266x95mm	108 pcs	Philips3030	11000-13000lm	AC100-265V	30°/60°/120°	2700-6500K	>80
KH-FL-S061-30W-B-SMD-LS	30W	200x200x36mm	36pcs	Sanan2835	2700-3000lm	AC170-265V	60°/120°	2700-6500K	>80
KH-FL-S061-50W-B-SMD-LS	50W	245x245x36mm	56pcs	Sanan2835	4500-5000lm	AC170-265V	30°/60°/120°	2700-6500K	>80
KH-FL-S061-100W-B-SMD-LS	100W	266x266x46mm	108 pcs	Sanan2835	9000-10000lm	AC170-265V	30°/60°/120°	2700-6500K	>80

007





IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-L061-30W-B-SMD-SD	30W	300x196.5x68mm	36pcs	Philips3030	3900lm	AC100-277V	30°/60°/120°	2800-6500K	>75
KH-FL-L061-50W-B-SMD-SD	50W	346x248x68mm	56pcs	Philips3030	6500lm	AC100-277V	30°/60°/120°	2800-6500K	>75
KH-FL-L061-100W-B-SMD-SD	100W	384x270x68mm	108 pcs	Philips3030	13000lm	AC100-277V	30°/60°/120°	2800-6500K	>75



MW
MEAN WELL
PHILIPS
5 Years
Warranty




IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S061-30W-B-SMD-LINEAR	30W	194x170x32mm	36pcs	Sanan2835	2700-3000lm	AC170-265V	60°/120°	2700-6500K	>80
KH-FL-S061-30W-B-SMD-DRIVER	30W	194x170x76mm	36pcs	Philips3030	3300-3900lm	AC100-265V	60°/120°	2700-6500K	>80



Can be combined as following

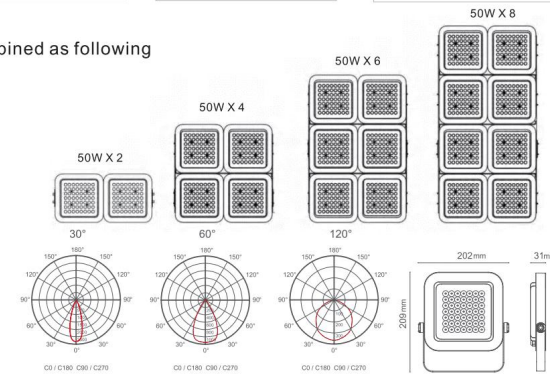





IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S061-50W-B-SMD-LINEAR	50W	209*202*31mm	56 pcs	Sanan2835	4500-5000lm	AC170-265V	30°/60°/120°	2700-6500K	>80
KH-FL-S061-50W*2-B-SMD-LINEAR	100W	418*202*31mm	112 pcs	Sanan2835	9000-10000lm	AC170-265V	30°/60°/120°	2700-6500K	>80
KH-FL-S061-50W*4-B-SMD-LINEAR	200W	418*404*31mm	224 pcs	Sanan2835	18000-20000lm	AC170-265V	30°/60°/120°	2700-6500K	>80
KH-FL-S061-50W*6-B-SMD-LINEAR	300W	418*608*31mm	336 pcs	Sanan2835	27000-30000lm	AC170-265V	30°/60°/120°	2700-6500K	>80
KH-FL-S061-50W*8-B-SMD-LINEAR	400W	819*404*31mm	448 pcs	Sanan2835	36000-40000lm	AC170-265V	30°/60°/120°	2700-6500K	>80

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S061-50W-B-SMD-DRIVER	50W	209*202*31mm	56 pcs	Philips3030	5500-6500lm	AC100-265V	30°/60°/120°	2700-6500K	>80
KH-FL-S061-50W*2-B-SMD-DRIVER	100W	418*202*31mm	112 pcs	Philips3030	11000-13000lm	AC100-265V	30°/60°/120°	2700-6500K	>80
KH-FL-S061-50W*4-B-SMD-DRIVER	200W	418*404*31mm	224 pcs	Philips3030	22000-26000lm	AC100-265V	30°/60°/120°	2700-6500K	>80
KH-FL-S061-50W*6-B-SMD-DRIVER	300W	418*608*31mm	336 pcs	Philips3030	33000-39000lm	AC100-265V	30°/60°/120°	2700-6500K	>80
KH-FL-S061-50W*8-B-SMD-DRIVER	400W	819*404*31mm	448 pcs	Philips3030	44000-52000lm	AC100-265V	30°/60°/120°	2700-6500K	>80



MW
MEAN WELL
PHILIPS
5 Years
Warranty






IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S061-100W-B-SMD-LINEAR	100W	220*270*34mm	108pcs	Sanan2835	9000-10000lm	AC170-265V	30°/60°/120°	2700-6500K	>80
KH-FL-S061-100W-B-SMD-DRIVER	100W	220*270*34mm	108pcs	Philips3030	11000-13000lm	AC100-265V	30°/60°/120°	2700-6500K	>80




MW
MEAN WELL
PHILIPS
5 Years
Warranty

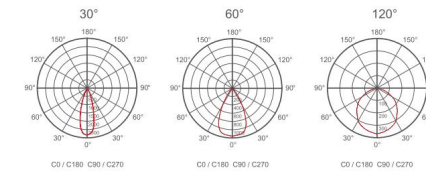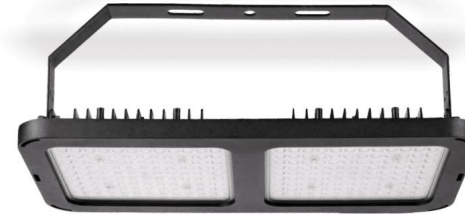


IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S061-200W-B-SMD-LINEAR	200W	455*235*56mm	216pcs	Sanan2835	18000-20000lm	AC170-265V	30°/60°/120°	2700-6500K	>80
KH-FL-S061-200W-B-SMD-DRIVER	200W	455*235*56mm	216pcs	Philips3030	22000-26000lm	AC100-265V	30°/60°/120°	2700-6500K	>80

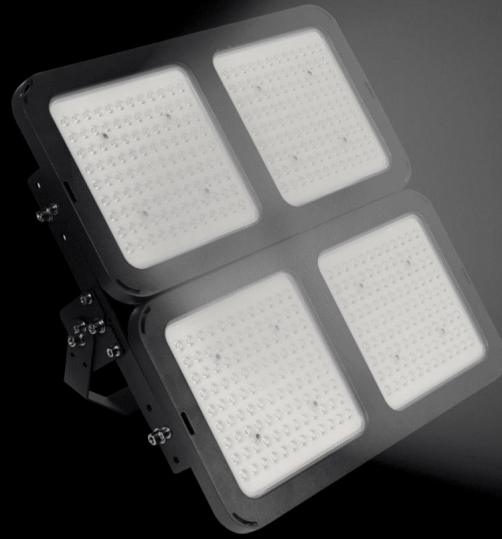

combination 200W X 2

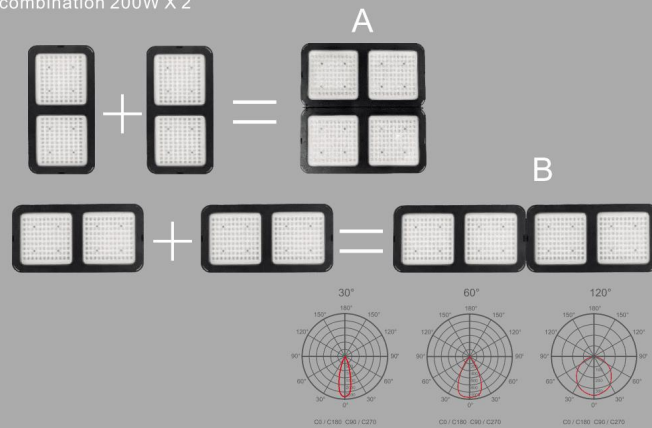


IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S061-200W*2-B-SMD-LINEAR-A	400W	455*416*56mm	432pcs	Sanan2835	36000-40000lm	AC170-265V	30°/60°/120°	2700-6500K	>80
KH-FL-S061-200W*2-B-SMD-LINEAR-B	400W	915*237*56mm	432pcs	Sanan2835	36000-40000lm	AC170-265V	30°/60°/120°	2700-6500K	>80
KH-FL-S061-200W*2-B-SMD-DRIVER-A	400W	455*416*56mm	432pcs	Philips3030	44000-52000lm	AC100-265V	30°/60°/120°	2700-6500K	>80
KH-FL-S061-200W*2-B-SMD-DRIVER-B	400W	915*237*56mm	432pcs	Philips3030	44000-52000lm	AC100-265V	30°/60°/120°	2700-6500K	>80



combination 200W X 3


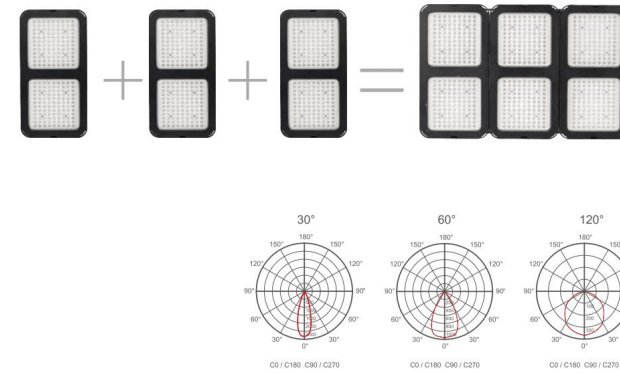


IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S061-200W*3-B-SMD-LINEAR	600W	715*455*56mm	648pcs	Sanan2835	54000-60000lm	AC170-265V	30°/60°/120°	2700-6500K	>80
KH-FL-S061-200W*3-B-SMD-DRIVER	600W	715*455*56mm	648pcs	Philips3030	66000-78000lm	AC100-265V	30°/60°/120°	2700-6500K	>80




combination 200W X 4

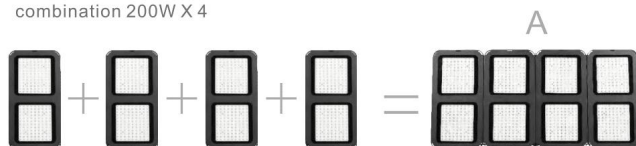

B

MW
MEAN WELL
PHILIPS
5 Years
Warranty

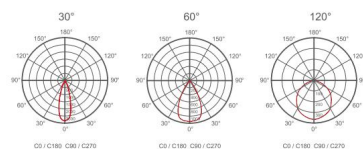



IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S061-200W*4-B-SMD-LINEAR-A	800W	955*455*56mm	864pcs	Saran2835	72000-80000lm	AC170-265V	30°/60°/120°	2700-6500K	>80
KH-FL-S061-200W*4-B-SMD-LINEAR-B	800W	455*915*56mm	864pcs	Saran2835	72000-80000lm	AC170-265V	30°/60°/120°	2700-6500K	>80
KH-FL-S061-200W*4-B-SMD-DRIVER-A	800W	955*455*56mm	864pcs	Philips3030	88000-104000lm	AC100-265V	30°/60°/120°	2700-6500K	>80
KH-FL-S061-200W*4-B-SMD-DRIVER-B	800W	455*915*56mm	864pcs	Philips3030	88000-104000lm	AC100-265V	30°/60°/120°	2700-6500K	>80





combination 300W X 3

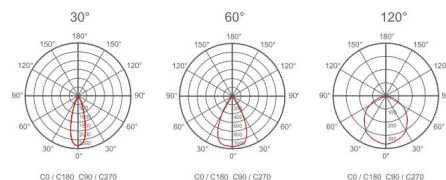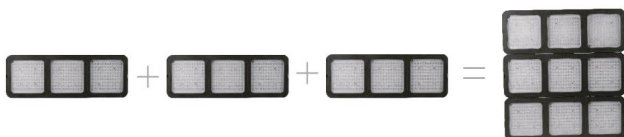


IP65 CE RoHS LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S061-300W*3-B-SMD-LINEAR	900W	712*670*56mm	972pcs	Sanan2835	81000-90000lm	AC170-265V	30°/60°/120°	2700-6500K	>80
KH-FL-S061-300W*3-B-SMD-DRIVER	900W	712*670*56mm	972pcs	Philips3030	99000-117000lm	AC100-265V	30°/60°/120°	2700-6500K	>80

S068


Area lighting series are suitable for wall or street, with the special design, the lighting ensures the flexibility of use: work as floodlight with bracket, as street light with pole and connector.



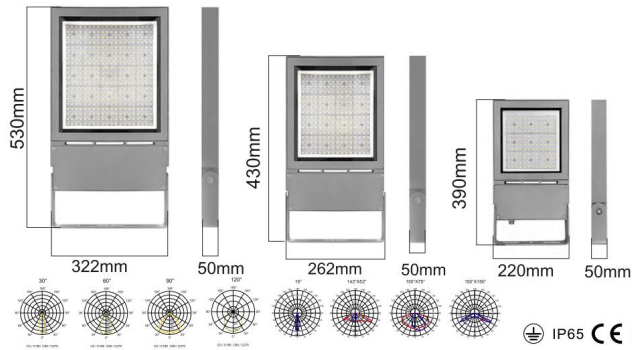

Model	Power	Size	Lens	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S068-50W-G-SMD	50W	390*220*50mm	8in1	72pcs	Philips3030	130lm/W	AC100-265V	15°/30°/60°/90°/120°/150°/90X90°/142X52°/150X150°/150X75°	2700-6500K	>80
KH-FL-S068-80W-G-SMD-A	80W	390*220*50mm	12in1	108pcs	Philips3030	130lm/W	AC100-265V	15°/30°/60°/90°/120°/150°/90X90°/142X52°/150X150°/150X75°	2700-6500K	>80
KH-FL-S068-80W-G-SMD-B	80W	390*220*50mm	16in1	144pcs	Philips3030	150lm/W	AC100-265V	15°/30°/60°/90°/120°/150°/90X90°/142X52°/150X150°/150X75°	2700-6500K	>80
KH-FL-S068-100W-G-SMD	100W	430*262*50mm	8in1	128pcs	Philips3030	130lm/W	AC100-265V	15°/30°/60°/90°/120°/150°/90X90°/142X52°/150X150°/150X75°	2700-6500K	>80
KH-FL-S068-150W-G-SMD-A	150W	430*262*50mm	12in1	192pcs	Philips3030	130lm/W	AC100-265V	15°/30°/60°/90°/120°/150°/90X90°/142X52°/150X150°/150X75°	2700-6500K	>80
KH-FL-S068-150W-G-SMD-B	150W	430*262*50mm	16in1	256pcs	Philips3030	150lm/W	AC100-265V	15°/30°/60°/90°/120°/150°/90X90°/142X52°/150X150°/150X75°	2700-6500K	>80
KH-FL-S068-200W-G-SMD	200W	530*322*50mm	8in1	200pcs	Philips3030	130lm/W	AC100-265V	15°/30°/60°/90°/120°/150°/90X90°/142X52°/150X150°/150X75°	2700-6500K	>80
KH-FL-S068-250W-G-SMD-A	250W	530*322*50mm	12in1	300pcs	Philips3030	130lm/W	AC100-265V	15°/30°/60°/90°/120°/150°/90X90°/142X52°/150X150°/150X75°	2700-6500K	>80
KH-FL-S068-250W-G-SMD-B	250W	530*322*50mm	16in1	400pcs	Philips3030	150lm/W	AC100-265V	15°/30°/60°/90°/120°/150°/90X90°/142X52°/150X150°/150X75°	2700-6500K	>80

IP65 CE IK08 LED

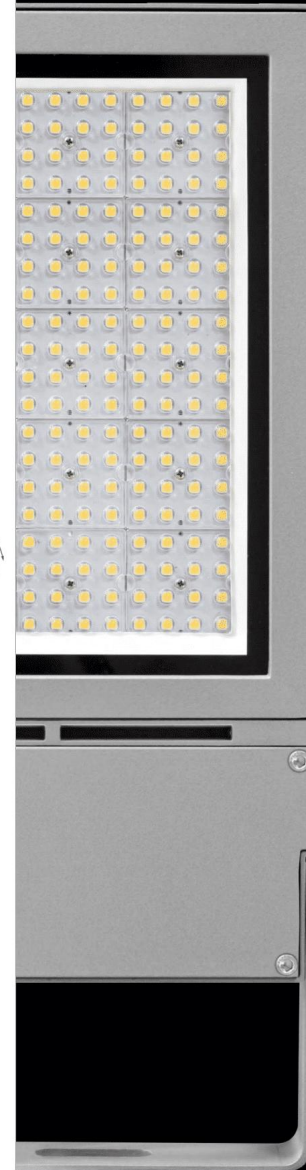


068 Flood light are produced in 3 different sizes and each with different power. Luminaires are equipped with optical elements that can meet a wide range of lighting needs. It can provide sufficient power and different color temperature in area lighting, facade lighting and many usage areas. Luminaires are aluminum body. It has steel mounting feet.






STREET LIGHT VERSION

50W/80W/100W/150W/200W/250W

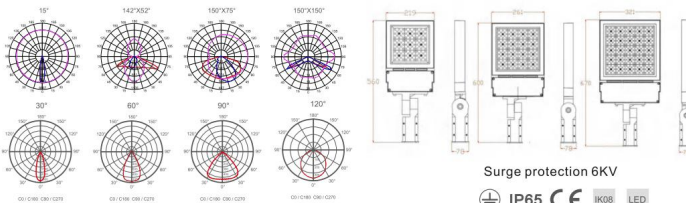





Model	Power	Size	Lens	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-SL-5008-50W-G-SMD	50W	560*219*50mm	8mm	72pcs	Philips3030	130lm/W	AC100-265V	15°/30°/60°/90°/120°/150°/180°/90°/142°/32°/150°/150°/150°/75°	2700-6500K	>80
KH-SL-5008-80W-G-SMD-A	80W	560*219*50mm	12mm	108pcs	Philips3030	130lm/W	AC100-265V	15°/30°/60°/90°/120°/150°/180°/90°/142°/32°/150°/150°/150°/75°	2700-6500K	>80
KH-SL-5008-80W-G-SMD-B	80W	560*219*50mm	16mm	144pcs	Philips3030	150lm/W	AC100-265V	15°/30°/60°/90°/120°/150°/180°/90°/142°/32°/150°/150°/150°/75°	2700-6500K	>80
KH-SL-5008-100W-G-SMD	100W	600*261*50mm	8mm	128pcs	Philips3030	130lm/W	AC100-265V	15°/30°/60°/90°/120°/150°/180°/90°/142°/32°/150°/150°/150°/75°	2700-6500K	>80
KH-SL-5008-150W-G-SMD-A	150W	600*261*50mm	12mm	192pcs	Philips3030	130lm/W	AC100-265V	15°/30°/60°/90°/120°/150°/180°/90°/142°/32°/150°/150°/150°/75°	2700-6500K	>80
KH-SL-5008-150W-G-SMD-B	150W	600*261*50mm	16mm	256pcs	Philips3030	150lm/W	AC100-265V	15°/30°/60°/90°/120°/150°/180°/90°/142°/32°/150°/150°/150°/75°	2700-6500K	>80
KH-SL-5008-200W-G-SMD	200W	670*321*50mm	8mm	200pcs	Philips3030	130lm/W	AC100-265V	15°/30°/60°/90°/120°/150°/180°/90°/142°/32°/150°/150°/150°/75°	2700-6500K	>80
KH-SL-5008-250W-G-SMD-A	250W	670*321*50mm	12mm	300pcs	Philips3030	130lm/W	AC100-265V	15°/30°/60°/90°/120°/150°/180°/90°/142°/32°/150°/150°/150°/75°	2700-6500K	>80
KH-SL-5008-250W-G-SMD-B	250W	670*321*50mm	16mm	400pcs	Philips3030	150lm/W	AC100-265V	15°/30°/60°/90°/120°/150°/180°/90°/142°/32°/150°/150°/150°/75°	2700-6500K	>80



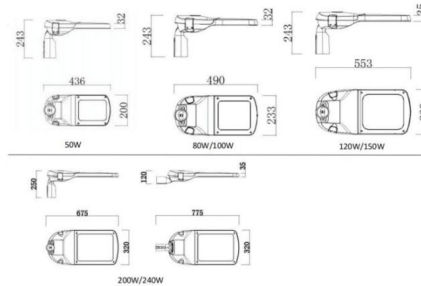

Surge protection 6KV
IP65 CE IK08 LED



Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-SL-S062-50W-B-SMD	50W	436*243*120MM	72pcs	SMD 3030	6,500lm	AC100-265V	T2 T3 T4 T5	2700-6500K	>70
KH-SL-S062-80W-B-SMD	80W	583*244*120MM	108PCS	SMD 3030	10,400lm	AC100-265V	T2 T3 T4 T5	2700-6500K	>70
KH-SL-S062-100W-B-SMD	100W	583*244*120MM	144PCS	SMD 3030	13,000lm	AC100-265V	T2 T3 T4 T5	2700-6500K	>70
KH-SL-S062-120W-B-SMD	120W	673*260*120MM	144PCS	SMD 3030	15,600lm	AC100-265V	T2 T3 T4 T5	2700-6500K	>70
KH-SL-S062-150W-B-SMD	150W	673*260*122MM	192PCS	SMD 3030	19,500lm	AC100-265V	T2 T3 T4 T5	2700-6500K	>70
KH-SL-S062-200W-B-SMD	200W	775*320*120MM	240PCS	SMD 3030	26,000lm	AC100-265V	T2 T3 T4 T5	2700-6500K	>70
KH-SL-S062-240W-B-SMD	240W	775*320*120MM	320PCS	SMD 3030	31,200lm	AC100-265V	T2 T3 T4 T5	2700-6500K	>70

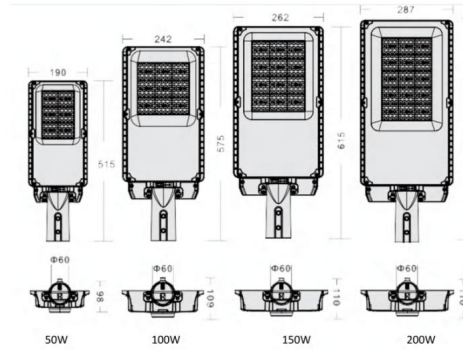

Surge protection 6KV

IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-SL-S093-50W-G-SMD	50W	515*190*98mm	96pcs	SMD 3030	6500lm	AC100-265V	T2M,T3M,T4M,60,90,70°140	2800-6500K	≥70
KH-SL-S093-100W-G-SMD	100W	575*242*109mm	144pcs	SMD 3030	13000lm	AC100-265V	T2M,T3M,T4M,60,90,70°140	2800-6500K	≥70
KH-SL-S093150W-G-SMD	150W	615*262*110mm	192pcs	SMD 3030	19500lm	AC100-265V	T2M,T3M,T4M,60,90,70°140	2800-6500K	≥70
KH-SL-S093-200W-G-SMD	200W	685*287*110mm	240pcs	SMD 3030	26000lm	AC100-265V	T2M,T3M,T4M,60,90,70°140	2800-6500K	≥70


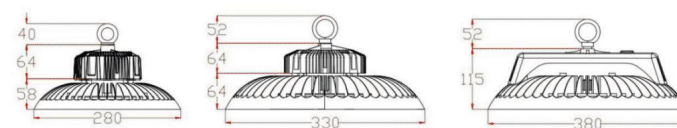


Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-UFO013-100W-B-SMD	100W	280*250mm	140pcs	Philips Lumileds3030	15000lm	AC100-265V	60°/90°/120°	2700-6500K	>80
KH-UFO013-150W-B-SMD	150W	320*250mm	210pcs	Philips Lumileds3030	22500lm	AC100-265V	60°/90°/120°	2700-6500K	>80
KH-UFO013-200W-B-SMD	200W	380*250mm	294pcs	Philips Lumileds3030	30000lm	AC100-265V	60°/90°/120°	2700-6500K	>80



UFO018

Ultra slim lamp body
Water proof IP 65
Simple but elegant design
Driver or linear version for option
High lumen output at 150-160 per watt
Surge protection:LN-PG:10KV L-N:5KV
5 years warranty



IP65 CE IK08 LED


Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	Surge protection	CRI
KH-UFO018-100W-B-SMD-LINEAR	100W	330*28mm	116 pcs	2835	13000lm	AC170-265V	60°/90°/120°	2700-6500K	LN-PG-8KV L-N-4KV	>80
KH-UFO018-150W-B-SMD-LINEAR	150W	330*28mm	174 pcs	2835	19500lm	AC170-265V	60°/90°/120°	2700-6500K	LN-PG-8KV L-N-4KV	>80
KH-UFO018-200W-B-SMD-LINEAR	200W	380*28mm	232 pcs	2835	26000lm	AC170-265V	60°/90°/120°	2700-6500K	LN-PG-8KV L-N-4KV	>80
KH-UFO018-100W-B-SMD-DRIVER	100W	330*160mm	168 pcs	Philips lumileds 3030	15000lm	AC100-265V	60°/90°/120°	2700-6500K	LN-PG-8KV L-N-4KV	>80
KH-UFO018-150W-B-SMD-DRIVER	150W	330*160mm	252 pcs	Philips lumileds 3030	22500lm	AC100-265V	60°/90°/120°	2700-6500K	LN-PG-8KV L-N-4KV	>80
KH-UFO018-200W-B-SMD-DRIVER	200W	380*160mm	336 pcs	Philips lumileds 3030	30000lm	AC100-265V	60°/90°/120°	2700-6500K	LN-PG-8KV L-N-4KV	>80




+Reflector



Radar Sensor+Remote control




DIALux




IP65 CE IK08 LED


Model	Power	Size	Chip qty	LED chip	Lumen	Voltage	Beam Angle	CCT	CRI
KH-UFO016-100W-DOB	100W	Ø250*140mm	144	SMD 2835	10000Lm	AC165-265V	90°	2800-6500K	>70
KH-UFO016-150W-DOB	150W	Ø300*140mm	216	SMD 2835	15000Lm	AC165-265V	90°	2800-6500K	>70
KH-UFO016-200W-DOB	200W	Ø350*140mm	288	SMD 2835	20000Lm	AC165-265V	90°	2800-6500K	>70
KH-UFO016-100W-B-SMD	100W	Ø250*140mm	168	SMD 2835	15,000Lm	AC85-265V	120°90°60°	2800-6500K	>70
KH-UFO016-150W-B-SMD	150W	Ø300*140mm	240	SMD 2835	25,500Lm	AC85-265V	120°90°60°	2800-6500K	>70
KH-UFO016-200W-B-SMD	200W	Ø350*140mm	360	SMD 2835	30,000Lm	AC85-265V	120°90°60°	2800-6500K	>70
KH-UFO016-240W-B-SMD	240W	Ø400*140mm	480	SMD 2835	36,000Lm	AC85-265V	120°90°60°	2800-6500K	>70



+Reflector




DIALux



IP65 CE IK08 LED

Model	Power	Size	Chip qty	LED chip	Lumen	Voltage	Beam Angle	CCT	CRI
KH-UFO017-100W-B-SMD	100W	Ø253x111mm	160	SMD 2835	15,000Lm	AC85-265V	120°90°60°	2800-6500K	>70
KH-UFO017-150W-B-SMD	150W	Ø308x117mm	240	SMD 2835	25,500Lm	AC85-265V	120°90°60°	2800-6500K	>70
KH-UFO017-200W-B-SMD	200W	Ø354x122mm	320	SMD 2835	30,000Lm	AC85-265V	120°90°60°	2800-6500K	>70




IP65 CE IK08 LED

Model	Power	Size	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-UFO011-100W-B-SMD	100W	Ø280*182mm	SMD 3030	11000-13000Lm	AC100-265V	120°/60°	2800-6500K	>70
KH-UFO011-150W-B-SMD	150W	Ø330*210mm	SMD 3030	16500-19500Lm	AC100-265V	120°/60°	2800-6500K	>70
KH-UFO011-200W-B-SMD	200W	Ø380*230mm	SMD 3030	22000-26000Lm	AC100-265V	120°/60°	2800-6500K	>70

LED GARDEN LIGHTS






Surge protection 6KV

IP65 CE IK08 LED



Model	Power	Size	Chip qty	Chip Size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-GL004-80W-B-SMD	80W	400x400x600mm	140	SMD 3030	10400lm	AC100-265V	120°	2800-6500K	≥80

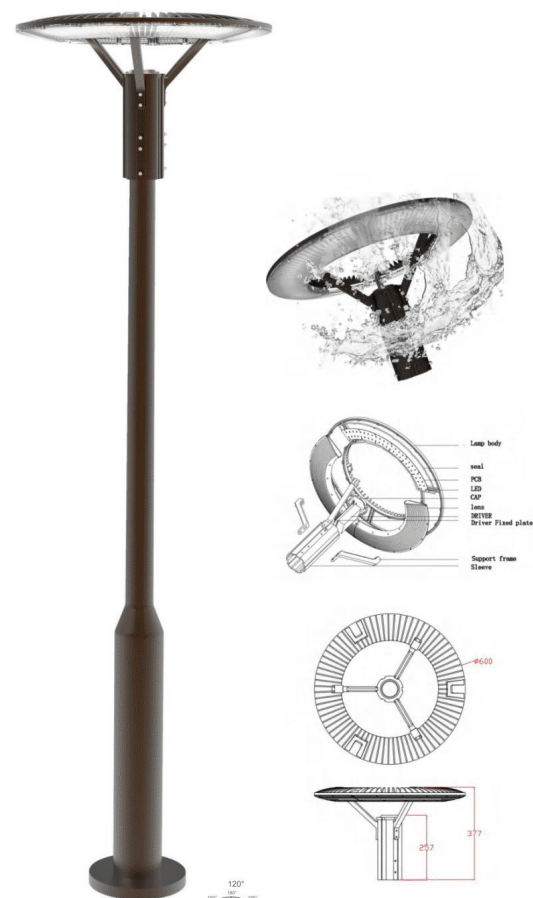

Surge protection 6KV


IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip Size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-GL003-100W-B-SMD	100W	Ø600x370mm	168	SMD 3030	13000lm	AC100-265V	120°	2800-6500K	≥80




Surge protection 6KV
IP65 CE RoHS LED

Model	Power	Size	Chip qty	Chip Size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-GL005-60W-B-SMD-A	60W	515x460mm	72	SMD 3030	7800lm	AC100-265V	120°	2800-6500K	≥80



Surge protection 6KV
IP65 CE RoHS LED


Model	Power	Size	Chip qty	Chip Size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-GL005-60W-B-SMD-B	60W	515x460mm	72	SMD 3030	7800lm	AC100-265V	120°	2800-6500K	≥80

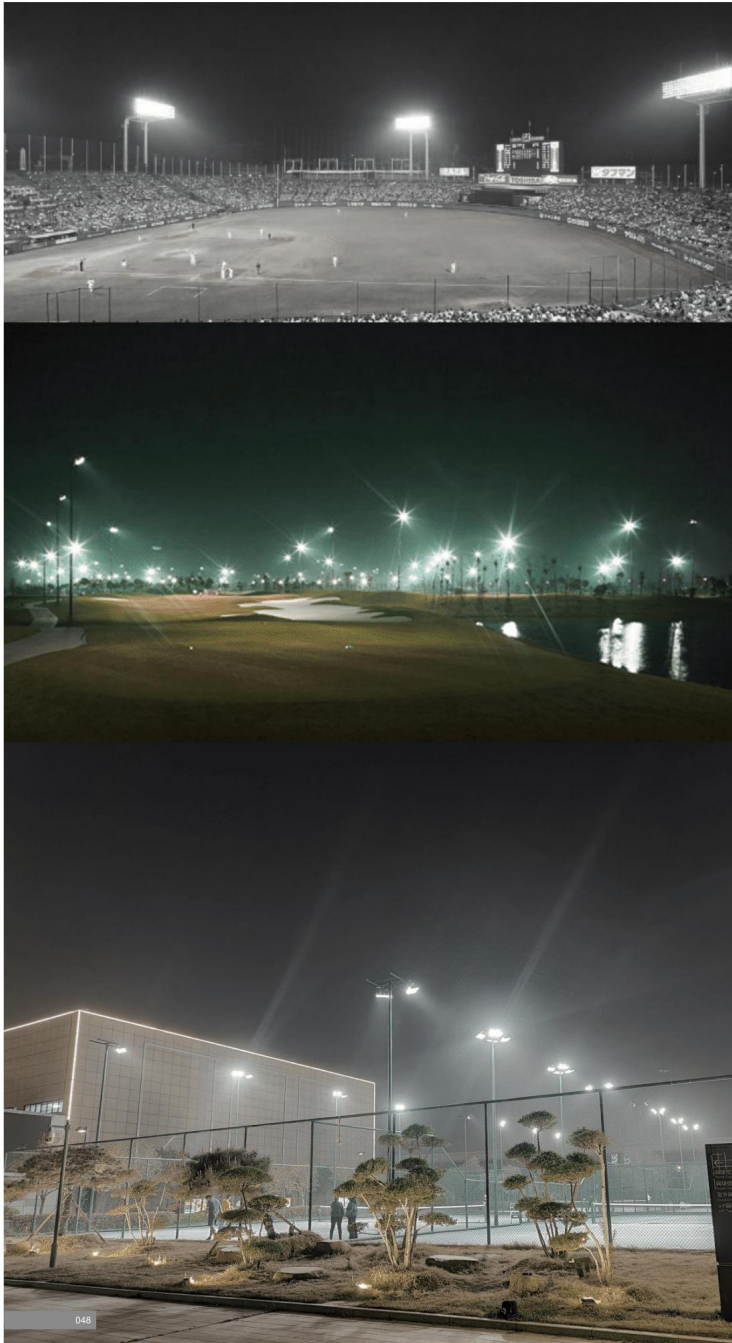




KAYHIN 科益
www.kayhin.com

IP
65

MW
MEAN WELL


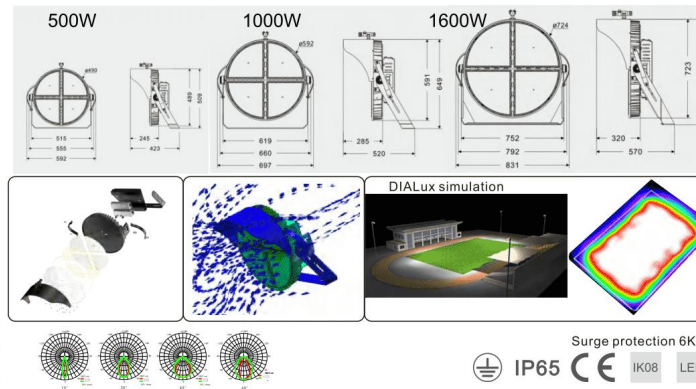


Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-R063-500W-B-SMD-D	500W	592*509*423mm	960	PHILIPS LUMILEDS	75,000lm	AC85-265V	15°/30°/45°/60°	2800-6500K	>80
KH-FL-R063-1000W-B-SMD-D	1000W	697*649*520mm	1632	PHILIPS LUMILEDS	150,000lm	AC85-265V	15°/30°/45°/60°	2800-6500K	>80
KH-FL-R063-1600W-B-SMD-D	1600W	831*772*570mm	2456	PHILIPS LUMILEDS	240,000lm	AC85-265V	15°/30°/45°/60°	2800-6500K	>80




IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S065-200W-B-SMD	200W	184.5*372.9*120mm	336pcs	PHILIPS LUMILEDS 3030	30000lm	AC100-265V	15°/30°/60°	2700-6500K	>80
KH-FL-S065-400W-B-SMD	400W	369.5*372.9*120mm	672pcs	PHILIPS LUMILEDS 3030	60000lm	AC100-265V	15°/30°/60°	2700-6500K	>80
KH-FL-S065-600W-B-SMD	600W	554.5*372.9*139mm	1008pcs	PHILIPS LUMILEDS 3030	90000lm	AC100-265V	15°/30°/60°	2700-6500K	>80
KH-FL-S065-800W-B-SMD	800W	739.5*372.9*139mm	1344pcs	PHILIPS LUMILEDS 3030	120000lm	AC100-265V	15°/30°/60°	2700-6500K	>80
KH-FL-S065-1000W-B-SMD	1000W	924.5*372.9*139mm	1680pcs	PHILIPS LUMILEDS 3030	150000lm	AC100-265V	15°/30°/60°	2700-6500K	>80
KH-FL-S065-1200W-B-SMD	1200W	554.5*745.9*139mm	2016pcs	PHILIPS LUMILEDS 3030	180000lm	AC100-265V	15°/30°/60°	2700-6500K	>80
KH-FL-S065-1600W-B-SMD	1600W	739.5*745.9*139mm	2688pcs	PHILIPS LUMILEDS 3030	240000lm	AC100-265V	15°/30°/60°	2700-6500K	>80
KH-FL-S065-2000W-B-SMD	2000W	924.5*745.9*139mm	3360pcs	PHILIPS LUMILEDS 3030	300000lm	AC100-265V	15°/30°/60°	2700-6500K	>80

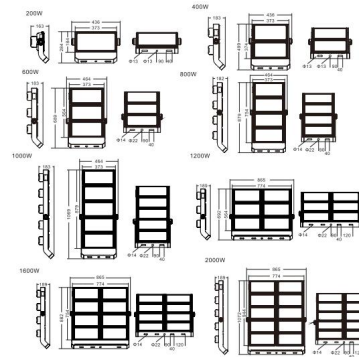

IP65 CE IK08 LED






Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S065-200W-B-SMD-B	200W	436*284*183mm	240	3030	30000lm	AC100-265V	10°/25°/60°	2800-6500K	>80
KH-FL-S065-400W-B-SMD-B	400W	436*499*183mm	480	3030	60000lm	AC100-265V	10°/25°/60°	2800-6500K	>80
KH-FL-S065-600W-B-SMD-B	600W	464*689*183mm	720	3030	90000lm	AC100-265V	10°/25°/60°	2800-6500K	>80
KH-FL-S065-800W-B-SMD-B	800W	464*879*183mm	960	3030	120000lm	AC100-265V	10°/25°/60°	2800-6500K	>80
KH-FL-S065-1000W-B-SMD-B	1000W	436*1069*183mm	1200	3030	150000lm	AC100-265V	10°/25°/60°	2800-6500K	>80
KH-FL-S065-1200W-B-SMD-B	1200W	865*692*189mm	1440	3030	180000lm	AC100-265V	10°/25°/60°	2800-6500K	>80
KH-FL-S065-1600W-B-SMD-B	1600W	865*882*189mm	1680	3030	210000lm	AC100-265V	10°/25°/60°	2800-6500K	>80
KH-FL-S065-2000W-B-SMD-B	2000W	865*1072*189mm	1920	3030	240000lm	AC100-265V	10°/25°/60°	2800-6500K	>80

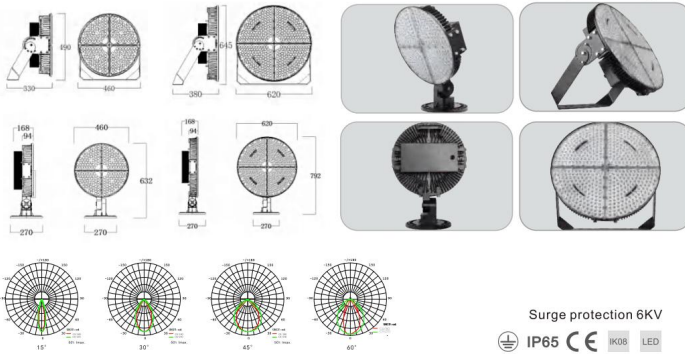



Surge protection 6KV



Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-R063-600W-B-SMD-A	600W	632*460*270mm	240	5050	90000lm	AC100-265V	10°/25°/60°	2800-6500K	>80
KH-FL-R063-1200W-B-SMD-A	1200W	792*620*270mm	480	5050	180000lm	AC100-265V	10°/25°/60°	2800-6500K	>80
KH-FL-R063-600W-B-SMD-B	600W	632*460*270mm	240	5050	90000lm	AC100-265V	10°/25°/60°	2800-6500K	>80
KH-FL-R063-1200W-B-SMD-B	1200W	792*620*270mm	480	5050	180000lm	AC100-265V	10°/25°/60°	2800-6500K	>80


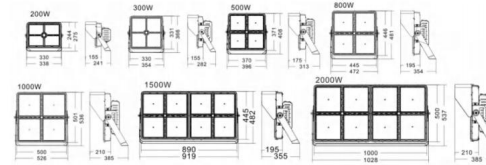


Model	Power	Size	Chip qty	LED chip	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S095-200W-B-SMD	200W	338*275*241mm	368	PHILIPS LUMILEDS 3030	30,000lm	AC100-265V	15°/30°/45°/60°	2800-6500K	>80
KH-FL-S095-300W-B-SMD	300W	354*366*282mm	560	PHILIPS LUMILEDS 3030	45,000lm	AC100-265V	15°/30°/45°/60°	2800-6500K	>80
KH-FL-S095-500W-B-SMD	500W	396*408*313mm	736	PHILIPS LUMILEDS 3030	75,000lm	AC100-265V	15°/30°/45°/60°	2800-6500K	>80
KH-FL-S095-720W-B-SMD	720W	472*481*354mm	1248	PHILIPS LUMILEDS 3030	108,000lm	AC100-265V	15°/30°/45°/60°	2800-6500K	>80
KH-FL-S095-960W-B-SMD	960W	526*536*385mm	1568	PHILIPS LUMILEDS 3030	144,000lm	AC100-265V	15°/30°/45°/60°	2800-6500K	>80
KH-FL-S095-1500W-B-SMD	1500W	919*482*355mm	2496	PHILIPS LUMILEDS 3030	225,000lm	AC100-265V	15°/30°/45°/60°	2800-6500K	>80
KH-FL-S095-2000W-B-SMD	2000W	1028*537*385mm	3136	PHILIPS LUMILEDS 3030	300,000lm	AC100-265V	15°/30°/45°/60°	2800-6500K	>80

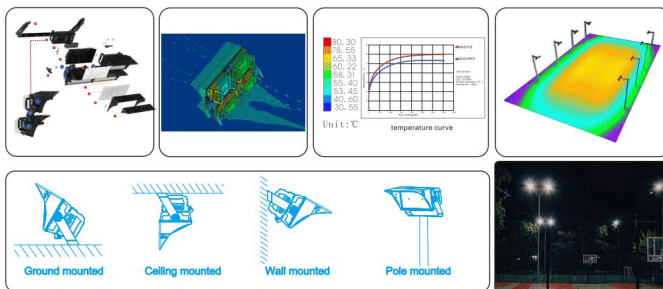

Surge protection 6KV
IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S086-500W-B-SMD-A	500W	540*250*349mm	920	3030	75000lm	AC100-265V	15°/30°/45°/60°	2800-6500K	>70
KH-FL-S086-1000W-B-SMD-A	1000W	540*520*604mm	1840	3030	150000lm	AC100-265V	15°/30°/45°/60°	2800-6500K	>70
KH-FL-S086-1500W-B-SMD-A	1500W	540*790*604mm	2760	3030	225000lm	AC100-265V	15°/30°/45°/60°	2800-6500K	>70
KH-FL-S086-2000W-B-SMD-A	2000W	540*1060*604mm	3830	3030	300000lm	AC100-265V	15°/30°/45°/60°	2800-6500K	>70

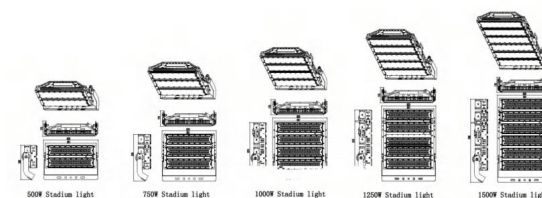

Surge protection 6KV
IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S070-500W-B-SMD	500W	365x625x175mm	192	PHILIPS LUMILED 5050	75000lm	AC100-265V	8°/20°/40°/30° 49°/21°/30x70°	2800-6500K	>80
KH-FL-S070-750W-B-SMD	750W	535x625x175mm	288	PHILIPS LUMILED 5050	112500lm	AC100-265V	8°/20°/40°/30° 49°/21°/30x70°	2800-6500K	>80
KH-FL-S070-1000W-B-SMD	1000W	676x625x175mm	384	PHILIPS LUMILED 5050	150000lm	AC100-265V	8°/20°/40°/30° 49°/21°/30x70°	2800-6500K	>80
KH-FL-S070-1250W-B-SMD	1250W	816x625x175mm	480	PHILIPS LUMILED 5050	187500lm	AC100-265V	8°/20°/40°/30° 49°/21°/30x70°	2800-6500K	>80
KH-FL-S070-1500W-B-SMD	1500W	956x625x175mm	576	PHILIPS LUMILED 5050	225000lm	AC100-265V	8°/20°/40°/30° 49°/21°/30x70°	2800-6500K	>80



TUNNEL LIGHT





Model	Power	Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S026-50W-B-SMD-B	50W	400*220*160mm	64pcs	6500lm	AC100-265V	30°/60°/90°	2700-6500K	>80



Model	Power	Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S026-100W-B-SMD-B	100W	400*280*160mm	128pcs	13000lm	AC100-265V	30°/60°/90°	2700-6500K	>80






Model	Power	Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S026-150W-B-SMD-B	150W	340*350*75mm	192pcs	19500lm	AC100-265V	30°/60°/90°	2700-6500K	>80



Model	Power	Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S026-200W-B-SMD-B	200W	380*310*160mm	256pcs	26000lm	AC100-265V	30°/60°/90°	2700-6500K	>80



Model	Power	Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S026-250W-B-SMD-B	250W	380*380*160mm	320pcs	32500lm	AC100-265V	30°/60°/90°	2700-6500K	>80



Surge protection 6KV


Model	Power	Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S026-300W-B-SMD-B	300W	380*460*160mm	384pcs	39000lm	AC100-265V	30°/60°/90°	2700-6500K	>80




Model	Power	Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S026-400W-B-SMD-B	400W	690*420*160mm	512pcs	52000lm	AC100-265V	30°/60°/90°	2700-6500K	>80



Model	Power	Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S026-500W-B-SMD-B	500W	690*500*160mm	640pcs	65000lm	AC100-265V	30°/60°/90°	2700-6500K	>80



Model	Power	Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S026-600W-B-SMD-B	600W	665*475*75mm	1440pcs	78000lm	AC100-265V	30°/60°/90°	2700-6500K	>80

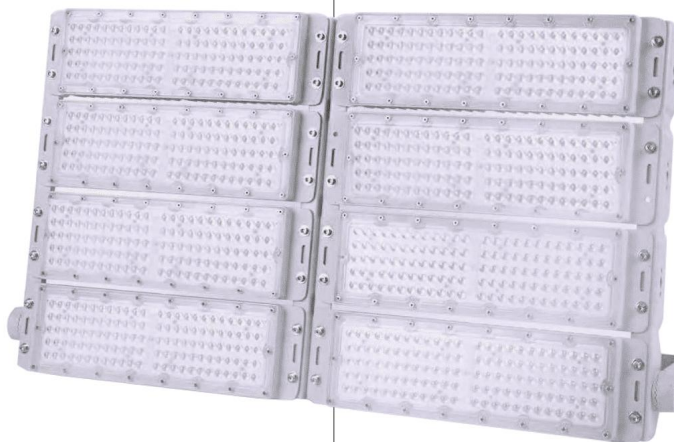

Model	Power	Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
-------	-------	------	----------	-------	---------	------------	-----	-----

KH-FL-S066-100W-B-SMD-B	100W	400*100*180mm	120pcs	13000lm	AC100-265V	30°/60°/90°	2700-6500K	>80
-------------------------	------	---------------	--------	---------	------------	-------------	------------	-----



Model	Power	Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
-------	-------	------	----------	-------	---------	------------	-----	-----

KH-FL-S066-200W-B-SMD-B	200W	400*205*180mm	240pcs	26000lm	AC100-265V	30°/60°/90°	2700-6500K	>80
-------------------------	------	---------------	--------	---------	------------	-------------	------------	-----



Model	Power	Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
-------	-------	------	----------	-------	---------	------------	-----	-----



KH-FL-S066-300W-B-SMD-B	300W	400*305*180mm	360pcs	39000lm	AC100-265V	30°/60°/90°	2700-6500K	>80
-------------------------	------	---------------	--------	---------	------------	-------------	------------	-----



Model	Power	Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
-------	-------	------	----------	-------	---------	------------	-----	-----


KH-FL-S066-400W-B-SMD-B	400W	400*410*180mm	480pcs	52000lm	AC100-265V	30°/60°/90°	2700-6500K	>80
-------------------------	------	---------------	--------	---------	------------	-------------	------------	-----

Surge protection 6KV



Model	Power	Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
-------	-------	------	----------	-------	---------	------------	-----	-----

KH-FL-S066-800W-B-SMD-B	800W	765*305*180mm	720pcs	78000lm	AC100-265V	30°/60°/90°	2700-6500K	>80
-------------------------	------	---------------	--------	---------	------------	-------------	------------	-----



Model	Power	Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
-------	-------	------	----------	-------	---------	------------	-----	-----

KH-FL-S066-1000W-B-SMD-B	1000W	765*410*180mm	960pcs	104000lm	AC100-265V	30°/60°/90°	2700-6500K	>80
--------------------------	-------	---------------	--------	----------	------------	-------------	------------	-----






Model	Power	Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
-------	-------	------	----------	-------	---------	------------	-----	-----

KH-FL-S066-1200W-B-SMD-B	1200W	765*510*180mm	1200pcs	130000lm	AC100-265V	30°/60°/90°	2700-6500K	>80
--------------------------	-------	---------------	---------	----------	------------	-------------	------------	-----




Model	Power	Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
-------	-------	------	----------	-------	---------	------------	-----	-----

KH-FL-S066-1200W-B-SMD-B	1200W	765*620*180mm	1440pcs	156000lm	AC100-265V	30°/60°/90°	2700-6500K	>80
--------------------------	-------	---------------	---------	----------	------------	-------------	------------	-----



FLOOD LIGHT



Surge protection 6KV



Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S047-50W-B-SMD	50W	310*190*45mm	77pcs	PHILIPS LUMILEDS 3030	7500lm	AC100-265V	60°/90°	2800-6500K	≥70
KH-FL-S047-100W-B-SMD	100W	395*250*55mm	147pcs	PHILIPS LUMILEDS 3030	15000lm	AC100-265V	60°/90°	2800-6500K	≥70
KH-FL-S047-200W-B-SMD	200W	395*360*55mm	294pcs	PHILIPS LUMILEDS 3030	30000lm	AC100-265V	60°/90°	2800-6500K	≥70
KH-FL-S047-300W-B-SMD	300W	395*360*55mm	441pcs	PHILIPS LUMILEDS 3030	45000lm	AC100-265V	60°/90°	2800-6500K	≥70
KH-FL-S047-400W-B-SMD	400W	495*395*60mm	588pcs	PHILIPS LUMILEDS 3030	60000lm	AC100-265V	60°/90°	2800-6500K	≥70

[illegible]