

KAYHIN | 01-B-1-03-23

BSCI BDID : 354685
ISO9001 : 2015

Kayhin lighting
Wechat



Kayhin lighting
WhatsApp



淇轩电器有限公司

电话: +86-760-22120818

传真: +86-760-22137118

邮箱: manager@kayhin.com

网站: www.kayhin.com

地址: 广东省中山市小榄镇泰弘南路2号汶权科技园F栋

Kayhin Electric Appliance Co., Ltd.

Tel: +86-760-22120818

Fax: +86-760-22137118

E-mail: manager@kayhin.com

Website: www.kayhin.com

Address: Wenquan industry park, No.2 Mincheng xi Road,
baofeng, Xiaolan Town, Zhongshan City, Guangdong, China.





COMPANY PROFILE

Kayhin Electric Appliance co., Ltd was established in 2000, and located in Zhongshan City of China. We are a LED professional manufacturer and exporter, our main concern is the design, quality and develeoment of the products, all of our items are complied with international quality standard, and our brand is known more and more by customers from all of the world.

We have our own professional engineering department, they are responsible for the products development and quality testing. Therefore our products quality and safety are guaranteed, and you can use low price to get much more better quality products, choose to work with us, will bring you more opportunity to expand your business, we are THE ONE you are looking for !!

For all of our products, we could make specifica size, types and colors according to your needs, you can send us your details and we will prepare the quotation and then send to you for reference.



Street Light



Flood Light




UFO Highbay

TRI-Proof Tube



LED Bulkhead Light



LED Solar Street Light





LED Solar Tube




LED Solar Flood Light




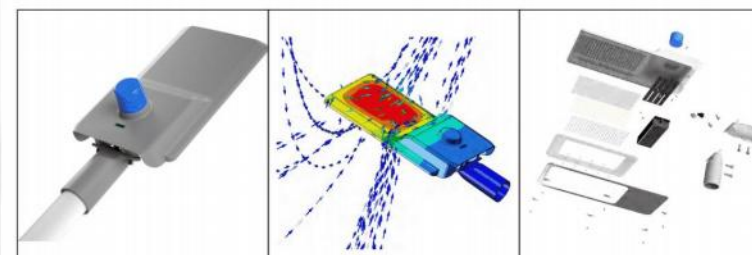

Surge protection 6KV




Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-SL-S093-50W-G-SMD	50W	515*190*98mm	96pcs	PHILIPS LUMILEDS 3030	6500lm	AC100-277V	T2M,T3M,T4M,60,90, 2800-6500K ≥70°*140		
KH-SL-S093-100W-G-SMD	100W	575*242*109mm	144pcs	PHILIPS LUMILEDS 3030	13000lm	AC100-277V	T2M,T3M,T4M,60,90, 2800-6500K ≥70°*140		
KH-SL-S093-150W-G-SMD	150W	615*262*110mm	192pcs	PHILIPS LUMILEDS 3030	19500lm	AC100-277V	T2M,T3M,T4M,60,90, 2800-6500K ≥70°*140		
KH-SL-S093-200W-G-SMD	200W	685*287*110mm	240pcs	PHILIPS LUMILEDS 3030	26000lm	AC100-277V	T2M,T3M,T4M,60,90, 2800-6500K ≥70°*140		



Surge protection 6KV





Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-SL-S088-50W-G-SMD	50W	483*230*127MM	96PCS	PHILIPS LUMILED 3030	6500lm	AC100-277V	150°75 T2/150°40 T3 143°85 T4/150°150 T5	2700-6500K	>70
KH-SL-S088-100W-G-SMD	100W	548*230*127MM	144PCS	PHILIPS LUMILED 3030	13000lm	AC100-277V	150°75 T2/150°40 T3 143°85 T4/150°150 T5	2700-6500K	>70
KH-SL-S088-150W-G-SMD	150W	598*257*129MM	192PCS	PHILIPS LUMILED 3030	19500lm	AC100-277V	150°75 T2/150°40 T3 143°85 T4/150°150 T5	2700-6500K	>70
KH-SL-S088-200W-G-SMD	200W	655*320*131MM	320PCS	PHILIPS LUMILED 3030	26000lm	AC100-277V	150°75 T2/150°40 T3 143°85 T4/150°150 T5	2700-6500K	>70



Surge protection 6KV



Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-SL-S089-50W-G-SMD	50W	408*230*106mm	80pcs	PHILIPS LUMILED 3030	6500lm	AC100-277V	150°75 T2/150°40 T3 143°85 T4/150°150 T5	2700-6500K	>70
KH-SL-S089-100W-G-SMD	100W	509*230*105mm	160pcs	PHILIPS LUMILED 3030	13000lm	AC100-277V	150°75 T2/150°40 T3 143°85 T4/150°150 T5	2700-6500K	>70
KH-SL-S089-150W-G-SMD	150W	600*257*108mm	240pcs	PHILIPS LUMILED 3030	19500lm	AC100-277V	150°75 T2/150°40 T3 143°85 T4/150°150 T5	2700-6500K	>70
KH-SL-S089-200W-G-SMD	200W	700*257*108mm	320pcs	PHILIPS LUMILED 3030	26000lm	AC100-277V	150°75 T2/150°40 T3 143°85 T4/150°150 T5	2700-6500K	>70

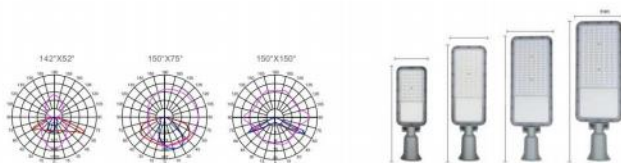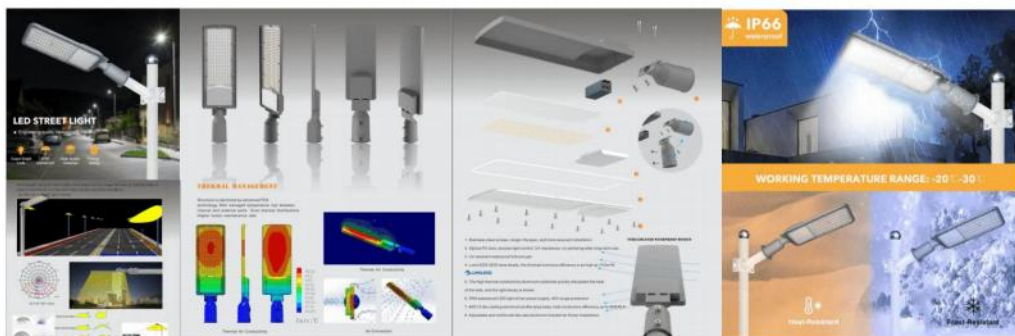




Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-SL101-50W-G-SMD	50W	460*120*70mm	72pcs	3030	5000lm	AC85-265V	135x60°	2800x6500K	≥70
KH-SL101-100W-G-SMD	100W	510*140*70mm	120pcs	3030	10000lm	AC85-265V	135x60°	2800x6500K	≥70
KH-SL101-150W-G-SMD	150W	581*160*70mm	168pcs	3030	15000lm	AC85-265V	135x60°	2800x6500K	≥70
KH-SL101-200W-G-SMD	200W	641*180*70mm	340pcs	3030	20000lm	AC85-265V	135x60°	2800x6500K	≥70

Surge protection 6KV
IP65 CE IK08 LED

MW
MEAN WELL
PHILIPS
5 Years
Warranty



LIGHTING SCHEMATIC VIEW




Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-SL-S055-30W-G-SMD	30W	507*210*143mm	36pcs	SMD 3030	3600lm	AC100-277V	T2M,T3M,T4M	2800-6500K	≥70
KH-SL-S055-60W-G-SMD	60W	507*210*143mm	72pcs	SMD 3030	7800lm	AC100-277V	T2M,T3M,T4M	2800-6500K	≥70
KH-SL-S055-80W-G-SMD	80W	616*259*186mm	96pcs	SMD 3030	10400lm	AC100-277V	T2M,T3M,T4M	2800-6500K	≥70
KH-SL-S055-120W-G-SMD	120W	676*303*186mm	144pcs	SMD 3030	15600lm	AC100-277V	T2M,T3M,T4M	2800-6500K	≥70
KH-SL-S055-150W-G-SMD	150W	676*303*186mm	180pcs	SMD 3030	19500lm	AC100-277V	T2M,T3M,T4M	2800-6500K	≥70
KH-SL-S055-200W-G-SMD	200W	850*366*198mm	240pcs	SMD 3030	26000lm	AC100-277V	T2M,T3M,T4M	2800-6500K	≥70

Surge protection 6KV
IP65 CE IK08 LED

PRODUCT DETAILS





OPTIONAL INTALLATION OF PHOTOCELL >>>>





MW
MEAN WELL
PHILIPS
LUMILED
5 Years
Warranty

Street Light

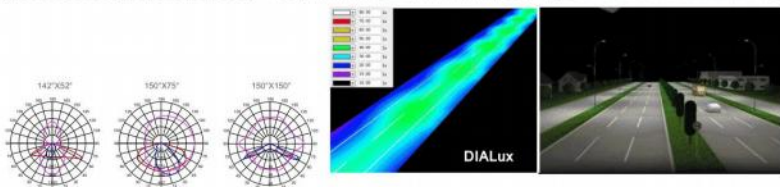
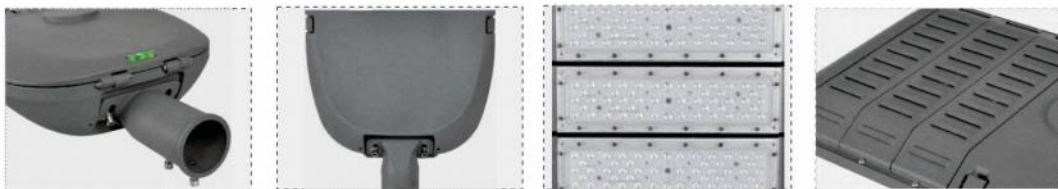


Surge protection 6KV

IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-SL-S078-50W-G-SMD	50W	620*315*135mm	56pcs	SMD 3030	6000lm	AC100-265V	135°70°	2800-6500K	≥70
KH-SL-S078-100W-G-SMD	100W	650*350*135mm	112pcs	SMD 3030	12000lm	AC100-265V	135°70°	2800-6500K	≥70
KH-SL-S078-150W-G-SMD	150W	730*350*135mm	168pcs	SMD 3030	18000lm	AC100-265V	135°70°	2800-6500K	≥70
KH-SL-S078-200W-G-SMD	200W	810*350*135mm	224pcs	SMD 3030	24000lm	AC100-265V	135°70°	2800-6500K	≥70
KH-SL-S078-250W-G-SMD	250W	890*350*135mm	280pcs	SMD 3030	30000lm	AC100-265V	135°70°	2800-6500K	≥70
KH-SL-S078-300W-G-SMD	300W	970*350*135mm	336pcs	SMD 3030	36000lm	AC100-265V	135°70°	2800-6500K	≥70

MW
MEAN WELL
PHILIPS
LUMILED
5 Years
Warranty

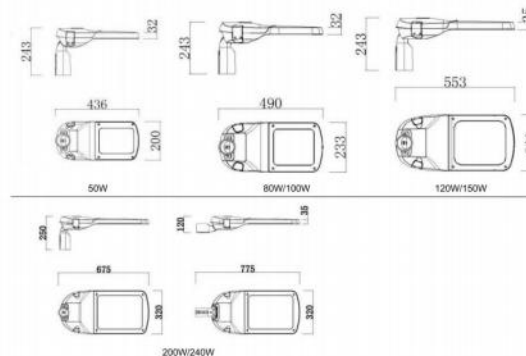

Surge protection 6KV

IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-SL-S062-50W-B-SMD	50W	436*243*120MM	72pcs	SMD 3030	6,500lm	AC100-265V	T2 T3 T4 T5	2700-6500K	>70
KH-SL-S062-80W-B-SMD	80W	583*244*120MM	108PCS	SMD 3030	10,400lm	AC100-265V	T2 T3 T4 T5	2700-6500K	>70
KH-SL-S062-100W-B-SMD	100W	583*244*120MM	144PCS	SMD 3030	13,000lm	AC100-265V	T2 T3 T4 T5	2700-6500K	>70
KH-SL-S062-120W-B-SMD	120W	673*260*120MM	144PCS	SMD 3030	15,600lm	AC100-265V	T2 T3 T4 T5	2700-6500K	>70
KH-SL-S062-150W-B-SMD	150W	673*260*122MM	192PCS	SMD 3030	19,500lm	AC100-265V	T2 T3 T4 T5	2700-6500K	>70
KH-SL-S062-200W-B-SMD	200W	775*320*120MM	240PCS	SMD 3030	26,000lm	AC100-265V	T2 T3 T4 T5	2700-6500K	>70
KH-SL-S062-240W-B-SMD	240W	775*320*120MM	320PCS	SMD 3030	31,200lm	AC100-265V	T2 T3 T4 T5	2700-6500K	>70



Street Light



IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-SL-S079-50W-G-SMD-B	50W	480x315x90mm	56W	SMD 3030	6000lm	AC100-265V	135°70°	2800-6500K	≥70
KH-SL-S079-100W-G-SMD-B	100W	540°315°90mm	112pcs	SMD 3030	12000 lm	AC100-265V	135°70°	2800-6500K	≥70
KH-SL-S079-150W-G-SMD-B	150W	620°315°90mm	168pcs	SMD 3030	18000lm	AC100-265V	135°70°	2800-6500K	≥70
KH-SL-S079-200W-G-SMD-B	200W	700°315°90mm	224pcs	SMD 3030	24000lm	AC100-265V	135°70°	2800-6500K	≥70
KH-SL-S079-250W-G-SMD-B	250W	780°315°90mm	280pcs	SMD 3030	30000lm	AC100-265V	135°70°	2800-6500K	≥70
KH-SL-S079-300W-G-SMD-B	300W	620°315°90mm	336pcs	SMD 3030	36000lm	AC100-265V	135°70°	2800-6500K	≥70





Street Light




IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-SL081-30W-B-SMD	30W	380°172°65mm	36pcs	SMD 3030	3300 lm	AC100-265V	140°70°	2800-6500K	≥70
KH-SL081-50W-B-SMD	50W	420°200°70mm	60pcs	SMD 3030	5500lm	AC100-265V	140°70°	2800-6500K	≥70
KH-SL081-100W-B-SMD	100W	495°215°80mm	120pcs	SMD 3030	11000lm	AC100-265V	140°70°	2800-6500K	≥70
KH-SL081-150W-B-SMD	150W	540°215°80mm	150pcs	SMD 3030	16500lm	AC100-265V	140°70°	2800-6500K	≥70
KH-SL081-200W-B-SMD	200W	600°235°80mm	200pcs	SMD 3030	22000lm	AC100-265V	140°70°	2800-6500K	≥70

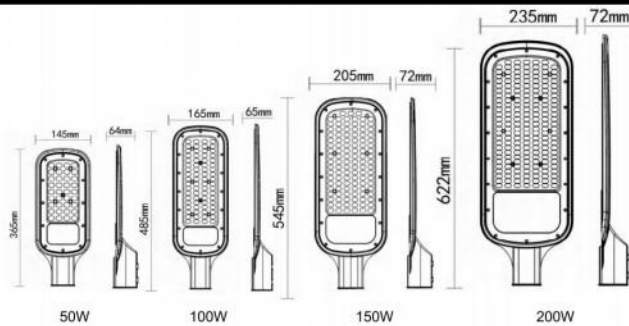

IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-SL-S085-50W-G-SMD	50W	365*145*64mm	72pcs	SMD 3030	4500lm	AC170-277V	140°70°	2800-6500K	≥70
KH-SL-S085-100W-G-SMD	100W	485*165*65mm	128pcs	SMD 3030	9000lm	AC170-277V	140°70°	2800-6500K	≥70
KH-SL-S085-150W-G-SMD	150W	545*205*72mm	192pcs	SMD 3030	16200lm	AC170-277V	140°70°	2800-6500K	≥70
KH-SL-S085-200W-G-SMD	200W	622*235*72mm	228pcs	SMD 3030	18000lm	AC170-277V	140°70°	2800-6500K	≥70



IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	Surge	CCT	CRI
KH-SL094-50W-G-DOB	50W	390*160*75MM	90pcs	SMD 3030	4500lm	AC165-265V/AC100-265V	65x135°	4KV	2700-6500K	>70
KH-SL094-100W-G-DOB	100W	470*200*75MM	144PCS	SMD 3030	9000lm	AC165-265V/AC100-265V	65x135°	4KV	2700-6500K	>70
KH-SL094-150W-G-DOB	150W	530*220*75MM	216PCS	SMD 3030	16200lm	AC165-265V/AC100-265V	65x135°	4KV	2700-6500K	>70
KH-SL094-200W-G-DOB	200W	600*250*75MM	252PCS	SMD3030	18000lm	AC165-265V/AC100-265V	65x135°	4KV	2700-6500K	>70



IP65 CE IK08 LED


Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-SL-S076-20W-B-SMD	20W	300*104*45mm	20pcs	SMD 3030	2000lm	AC100-265V	120°60°	2800-6500K	≥70
KH-SL-S076-30W-B-SMD	30W	340*125*48mm	30pcs	SMD 3030	3000lm	AC100-265V	120°60°	2800-6500K	≥70
KH-SL-S076-50W-B-SMD	50W	390*147*60mm	60pcs	SMD 3030	5000lm	AC100-265V	120°60°	2800-6500K	≥70
KH-SL-S076-100W-B-SMD	100W	452*171*60mm	100pcs	SMD 3030	10000lm	AC100-265V	120°60°	2800-6500K	≥70



IP65 CE IK08 LED



Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-SL-S077-20W-B-SMD	20W	315*128*76mm	20pcs	SMD 3030	2000lm	AC100-265V	120°60°	2800-6500K	≥70
KH-SL-S077-30W-B-SMD	30W	351*142*76mm	30pcs	SMD 3030	3000lm	AC100-265V	120°60°	2800-6500K	≥70
KH-SL-S077-50W-B-SMD	50W	405*166*79mm	60pcs	SMD 3030	5000lm	AC100-265V	120°60°	2800-6500K	≥70
KH-SL-S077-100W-B-SMD	100W	484*211*83mm	100pcs	SMD 3030	10000lm	AC100-265V	120°60°	2800-6500K	≥70
KH-SL-S077-120W-B-SMD	120W	484*211*83mm	120pcs	SMD 3030	12000lm	AC100-265V	120°60°	2800-6500K	≥70
KH-SL-S077-150W-B-SMD	150W	580*242*83mm	180pcs	SMD 3030	15000lm	AC100-265V	120°60°	2800-6500K	≥70
KH-SL-S077-200W-B-SMD	200W	580*242*83mm	240pcs	SMD 3030	20000lm	AC100-265V	120°60°	2800-6500K	≥70
KH-SL-S077-250W-B-SMD	250W	580*242*83mm	250pcs	SMD 3030	24000lm	AC100-265V	120°60°	2800-6500K	≥70



30W



50W




150W



200W

IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-SL-S048-30W-G-SMD	30W	495*170*55mm	35pcs	3030	3000lm	AC100-277V	120°60°	2800-6500K	≥ 70
KH-SL-S048-50W-G-SMD	50W	540*195*60mm	55pcs	3030	5000lm	AC100-277V	120°60°	2800-6500K	≥ 70
KH-SL-S048-100W-G-SMD	100W	700*245*90mm	110pcs	3030	10000lm	AC100-277V	120°60°	2800-6500K	≥ 70
KH-SL-S048-150W-G-SMD	150W	772*280*90mm	165pcs	3030	15000lm	AC100-277V	120°60°	2800-6500K	≥ 70
KH-SL-S048-200W-G-SMD	200W	772*280*90mm	220pcs	3030	20000lm	AC100-277V	120°60°	2800-6500K	≥ 70
KH-SL-S048-240W-G-SMD	240W	772*280*90mm	250pcs	3030	25000lm	AC100-277V	120°60°	2800-6500K	≥ 70



30W



50W



100W





150W



200W

IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-SL-S048-30W-G-MCOB	30W	350*150*55mm	30pcs	3030	3000lm	AC100-277V	145°90°	2800-6500K	≥ 70
KH-SL-S048-50W-G-MCOB	50W	500*212*63mm	45pcs	3030	5000lm	AC100-277V	145°90°	2800-6500K	≥ 70
KH-SL-S048-100W-G-MCOB	100W	725*280*80mm	90pcs	3030	10000lm	AC100-277V	145°90°	2800-6500K	≥ 70
KH-SL-S048-150W-G-MCOB	150W	855*330*83mm	135pcs	3030	15000lm	AC100-277V	145°90°	2800-6500K	≥ 70
KH-SL-S048-200W-G-MCOB	200W	950*355*87mm	180pcs	3030	20000lm	AC100-277V	145°90°	2800-6500K	≥ 70
KH-SL-S048-250W-G-MCOB	250W	1100*335*80mm	225pcs	3030	25000lm	AC100-277V	145°90°	2800-6500K	≥ 70

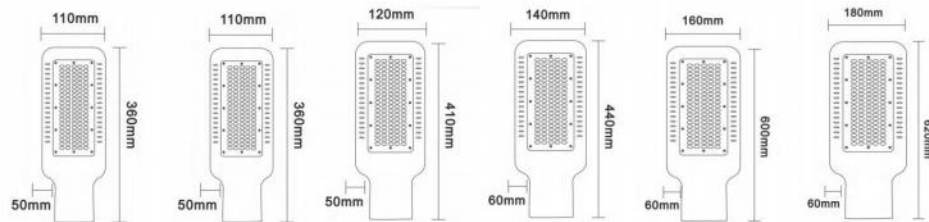


IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-SL-S050-20W-B-SMD	20W	280*110*40mm	20pcs	3030	2000lm	AC100-277V	120°60°	2800-6500K	≥ 70
KH-SL-S050-30W-B-SMD	30W	310*125*40mm	30pcs	3030	3000lm	AC100-277V	120°60°	2800-6500K	≥ 70
KH-SL-S050-50W-B-SMD	50W	400*180*50mm	50pcs	3030	5000lm	AC100-277V	120°60°	2800-6500K	≥ 70
KH-SL-S050-100W-B-SMD	100W	528*180*50mm	100pcs	3030	10000lm	AC100-277V	120°60°	2800-6500K	≥ 70
KH-SL-S050-150W-B-SMD	150W	630*195*65mm	150pcs	3030	15000lm	AC100-277V	120°60°	2800-6500K	≥ 70
KH-SL-S050-200W-B-SMD	200W	650*200*50mm	200pcs	3030	20000lm	AC100-277V	120°60°	2800-6500K	≥ 70

5 Years
Warranty






Pole Connectors:

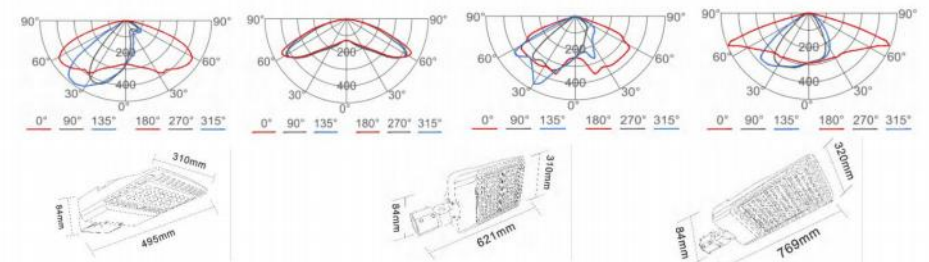




IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-SL-S052-100W-B-SMD	100W	495*310*84mm	108	3030	13000lm	AC100-277V	T1/T2/T3/T4/T5	2800-6500K	>70
KH-SL-S052-200W-B-SMD	100W	621*310*84mm	216	3030	26000lm	AC100-277V	T1/T2/T3/T4/T5	2800-6500K	>70
KH-SL-S052-300W-B-SMD	300W	769*320*84mm	324	3030	39000lm	AC100-277V	T1/T2/T3/T4/T5	2800-6500K	>70



IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-SL-S053-90W-B-SMD	90W	490*215*90mm	90	3030	9900lm	AC100-277V	T2	2800-6500K	>70
KH-SL-S053-150W-B-SMD	150W	490*290*90mm	180	3030	16500lm	AC100-277V	T2	2800-6500K	>70
KH-SL-S053-300W-B-SMD	300W	870*290*90mm	380	3030	33000lm	AC100-277V	T2	2800-6500K	>70



IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-SL-S054-100W-B-SMD	100W	422*318*138mm	96	3030	11000lm	AC100-277V	T2	2800-6500K	>70
KH-SL-S054-150W-B-SMD	150W	522*318*138mm	144	3030	16500lm	AC100-277V	T2	2800-6500K	>70
KH-SL-S054-180W-B-SMD	180W	600*318*138mm	192	3030	19800lm	AC100-277V	T2	2800-6500K	>70
KH-SL-S054-240W-B-SMD	240W	720*318*138mm	288	3030	26400lm	AC100-277V	T2	2800-6500K	>70
KH-SL-S054-300W-B-SMD	300W	853*318*138mm	384	3030	33000lm	AC100-277V	T2	2800-6500K	>70




STREET LIGHT VERSION

50W/80W/100W/150W/200W/250W



PHILIPS

**5 Years
Warranty**

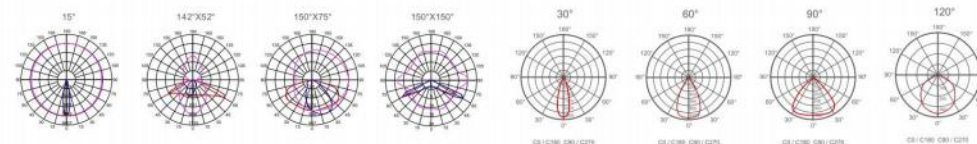

IP65 CE IK08 LED

Model	Power	Size	Lens	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-SL-S068-50W-G-SMD	50W	560*220*50mm	8in1	72pcs	Philips3030	130lm/W	AC100-265V	15°/30°/60°/90°/120°/150°/90X90°/142X52°/150X150°/150X75°	2700-6500K	>80
KH-SL-S068-80W-G-SMD-A	80W	560*220*50mm	12in1	108pcs	Philips3030	130lm/W	AC100-265V	15°/30°/60°/90°/120°/150°/90X90°/142X52°/150X150°/150X75°	2700-6500K	>80
KH-SL-S068-80W-G-SMD-B	80W	560*220*50mm	16in1	144pcs	Philips3030	150lm/W	AC100-265V	15°/30°/60°/90°/120°/150°/90X90°/142X52°/150X150°/150X75°	2700-6500K	>80
KH-SL-S068-100W-G-SMD	100W	560*262*50mm	8in1	128pcs	Philips3030	130lm/W	AC100-265V	15°/30°/60°/90°/120°/150°/90X90°/142X52°/150X150°/150X75°	2700-6500K	>80
KH-SL-S068-150W-G-SMD-A	150W	560*262*50mm	12in1	192pcs	Philips3030	130lm/W	AC100-265V	15°/30°/60°/90°/120°/150°/90X90°/142X52°/150X150°/150X75°	2700-6500K	>80
KH-SL-S068-150W-G-SMD-B	150W	560*262*50mm	16in1	256pcs	Philips3030	150lm/W	AC100-265V	15°/30°/60°/90°/120°/150°/90X90°/142X52°/150X150°/150X75°	2700-6500K	>80
KH-SL-S068-200W-G-SMD	200W	670*322*50mm	8in1	200pcs	Philips3030	130lm/W	AC100-265V	15°/30°/60°/90°/120°/150°/90X90°/142X52°/150X150°/150X75°	2700-6500K	>80
KH-SL-S068-250W-G-SMD-A	250W	670*322*50mm	12in1	300pcs	Philips3030	130lm/W	AC100-265V	15°/30°/60°/90°/120°/150°/90X90°/142X52°/150X150°/150X75°	2700-6500K	>80
KH-SL-S068-250W-G-SMD-B	250W	670*322*50mm	16in1	400pcs	Philips3030	150lm/W	AC100-265V	15°/30°/60°/90°/120°/150°/90X90°/142X52°/150X150°/150X75°	2700-6500K	>80

FLOOD LIGHT





LED Type: SMD3030
Material: Die-cast Aluminum, pc lens
Lamp Size: 218*155*48mm
Voltage: AC100-265V/50-60Hz



LED Type: SMD3030
Material: Die-cast Aluminum, pc lens
Lamp Size: 235*216*50mm
Voltage: AC100-265V/50-60Hz



LED Type: SMD3030
Material: Die-cast Aluminum, pc lens
Lamp Size: 320*262*60mm
Voltage: AC100-265V/50-60Hz



LED Type: SMD3030
Material: Die-cast Aluminum, pc lens
Lamp Size: 434*320*60mm
Voltage: AC100-265V/50-60Hz




LED Type: SMD3030
Material: Die-cast Aluminum, pc lens
Lamp Size: 295*216*50mm
Voltage: AC100-265V/50-60Hz



LED Type: SMD3030
Material: Die-cast Aluminum, pc lens
Lamp Size: 374*268*60mm
Voltage: AC100-265V/50-60Hz




LED Type: SMD3030
Material: Die-cast Aluminum, pc lens
Lamp Size: 495*373*60mm
Voltage: AC100-265V/50-60Hz

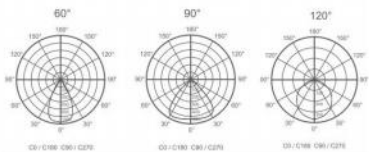

IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S097-50W-B-SMD	50W	218*155*48mm	60pcs	SMD 3030	6000lm	AC100-265V	90°/120°	2800-6500K	≥70
KH-FL-S097-70W-B-SMD	70W	235*216*50mm	72pcs	SMD 3030	8400lm	AC100-265V	90°/120°	2800-6500K	≥70
KH-FL-S097-100W-B-SMD	100W	295*216*50mm	108pcs	SMD 3030	12000lm	AC100-265V	90°/120°	2800-6500K	≥70
KH-FL-S097-150W-B-SMD	150W	320*262*60mm	144pcs	SMD 3030	18000lm	AC100-265V	90°/120°	2800-6500K	≥70
KH-FL-S097-200W-B-SMD	200W	374*268*60mm	192pcs	SMD 3030	24000lm	AC100-265V	90°/120°	2800-6500K	≥70
KH-FL-S097-300W-B-SMD	300W	434*320*60mm	300pcs	SMD 3030	36000lm	AC100-265V	90°/120°	2800-6500K	≥70
KH-FL-S097-400W-B-SMD	400W	495*373*60mm	432pcs	SMD 3030	48000lm	AC100-265V	90°/120°	2800-6500K	≥70

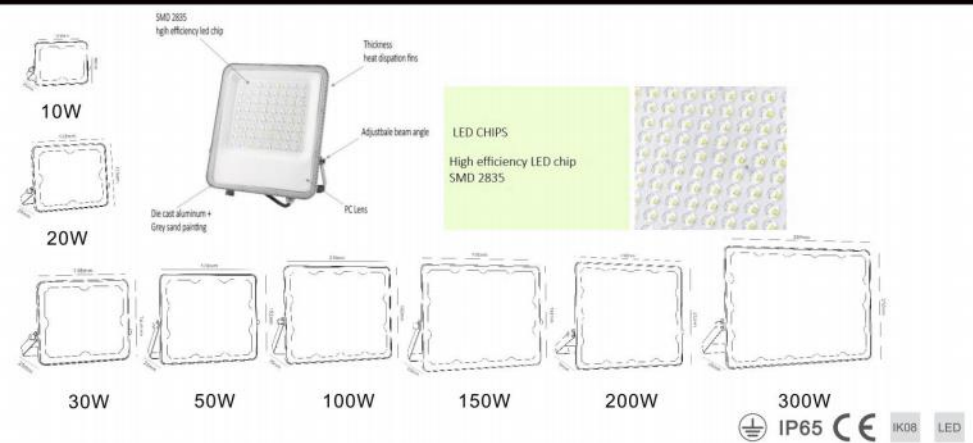


Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S096-10W-B-SMD	10W	118*90*25mm	12pcs	SMD 2835	900lm	AC100-265V	90°/120°	2800-6500K	≥70
KH-FL-S096-20W-B-SMD	20W	138*113*25mm	24pcs	SMD 2835	1800lm	AC100-265V	90°/120°	2800-6500K	≥70
KH-FL-S096-30W-B-SMD	30W	148*123*25mm	36pcs	SMD 2835	2700lm	AC100-265V	90°/120°	2800-6500K	≥70
KH-FL-S096-50W-B-SMD	50W	178*152*25mm	72pcs	SMD 2835	4500lm	AC100-265V	90°/120°	2800-6500K	≥70
KH-FL-S096-100W-B-SMD	100W	218*182*25mm	144pcs	SMD 2835	9000lm	AC100-265V	90°/120°	2800-6500K	≥70
KH-FL-S096-150W-B-SMD	150W	238*192*25mm	180pcs	SMD 2835	13500lm	AC100-265V	90°/120°	2800-6500K	≥70
KH-FL-S096-200W-B-SMD	200W	238*212*25mm	216pcs	SMD 2835	18000lm	AC100-265V	90°/120°	2800-6500K	≥70
KH-FL-S096-300W-B-SMD	300W	298*212*25mm	300pcs	SMD 2835	27000lm	AC100-265V	90°/120°	2800-6500K	≥70



Glass



Lens

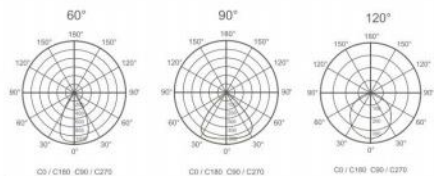

IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S084-30W-W-SMD	30W	160*180*35mm	40pcs	SMD 3030	3600lm	AC100-277V	90°/120°	2800-6500K	≥70
KH-FL-S084-50W-W-SMD	50W	190*220*35mm	60pcs	SMD 3030	6000lm	AC100-277V	90°/120°	2800-6500K	≥70
KH-FL-S084-100W-W-SMD	100W	240*280*55mm	120pcs	SMD 3030	12000lm	AC100-277V	90°/120°	2800-6500K	≥70
KH-FL-S084-150W-W-SMD	150W	270*310*50mm	180pcs	SMD 3030	18000lm	AC100-277V	90°/120°	2800-6500K	≥70
KH-FL-S084-200W-W-SMD	200W	300*345*55mm	240pcs	SMD 3030	24000lm	AC100-277V	90°/120°	2800-6500K	≥70
KH-FL-S084-300W-W-SMD	300W	325*380*55mm	360pcs	SMD 3030	36000lm	AC100-277V	90°/120°	2800-6500K	≥70



IP66 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S072-30W-W-SMD	30W	205*186*50mm	45pcs	SANAN 3030	3600lm	AC100-265V	60° 90°	2800-6500K	≥70
KH-FL-S072-50W-W-SMD	50W	245*235*48mm	70pcs	SANAN 3030	6000lm	AC100-265V	60° 90°	2800-6500K	≥70
KH-FL-S072-100W-W-SMD	100W	298*288*50mm	140pcs	SANAN 3030	12000lm	AC100-265V	60° 90°	2800-6500K	≥70
KH-FL-S072-150W-W-SMD	150W	340*330*64mm	210pcs	SANAN 3030	18000lm	AC100-265V	60° 90°	2800-6500K	≥70
KH-FL-S072-200W-W-SMD	200W	370*359*64mm	280pcs	SANAN 3030	24000lm	AC100-265V	60° 90°	2800-6500K	≥70



IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S073-30W-W-SMD	30W	205*175*52mm	60pcs	2835	3600lm	AC100-265V	60° 90°	2800-6500K	≥70
KH-FL-S073-50W-W-SMD	50W	245*215*55mm	100pcs	2835	6000lm	AC100-265V	60° 90°	2800-6500K	≥70
KH-FL-S073-100W-W-SMD	100W	305*260*65mm	200pcs	2835	12000lm	AC100-265V	60° 90°	2800-6500K	≥70
KH-FL-S073-150W-W-SMD	150W	325*280*55mm	300pcs	2835	18000lm	AC100-265V	60° 90°	2800-6500K	≥70
KH-FL-S073-200W-W-SMD	200W	375*315*90mm	400pcs	2835	24000lm	AC100-265V	60° 90°	2800-6500K	≥70
KH-FL-S073-300W-W-SMD	300W	495*445*100mm	600pcs	2835	36000lm	AC100-265V	60° 90°	2800-6500K	≥70
KH-FL-S073-400W-W-SMD	400W	495*445*100mm	800pcs	2835	48000lm	AC100-265V	60° 90°	2800-6500K	≥70



Flood Light



IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S075-30W-W-SMD	30W	165*194*48mm	60pcs	SANAN 2835	3000lm	AC100-265V	120°	2800-6500K	≥70
KH-FL-S075-50W-W-SMD	50W	210*242*50mm	100pcs	SANAN 2835	5000lm	AC100-265V	120°	2800-6500K	≥70
KH-FL-S075-100W-W-SMD	100W	257*286*60mm	200pcs	SANAN 2835	10000lm	AC100-265V	120°	2800-6500K	≥70
KH-FL-S075-150W-W-SMD	150W	310*346*62mm	300pcs	SANAN 2835	15000lm	AC100-265V	120°	2800-6500K	≥70
KH-FL-S075-200W-W-SMD	200W	310*346*62mm	400pcs	SANAN 2835	20000lm	AC100-265V	120°	2800-6500K	≥70
KH-FL-S075-300W-W-SMD	300W	400*360*62mm	600pcs	SANAN 2835	30000lm	AC100-265V	120°	2800-6500K	≥70



Flood Light Economic




IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S071-10W-B-SMD	10W	100*80*20mm	10pcs	2835	800lm	AC85-265V/175-265V	120°	2800-6500K	≥70
KH-FL-S071-20W-B-SMD	20W	115*90*25mm	20pcs	2835	1600lm	AC85-265V/175-265V	120°	2800-6500K	≥70
KH-FL-S071-30W-B-SMD	30W	155*113*29mm	30pcs	2835	2400lm	AC85-265V/175-265V	120°	2800-6500K	≥70
KH-FL-S071-50W-B-SMD	50W	204*159*33mm	50pcs	2835	4000lm	AC85-265V/175-265V	120°	2800-6500K	≥70
KH-FL-S071-100W-B-SMD	100W	270*207*35mm	100pcs	2835	8000lm	AC85-265V/175-265V	120°	2800-6500K	≥70
KH-FL-S071-150W-B-SMD	150W	270*228*40mm	150pcs	2835	12000lm	AC85-265V/175-265V	120°	2800-6500K	≥70
KH-FL-S071-200W-B-SMD	200W	382*280*35mm	200pcs	2835	16000lm	AC85-265V/175-265V	120°	2800-6500K	≥70
KH-FL-S071-300W-B-SMD	300W	450*328*46mm	300pcs	2835	24000lm	AC85-265V/175-265V	120°	2800-6500K	≥70



FLOOD LIGHT

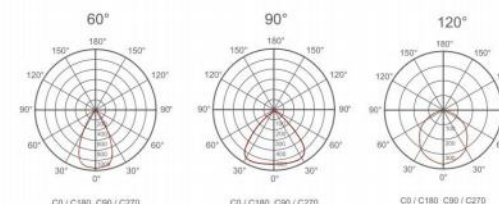

IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S087-30W-B-SMD	30W	159*176*34mm	60pcs	2835	2400lm	AC100-265V	60°/90°/120°	2800-6500K	≥70
KH-FL-S087-50W-B-SMD	50W	206*244*40mm	96pcs	2835	4500lm	AC100-265V	60°/90°/120°	2800-6500K	≥70
KH-FL-S087-100W-B-SMD	100W	258*300*41mm	192pcs	2835	9000lm	AC100-265V	60°/90°/120°	2800-6500K	≥70
KH-FL-S087-150W-B-SMD	150W	286*323*44mm	240pcs	2835	13500lm	AC100-265V	60°/90°/120°	2800-6500K	≥70
KH-FL-S087-200W-B-SMD	200W	325*365*49mm	312pcs	2835	18000lm	AC100-265V	60°/90°/120°	2800-6500K	≥70
KH-FL-S087-300W-B-SMD	300W	368*411*54mm	480pcs	2835	27000lm	AC100-265V	60°/90°/120°	2800-6500K	≥70




Model	Power	Size	Light source	Lumen	Voltage	CCT	CRI
KH-FL-S014-10W-B-SMD-THIN	10W	115*85*40MM	20pcs-2835	800-900LM	AC100-265V	3000-6500K	>75
KH-FL-S014-20W-B-SMD-THIN	20W	180*140*35MM	40pcs-2835	1600-1800LM	AC100-265V	3000-6500K	>75
KH-FL-S014-30W-B-SMD-THIN	30W	225*185*45MM	60pcs-2835	2400-2700LM	AC100-265V	3000-6500K	>75
KH-FL-S014-50W-B-SMD-THIN	50W	285*235*45MM	100pcs-2835	4000-4500LM	AC100-265V	3000-6500K	>75
KH-FL-S014-70W-B-SMD-THIN	70W	320*270*65MM	140pcs-2835	5600-6300LM	AC100-265V	3000-6500K	>75
KH-FL-S014-100W-B-SMD-THIN	100W	350*300*75MM	200pcs-2835	8000-9000LM	AC100-265V	3000-6500K	>75




Model	Power	Size	Light source	Lumen	Voltage	CCT	CRI
KH-FL-S014-10W-B-SMD-THICK	10W	130*110*40MM	18pcs-2835	800-900LM	AC100-265V	3000-6500K	>75
KH-FL-S014-20W-B-SMD-THICK	20W	200*150*50MM	20pcs-2835	1600-1800LM	AC100-265V	3000-6500K	>75
KH-FL-S014-30W-B-SMD-THICK	30W	275*190*60MM	27pcs-2835	2400-2700LM	AC100-265V	3000-6500K	>75
KH-FL-S014-50W-B-SMD-THICK	50W	335*235*70MM	45pcs-2835	4000-4500LM	AC100-265V	3000-6500K	>75
KH-FL-S014-100W-B-SMD-THICK	100W	400*310*85MM	90pcs-2835	8000-9000LM	AC100-265V	3000-6500K	>75
KH-FL-S014-150W-B-SMD-THICK	150W	425*325*105MM	135pcs-2835	12000-13500LM	AC100-265V	3000-6500K	>75
KH-FL-S014-200W-B-SMD-A-THICK	200W	525*325*52MM	180pcs-2835	16000-18000LM	AC100-265V	3000-6500K	>75
KH-FL-S014-200W-B-SMD-B-THICK	200W	457*385*127MM	400pcs-2835	16000-18000LM	AC100-265V	3000-6500K	>75
KH-FL-S014-300W-B-SMD-THICK	300W	500*425*133MM	600pcs-2835	24000-27000LM	AC100-265V	3000-6500K	>75
KH-FL-S014-400W-B-SMD-THICK	400W	498*495*133MM	800pcs-2835	32000-36000LM	AC100-265V	3000-6500K	>75




Model	Power	Size	Light source	Lumen	Voltage	CCT	CRI
KH-FL-S018-10W-B-SMD-THIN	10W	128*120*40MM	18pcs-2835	800-900LM	AC100-265V	3000-6500K	>75




Model	Power	Size	Light source	Lumen	Voltage	CCT	CRI
KH-FL-S018-20W-B-SMD-THIN	20W	184*181*40MM	40pcs-2835	1600-1800LM	AC100-265V	3000-6500K	>75



Model	Power	Size	Light source	Lumen	Voltage	CCT	CRI
KH-FL-S018-30W-B-SMD-THIN	30W	227*223*42MM	60pcs-2835	2400-2700LM	AC100-265V	3000-6500K	>75




Model	Power	Size	Light source	Lumen	Voltage	CCT	CRI
KH-FL-S018-50W-B-SMD-THIN	50W	283*273*57MM	100pcs-2835	4000-4500LM	AC100-265V	3000-6500K	>75



Model	Power	Size	Light source	Lumen	Voltage	CCT	CRI
KH-FL-S018-10W-B-SMD-THICK	10W	127*120*44mm	20pcs-2835	800-900lm	AC100-265V	2800K-6500K	>75
KH-FL-S018-20W-B-SMD-THICK	20W	185*181*47mm	40pcs-2835	1600-1800lm	AC100-265V	2800K-6500K	>75
KH-FL-S018-30W-B-SMD-THICK	30W	226*222*54mm	60pcs-2835	2400-2700lm	AC100-265V	2800K-6500K	>75
KH-FL-S018-50W-B-SMD-THICK	50W	285*274*65mm	100pcs-2835	4000-4500lm	AC100-265V	2800K-6500K	>75
KH-FL-S018-100W-B-SMD-THICK	100W	292*291*90mm	200pcs-2835	8000-9000lm	AC100-265V	2800K-6500K	>75
KH-FL-S018-150W-B-SMD-THICK	150W	334*316*92mm	300pcs-2835	12000-13500lm	AC100-265V	2800K-6500K	>75
KH-FL-S018-200W-B-SMD-THICK	200W	375*375*110mm	400pcs-2835	16000-18000lm	AC100-265V	2800K-6500K	>75
KH-FL-S018-250W-B-SMD-THICK	250W	430*390*120mm	500pcs-2835	20000-22500lm	AC100-265V	2800K-6500K	>75




FLOOD LIGHT




IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S047-50W-B-SMD	50W	280*190*45mm	77pcs	PHILIPS LUMILEDS 3030	6500lm	AC100-265V	60°/90°	2800-6500K	≥ 70
KH-FL-S047-100W-B-SMD	100W	420*250*55mm	147pcs	PHILIPS LUMILEDS 3030	13000lm	AC100-265V	60°/90°	2800-6500K	≥ 70
KH-FL-S047-200W-B-SMD	200W	420*350*55mm	294pcs	PHILIPS LUMILEDS 3030	26000lm	AC100-265V	60°/90°	2800-6500K	≥ 70
KH-FL-S047-300W-B-SMD	300W	420*490*55mm	441pcs	PHILIPS LUMILEDS 3030	39000lm	AC100-265V	60°/90°	2800-6500K	≥ 70
KH-FL-S047-400W-B-SMD	400W	585*395*60mm	588pcs	PHILIPS LUMILEDS 3030	52000lm	AC100-265V	60°/90°	2800-6500K	≥ 70

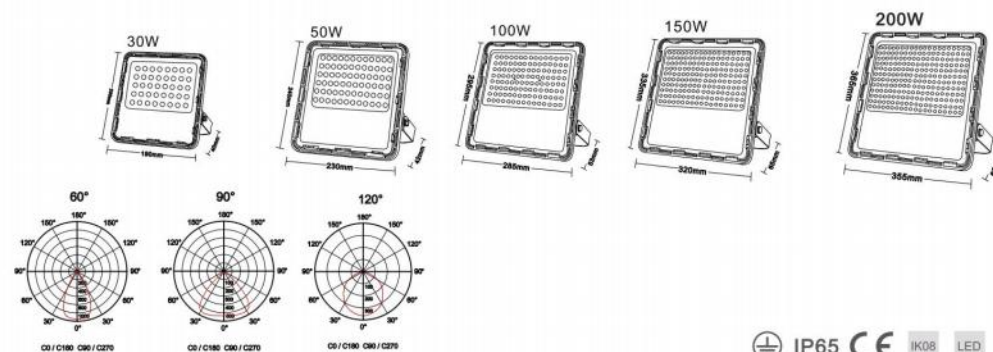


IP65 CE IK08 LED


Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-FL-S044-20W-W-SMD	20W	148*150*30mm	20pcs	SMD 3030	2600lm	AC100-265V	60°/90°/120°	2800-6500K	≥ 70
KH-FL-S044-30W-W-SMD	30W	198*188*40mm	40pcs	SMD 3030	3900lm	AC100-265V	60°/90°/120°	2800-6500K	≥ 70
KH-FL-S044-50W-W-SMD	50W	240*190*42mm	70pcs	SMD 3030	7500lm	AC100-265V	60°/90°/120°	2800-6500K	≥ 70
KH-FL-S044-100W-W-SMD	100W	295*285*53mm	120pcs	SMD 3030	13000lm	AC100-265V	60°/90°/120°	2800-6500K	≥ 70
KH-FL-S044-150W-W-SMD	150W	335*320*65mm	180pcs	SMD 3030	19500lm	AC100-265V	60°/90°/120°	2800-6500K	≥ 70
KH-FL-S044-200W-W-SMD	200W	365*355*65mm	240pcs	SMD 3030	26000lm	AC100-265V	60°/90°/120°	2800-6500K	≥ 70
KH-FL-S044-300W-W-SMD	300W	425*380*50mm	360pcs	SMD 3030	39000lm	AC100-265V	60°/90°/120°	2800-6500K	≥ 70
KH-FL-S044-400W-W-SMD	400W	425*380*50mm	440pcs	SMD 3030	52000lm	AC100-265V	60°/90°/120°	2800-6500K	≥ 70




Model	Power	Size	Light source	Lumen	Voltage	CCT	CRI
KH-FL-S040-20W-W-SMD	20W	135*115*40mm	2835-40PCS	1600-1800lm	AC100-265V	2800-6500K	>75




Model	Power	Size	Light source	Lumen	Voltage	CCT	CRI
KH-FL-S040-30W-W-SMD	30W	165*155*45mm	2835-60PCS	2400-2700lm	AC100-265V	2800-6500K	>75




Model	Power	Size	Light source	Lumen	Voltage	CCT	CRI
KH-FL-S040-50W-W-SMD	50W	230*195*48mm	2835-100PCS	4000-4500lm	AC100-265V	2800-6500K	>75




Model	Power	Size	Light source	Lumen	Voltage	CCT	CRI
KH-FL-S040-100W-W-SMD	100W	285*240*58mm	2835-200PCS	8000-9000lm	AC100-265V	2800-6500K	>75



Model	Power	Size	Light source	Lumen	Voltage	CCT	CRI
KH-FL-S040-150W-W-SMD	150W	345*285*65mm	2835-300PCS	12000-13500lm	AC100-265V	2800-6500K	>75




Model	Power	Size	Light source	Lumen	Voltage	CCT	CRI
KH-FL-S040-200W-W-SMD	200W	425*325*75mm	2835-400PCS	16000-18000lm	AC100-265V	2800-6500K	>75








100W



150W



200W



60°

90°

IP65 CE IK08 LED



Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	Surge protection	CRI
KH-UFO015-100W-B-SMD	100W	Ø270X165MM	160PCS	3030	13000LM	AC85-265V	60°/90°	3000-6500K	LN-PG-6KV L-N:4KV	>70
KH-UFO015-150W-B-SMD	150W	Ø310X170MM	240PCS	3030	19500LM	AC85-265V	60°/90°	3000-6500K	LN-PG-6KV L-N:4KV	>70
KH-UFO015-200W-B-SMD	200W	Ø360X170MM	320PCS	3030	26000LM	AC85-265V	60°/90°	3000-6500K	LN-PG-6KV L-N:4KV	>70



Model	Power	Size	Light source	Lumen	Voltage	CCT	Beam Angle	CRI
KH-UFO004-100W-B-SMD	100W	Ø280*185mm	133pcs-3030	13000lm	AC100-265V	2800-6500K	60°/90°/120°	>80

Model	Power	Size	Light source	Lumen	Voltage	CCT	Beam Angle	CRI
KH-UFO004-150W-B-SMD	150W	Ø340*187mm	210pcs-3030	19500lm	AC100-265V	2800-6500K	60°/90°/120°	>80

Model	Power	Size	Light source	Lumen	Voltage	CCT	Beam Angle	CRI
KH-UFO004-200W-B-SMD	200W	Ø400*196mm	266pcs-3030	26000lm	AC100-265V	2800-6500K	60°/90°/120°	>80

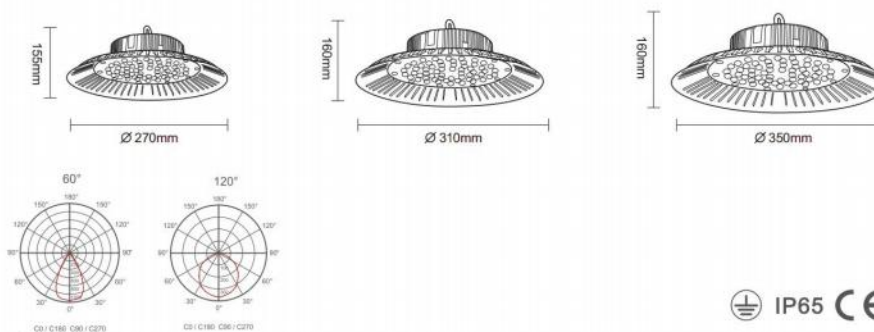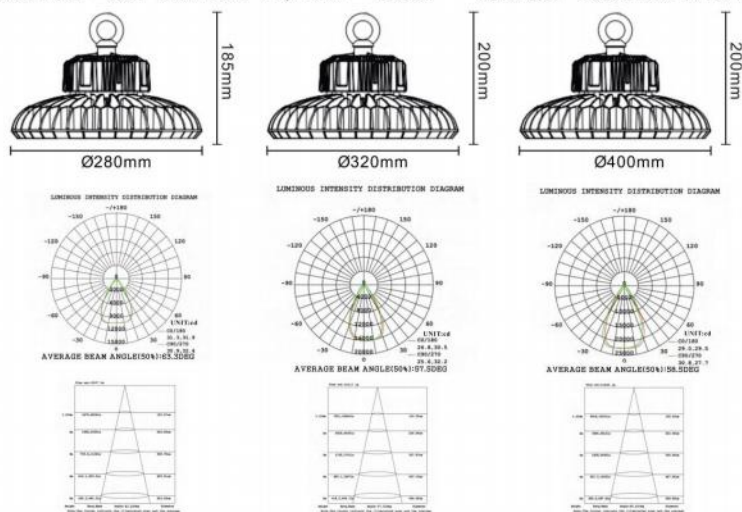


IP65 CE IK08 LED


Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-UFO010-100W-B-SMD	100W	Ø270X155MM	119PCS	3030	13000LM	AC85-265V	60°/120°	3000-6500K	>70
KH-UFO010-150W-B-SMD	150W	Ø310X160MM	175PCS	3030	19500LM	AC85-265V	60°/120°	3000-6500K	>70
KH-UFO010-200W-B-SMD	200W	Ø350X160MM	238PCS	3030	26000LM	AC85-265V	60°/120°	3000-6500K	>70




LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

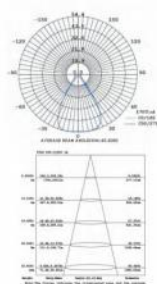


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



IP65 CE LED

Model	Power	Size	Light source	Lumen	Voltage	CCT	Beam Angle	CRI	LN-PG	L-N
KH-UFO012-100W-B-SMD	100W	Φ380*180mm	3030-140PCS	13000lm	AC85-295V	2800-6500K	60°/90°	>80	6KV	4KV
KH-UFO012-150W-B-SMD	150W	Φ420*220mm	3030-196PCS	19500lm	AC85-295V	2800-6500K	60°/90°	>80	6KV	4KV
KH-UFO012-200W-B-SMD	200W	Φ450*230mm	3030-252PCS	26000lm	AC85-295V	2800-6500K	60°/90°	>80	6KV	4KV



IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	Surge protection	CRI
KH-UFO018-100W-B-SMD-LINEAR	100W	330*28mm	116 pcs	2835	13000lm	AC220-265V	60°/90°/120°	3000-6500K	LN-PG:6KV L-N:4KV	>70
KH-UFO018-150W-B-SMD-LINEAR	150W	330*28mm	174 pcs	2835	19500lm	AC220-265V	60°/90°/120°	3000-6500K	LN-PG:6KV L-N:4KV	>70
KH-UFO018-200W-B-SMD-LINEAR	200W	380*28mm	232 pcs	2835	26000lm	AC220-265V	60°/90°/120°	3000-6500K	LN-PG:6KV L-N:4KV	>70
KH-UFO018-100W-B-SMD-DRIVER	100W	330*160mm	150pcs	Philips lumileds 2835	15000lm	AC85-265V	60°/90°/120°	3000-6500K	LN-PG:10KV L-N:5KV	>70
KH-UFO018-150W-B-SMD-DRIVER	150W	330*160mm	250pcs	Philips lumileds 2835	22500lm	AC85-265V	60°/90°/120°	3000-6500K	LN-PG:10KV L-N:5KV	>70
KH-UFO018-200W-B-SMD-DRIVER	200W	380*160mm	330pcs	Philips lumileds 2835	30000lm	AC85-265V	60°/90°/120°	3000-6500K	LN-PG:10KV L-N:5KV	>70
KH-UFO018-100W-B-SMD-DRIVER	100W	330*160mm	168 pcs	Philips lumileds 3030	15000lm	AC85-265V	60°/90°/120°	3000-6500K	LN-PG:6KV L-N:4KV	>70
KH-UFO018-150W-B-SMD-DRIVER	150W	330*160mm	252 pcs	Philips lumileds 3030	22500lm	AC85-265V	60°/90°/120°	3000-6500K	LN-PG:6KV L-N:4KV	>70
KH-UFO018-200W-B-SMD-DRIVER	200W	380*160mm	336pcs	Philips lumileds 3030	30000lm	AC85-265V	60°/90°/120°	3000-6500K	LN-PG:6KV L-N:4KV	>70







IP65 CE LED

Model	Power	Size	Light source	Lumen	Voltage	CCT	Beam Angle	CRI
KH-FL-S038-200W-B-SMD	200W	Φ370*450mm	3030-203PCS	18000lm	AC100-265V	2800-6500K	25°/60°/90°	>80
KH-FL-S038-300W-B-SMD	300W	Φ370*450mm	3030-301PCS	27000lm	AC100-265V	2800-6500K	25°/60°/90°	>80
KH-FL-S038-400W-B-SMD	400W	Φ370*480mm	3030-406PCS	36000lm	AC100-265V	2800-6500K	25°/60°/90°	>80
KH-FL-S038-500W-B-SMD	500W	Φ370*510mm	3030-504PCS	45000lm	AC100-265V	2800-6500K	25°/60°/90°	>80
KH-FL-S038-600W-B-SMD	600W	Φ370*510mm	3030-602PCS	54000lm	AC100-265V	2800-6500K	25°/60°/90°	>80



Installation



IP65 CE LED

Model	Power	Size	Light source	Lumen	Voltage	CCT	Beam Angle	CRI
KH-FL-S028-50W-B-SMD	50W	285*135*90mm	3030-56PCS	6000lm	AC100-265V	3000-6500K	45°/90°/120°	>80
KH-FL-S028-100W-B-SMD	100W	535*135*90mm	3030-112PCS	12000lm	AC100-265V	3000-6500K	45°/90°/120°	>80
KH-FL-S028-150W-B-SMD	150W	795*135*90mm	3030-168PCS	18000lm	AC100-265V	3000-6500K	45°/90°/120°	>80
KH-FL-S028-200W-B-SMD	200W	1060*135*90mm	3030-224PCS	24000lm	AC100-265V	3000-6500K	45°/90°/120°	>80






Model	Power	Size	Light source	Lumen	Voltage	CCT	Beam Angle	CRI
KH-FL-S046-50W-B-SMD	50W	Φ300*282mm	3030-60PCS	5000lm	AC100-265V	2800-6500K	60°/90°	>70

Model	Power	Size	Light source	Lumen	Voltage	CCT	Beam Angle	CRI
KH-FL-S046-100W-B-SMD	100W	Φ410*356mm	3030-120PCS	10000lm	AC100-265V	2800-6500K	60°/90°/120°	>70

Model	Power	Size	Light source	Lumen	Voltage	CCT	Beam Angle	CRI
KH-FL-S046-150W-B-SMD	150W	Φ410*377mm	3030-180PCS	15000lm	AC100-265V	2800-6500K	60°/90°/120°	>70

Model	Power	Size	Light source	Lumen	Voltage	CCT	Beam Angle	CRI
KH-FL-S046-200W-B-SMD	200W	Φ490*441mm	3030-200PCS	20000lm	AC100-265V	2800-6500K	60°/90°/120°	>70

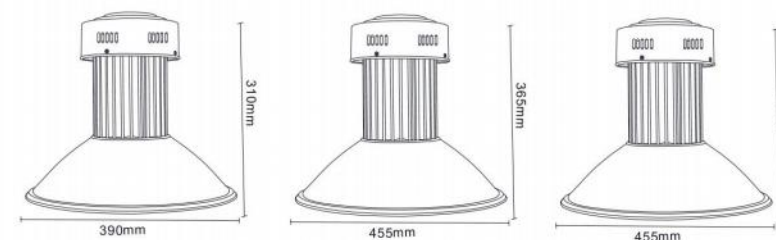



Model	Power	Size	Light source	Lumen	Voltage	CCT	Beam Angle	CRI
KH-FL-S032-50W-S-SMD	50W	Φ390*310mm	3030-50PCS	6000lm	AC100-265V	2800-6500K	45°/90°/120°	>80

Model	Power	Size	Light source	Lumen	Voltage	CCT	Beam Angle	CRI
KH-FL-S032-100W-S-SMD	100W	Φ455*365mm	3030-100PCS	12000lm	AC100-265V	2800-6500K	45°/90°/120°	>80

Model	Power	Size	Light source	Lumen	Voltage	CCT	Beam Angle	CRI
KH-FL-S032-150W-S-SMD	150W	Φ455*415mm	3030-150PCS	18000lm	AC100-265V	2800-6500K	45°/90°/120°	>80



CANOPY LIGHT

MW
MEAN WELL
5 Years
PHILIPS Warranty

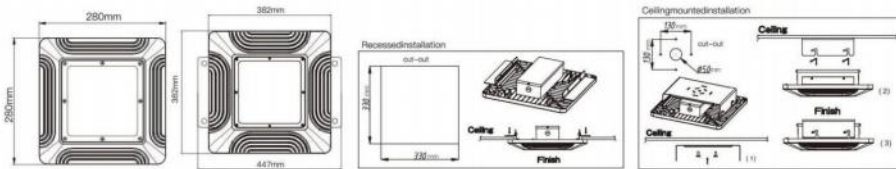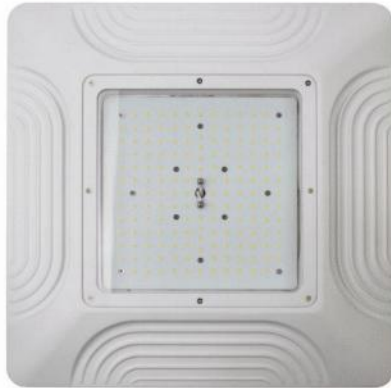


Model	Power	Size	Light source	Lumen	Voltage	CCT	Beam Angle	CRI
KH-FL-S029-80W-W-SMD	80W	280*280*97mm	3030-112PCS	9600lm	AC100-265V	2800-6500K	120°	>80


Model	Power	Size	Light source	Lumen	Voltage	CCT	Beam Angle	CRI
KH-FL-S029-160W-W-SMD	160W	382*382*130mm	3030-224PCS	19200lm	AC100-265V	2800-6500K	120°	>80

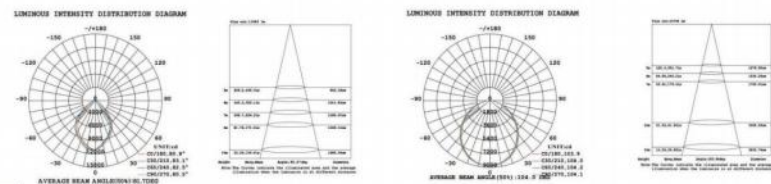


Model	Power	Size	Light source	Lumen	Voltage	CCT	Beam Angle	CRI
KH-FL-S034-100W-W-SMD	100W	L350*W230*H75mm	3030-96PCS	10000lm	AC100-265V	3000-6500K	90°/120°/ 75°/145°/55°/155°	>80



Model	Power	Size	Light source	Lumen	Voltage	CCT	Beam Angle	CRI
KH-FL-S034-150W-W-SMD	150W	L350*W310*H75mm	3030-144PCS	15000lm	AC100-265V	3000-6500K	90°/120°/ 75°/145°/55°/155°	>80



Model	Power	Size	Light source	Lumen	Voltage	CCT	Beam Angle	CRI
KH-FL-S034-200W-W-SMD	200W	L350*W390*H75mm	3030-192PCS	20000lm	AC100-265V	3000-6500K	90°/120°/ 75°/145°/55°/155°	>80



Model	Power	Size	Light source	Lumen	Voltage	CCT	Beam Angle	CRI
KH-FL-S034-250W-W-SMD	250W	L350*W475*H75mm	3030-240PCS	25000lm	AC100-265V	3000-6500K	90°/120°/ 75°/145°/55°/155°	>80




TRI-PROOF TUBE




A.Surface mounting



B.Suspension





IP65 CE LED



DIY C190 C195 C200

Model	Power	Size	Material	SMD Qty	Lumen	IP	Voltage	SPD	CCT
KH-TPU-006-600-10W-W-SMD	10W	600*83*72mm	PC.+ABS	60pcs 2835	1,200LM	65	AC85-265V	2.5KV	2800-6500K
KH-TPU-006-600-20W-W-SMD	20W	600*83*72mm	PC.+ABS	120pcs 2835	2,400LM	65	AC85-265V	2.5KV	2800-6500K
KH-TPU-006-1200-20W-W-SMD	20W	1200*83*72mm	PC.+ABS	120pcs 2835	1,200LM	65	AC85-265V	2.5KV	2800-6500K
KH-TPU-006-1200-40W-W-SMD	40W	1200*83*72mm	PC.+ABS	240pcs 2835	4,800LM	65	AC85-265V	2.5KV	2800-6500K
KH-TPU-006-1500-30W-W-SMD	30W	1500*83*72mm	PC.+ABS	180pcs 2835	3,600LM	65	AC85-265V	2.5KV	2800-6500K
KH-TPU-006-1500-50W-W-SMD	50W	1500*83*72mm	PC.+ABS	360pcs 2835	6,000LM	65	AC85-265V	2.5KV	2800-6500K

Tri-proof tube





IP65 CE LED

Model	Power	Lampholder	Size	Material	Beam Angle	IP	Voltage	SPD	CCT
KH-TPU-006-600-T8*1	T8	G13	660*72*83mm	PC.+ABS	120°	65	AC85-265V	2.5KV	2800-6500K
KH-TPU-006-600-T8*2	T8*2	G13	660*102*83mm	PC.+ABS	120°	65	AC85-265V	2.5KV	2800-6500K
KH-TPU-006-1200-T8*1	T8	G13	1260*72*83mm	PC.+ABS	120°	65	AC85-265V	2.5KV	2800-6500K
KH-TPU-006-1200-T8*2	T8*2	G13	1260*102*83mm	PC.+ABS	120°	65	AC85-265V	2.5KV	2800-6500K
KH-TPU-006-1500-T8*1	T8	G13	1560*72*83mm	PC.+ABS	120°	65	AC85-265V	2.5KV	2800-6500K
KH-TPU-006-1500-T8*2	T8*2	G13	1560*102*83mm	PC.+ABS	120°	65	AC85-265V	2.5KV	2800-6500K

Tri-proof tube


KAYHIN 凯欣
www.kayhin.com

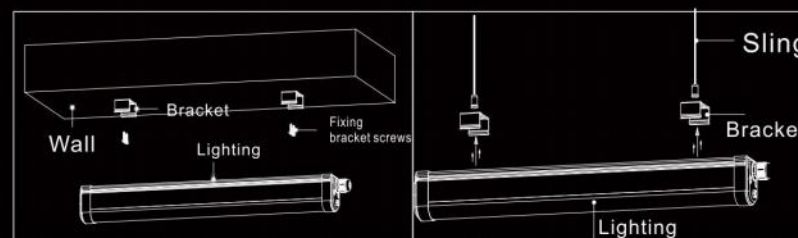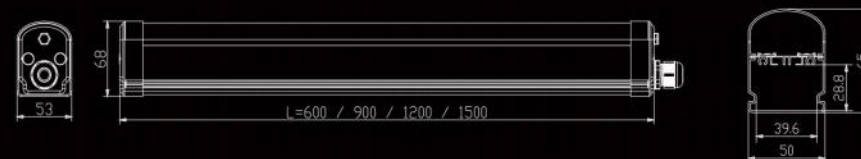

IP65 CE LED

Model	Power	Size	Material	SMD Qty	Lumen	IP	Voltage	SPD	CCT
KH-TPU-005-600-20W-W-SMD	20W	600*53*68mm	Al+PC.+ABS	96pcs 2835	2000LM	65	AC85-265V	2.5KV	2800-6500K
KH-TPU-005-900-30W-W-SMD	30W	900*53*68mm	Al+PC.+ABS	144pcs 2835	3000LM	65	AC85-265V	2.5KV	2800-6500K
KH-TPU-005-1200-40W-W-SMD	40W	1200*53*68mm	Al+PC.+ABS	240pcs 2835	4000LM	65	AC85-265V	2.5KV	2800-6500K
KH-TPU-005-1500-50W-W-SMD	50W	1500*53*68mm	Al+PC.+ABS	288pcs 2835	5000LM	65	AC85-265V	2.5KV	2800-6500K



Tri-proof tube

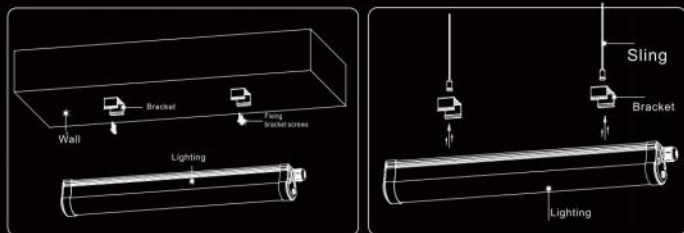

IP65 CE LED

Model	Power	Size	Material	SMD Qty	Lumen	IP	Voltage	SPD	CCT
KH-TPU-004-600-20W-W-SMD	20W	600*74*71mm	Al+PC.+ABS	96pcs 2835	2000LM	65	AC85-265V	2.5KV	2800-6500K
KH-TPU-004-900-30W-W-SMD	30W	900*74*71mm	Al+PC.+ABS	144pcs 2835	3000LM	65	AC85-265V	2.5KV	2800-6500K
KH-TPU-004-1200-40W-W-SMD	40W	1200*74*71mm	Al+PC.+ABS	240pcs 2835	4000LM	65	AC85-265V	2.5KV	2800-6500K
KH-TPU-004-1500-50W-W-SMD	50W	1500*74*71mm	Al+PC.+ABS	288pcs 2835	5000LM	65	AC85-265V	2.5KV	2800-6500K

Tri-proof tube

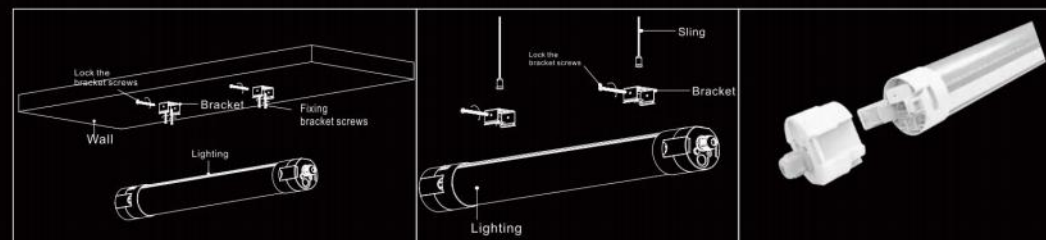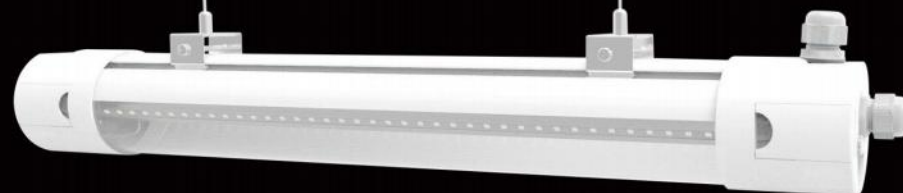


IP65 CE LED

Model	Power	Size	Material	SMD Qty	Lumen	IP	Voltage	SPD	CCT
KH-TPU-003-600-20W-W-SMD	20W	Ø600*79mm	Al+PC.+ABS	144pcs 2835	2400LM	65	AC85-265V	4KV	2800-6500K
KH-TPU-003-900-30W-W-SMD	30W	Ø900*79mm	Al+PC.+ABS	246pcs 2835	3600LM	65	AC85-265V	4KV	2800-6500K
KH-TPU-003-1200-50W-W-SMD	50W	Ø1200*79mm	Al+PC.+ABS	336pcs 2835	6000LM	65	AC85-265V	4KV	2800-6500K
KH-TPU-003-1500-60W-W-SMD	60W	Ø1500*79mm	Al+PC.+ABS	384pcs 2835	7200LM	65	AC85-265V	4KV	2800-6500K


Tri-proof tube

Tri-proof tube

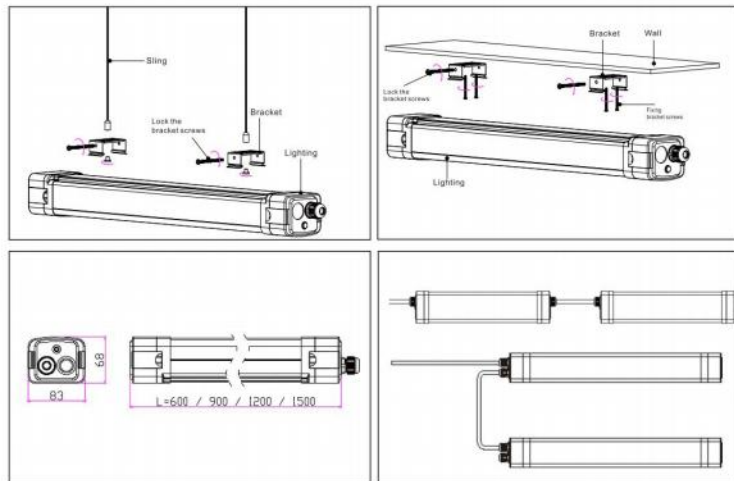

IP65 CE LED

Model	Power	Size	Material	SMD Qty	Lumen	IP	Voltage	SPD	CCT
KH-TPU-002-600-20W-W-SMD	20W	600*83*68mm	Al+PC.+ABS	120pcs 2835	2400LM	65	AC85-265V	4KV	2800-6500K
KH-TPU-002-900-30W-W-SMD	30W	900*83*68mm	Al+PC.+ABS	168pcs 2835	3600LM	65	AC85-265V	4KV	2800-6500K
KH-TPU-002-1200-50W-W-SMD	50W	1200*83*68mm	Al+PC.+ABS	240pcs 2835	6000LM	65	AC85-265V	4KV	2800-6500K
KH-TPU-002-1500-60W-W-SMD	60W	1500*83*68mm	Al+PC.+ABS	288pcs 2835	7200LM	65	AC85-265V	4KV	2800-6500K

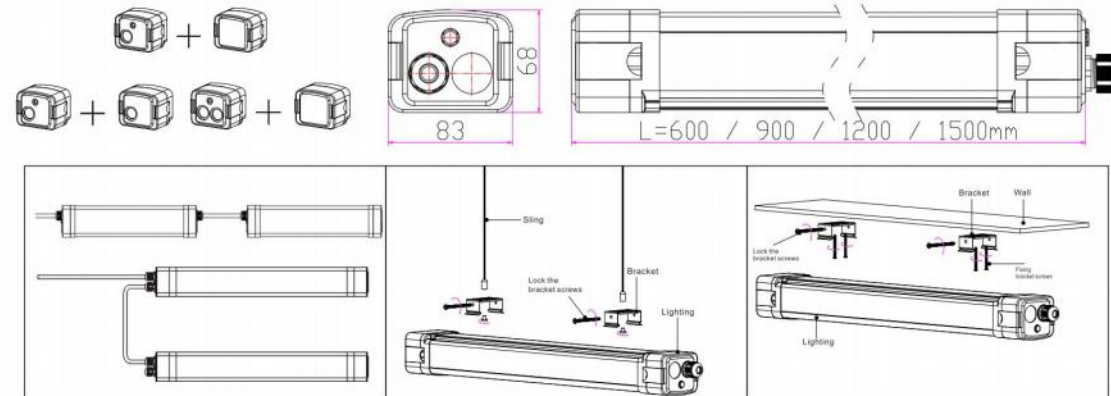

IP65 CE LED

Model	Power	Size	Material	SMD Qty	Lumen	IP	Voltage	SPD	CCT
KH-TPU-001-600-20W-W-SMD	20W	600*83*68mm	Al+PC.+ABS	120pcs 2835	2400LM	65	AC85-265V	4KV	2800-6500K
KH-TPU-001-900-30W-W-SMD	30W	900*83*68mm	Al+PC.+ABS	168pcs 2835	3600LM	65	AC85-265V	4KV	2800-6500K
KH-TPU-001-1200-40W-W-SMD	50W	1200*83*68mm	Al+PC.+ABS	240pcs 2835	6000LM	65	AC85-265V	4KV	2800-6500K
KH-TPU-001-1500-50W-W-SMD	60W	1500*83*68mm	Al+PC.+ABS	288pcs 2835	7200LM	65	AC85-265V	4KV	2800-6500K


LED Bulkhead Light

with micro wave sensor

IP65



micro wave sensor

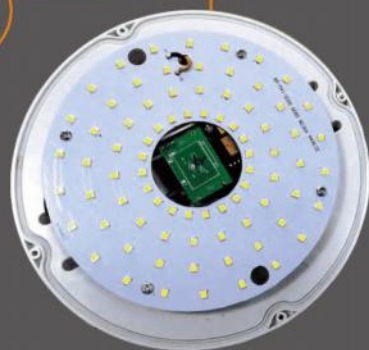

Press the "On/Off" button, the light keeps permanently on or off. Press "Reset" button to get from this mode.
Press "Reset" button, products with DIP switch will be again controlled by DIP switches; otherwise all the setting will be lost which that is 100% detection range hold time 0s, daylight threshold disabled.
Detection AFOS (Press 50%/100% button to define detection area.)
Daylight threshold (press "Up/Down" button to define daylight level.)
Note: Breaks means light will be turned on once sensor detects movement, regardless of the ambient light.
Hold time (Press 5s / 1min / 5min / 10min to define holdtime.)




- *with micro wave sensor*
- *with daylight sensor*
- *micro wave sensor+ remote controller*
- **IP65**



CE RoHS

Model NO	Power	Size	Material	SMD Qty	Lumious flux	IP Rate	Input voltage	CCT
KH-BL-L001-12W-W-SMD-A	12W	198*98*55mm	PC.+PS	80pcs 2835	840-960lm	54	AC100-265V	3000-6500K
KH-BL-L001-15W-W-SMD-A	15W	230*105*55mm	PC.+PS	90pcs 2835	1050-1200lm	54	AC100-265V	3000-6500K
KH-BL-R001-12W-W-SMD-A	12W	Φ175*60mm	PC.+PS	80pcs 2835	840-960lm	54	AC100-265V	3000-6500K
KH-BL-R001-15W-W-SMD-A	15W	Φ210*60mm	PC.+PS	90pcs 2835	1050-1200lm	54	AC100-265V	3000-6500K

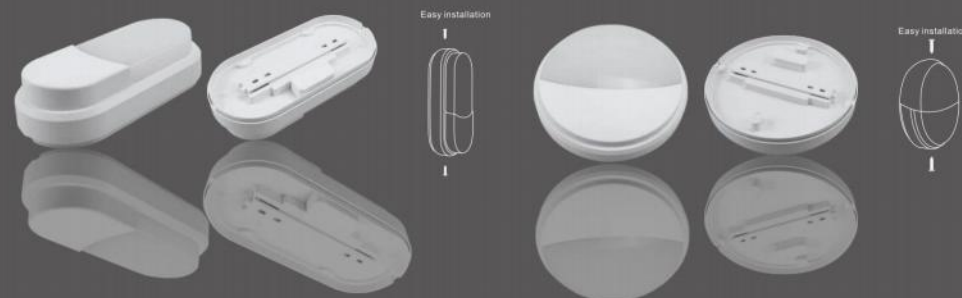


CE RoHS

Model NO	Power	Size	Material	SMD Qty	Lumious flux	IP Rate	Input voltage	CCT
KH-BL-L001-12W-W-SMD-B	12W	198*98*55mm	PC.+PS	80pcs 2835	840-960lm	54	AC100-265V	3000-6500K
KH-BL-L001-15W-W-SMD-B	15W	230*105*55mm	PC.+PS	90pcs 2835	1050-1200lm	54	AC100-265V	3000-6500K
KH-BL-R001-12W-W-SMD-B	12W	Φ175*60mm	PC.+PS	80pcs 2835	840-960lm	54	AC100-265V	3000-6500K
KH-BL-R001-15W-W-SMD-B	15W	Φ210*60mm	PC.+PS	90pcs 2835	1050-1200lm	54	AC100-265V	3000-6500K



LED Bulkhead Light



Model	Power	Size	Material	SMD Qty	Lumen	IP	Voltage	CCT
KH-BL-L002-8W-W-SMD-A	8W	214*112*65mm	ABS. + PS	40pcs 2835	720LM	54	AC175-265V	2800-6500K
KH-BL-L002-12W-W-SMD-A	12W	214*112*65mm	ABS. + PS	60pcs 2835	960LM	54	AC175-265V	2800-6500K
KH-BL-L002-15W-W-SMD-A	15W	270*143*75mm	ABS. + PS	80pcs 2835	1350LM	54	AC175-265V	2800-6500K
KH-BL-L002-20W-W-SMD-A	20W	270*143*75mm	ABS. + PS	100pcs 2835	1800LM	54	AC175-265V	2800-6500K



Model	Power	Size	Material	SMD Qty	Lumen	IP	Voltage	CCT
KH-BL-R002-8W-W-SMD-A	8W	Ø162*65mm	ABS. + PS	40pcs 2835	720LM	54	AC175-265V	2800-6500K
KH-BL-R002-12W-W-SMD-A	12W	Ø162*65mm	ABS. + PS	60pcs 2835	960LM	54	AC175-265V	2800-6500K
KH-BL-R002-15W-W-SMD-A	15W	Ø218*70mm	ABS. + PS	80pcs 2835	1350LM	54	AC175-265V	2800-6500K
KH-BL-R002-20W-W-SMD-A	20W	Ø218*70mm	ABS. + PS	100pcs 2835	1800LM	54	AC175-265V	2800-6500K

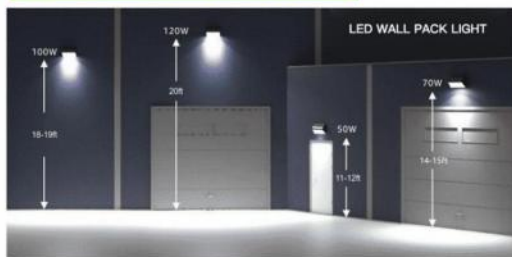


IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-WP-S001-60W-B-SMD	60W	336*216*182mm	78PCS	SMD 3030	7800LM	AC85-265V	120°	3000-6500K	>70
KH-WP-S001-100W-B-SMD	100W	385*247*195mm	98PCS	SMD 3030	13000LM	AC85-265V	120°	3000-6500K	>70
KH-WP-S001-120W-B-SMD	120W	385*247*195mm	126PCS	SMD 3030	15600LM	AC85-265V	120°	3000-6500K	>70





High Conversion Solar Panels



IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-SOL-SL001-50W-B-SMD	50W	500*210mm	116pcs	SMD 3030	5000lm	12V	120°	2800-6500K	≥70
KH-SOL-SL001-100W-B-SMD	100W	500*210mm	271pcs	SMD 3030	10000lm	12V	120°	2800-6500K	≥70
KH-SOL-SL001-200W-B-SMD	200W	500*210mm	317pcs	SMD 3030	20000lm	12V	120°	2800-6500K	≥70
KH-SOL-SL001-300W-B-SMD	300W	500*210mm	417pcs	SMD 3030	30000lm	12V	120°	2800-6500K	≥70



Large Capacity Lithium Battery
Charging Time Only 4-6 Hours
working Time 10-12 Hours

IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-SOL-SL002-60W-B-SMD	60W	520*210mm	60pcs	SMD 3030	6000lm	12V	150°75°	2800-6500K	≥70
KH-SOL-SL002-100W-B-SMD	100W	520*210mm	100pcs	SMD 3030	10000lm	12V	150°75°	2800-6500K	≥70
KH-SOL-SL002-180W-B-SMD	180W	680*270mm	180pcs	SMD 3030	18000lm	12V	150°75°	2800-6500K	≥70




IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-SOL-SL003-60W-G-SMD	60W	520*280mm	60pcs	SMD 3030	6000lm	12V	150°75°	2800-6500K	≥70
KH-SOL-SL003-100W-G-SMD	100W	520*280mm	100pcs	SMD 3030	10000lm	12V	150°75°	2800-6500K	≥70
KH-SOL-SL003-180W-G-SMD	180W	555*280mm	180pcs	SMD 3030	18000lm	12V	150°75°	2800-6500K	≥70



PRODUCT ADVANTAGES >>>>

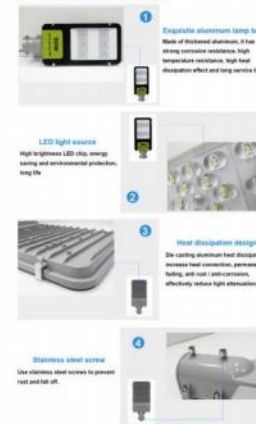

IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-SOL-SL004-30W-B-SMD	30W	385*142mm	36pcs	SMD 3030	3000lm	12V	150°75°	2800-6500K	≥70
KH-SOL-SL004-50W-B-SMD	50W	500*210mm	72pcs	SMD 3030	5000lm	12V	150°75°	2800-6500K	≥70
KH-SOL-SL004-100W-B-SMD	100W	500*250mm	108pcs	SMD 3030	10000lm	12V	150°75°	2800-6500K	≥70



3030 LED LIGHT CHIP

Long working hours, high brightness



Large capacity lithium battery

Good light should be equipped with good battery. Large capacity. Long life.



IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-SOL-SL005-60W-B-SMD	60W	520*280mm	180 pcs	SMD 3030	6000lm	12V	120°	2800-6500K	≥70
KH-SOL-SL005-100W-B-SMD	100W	630*270mm	324pcs	SMD 3030	10000lm	12V	120°	2800-6500K	≥70
KH-SOL-SL005-180W-B-SMD	180W	750*290mm	486pcs	SMD 3030	18000lm	12V	120°	2800-6500K	≥70



Large Capacity Lithium Battery

Charging Time Only 4-6 Hours
Working Time 10-12 Hours

PRODUCT STRUCTURE

It is shown in the picture

Model	Power	Size	Chip qty	Chip size	Solar panel	Lumen	Batteries	Beam Angle	CCT	CRI
KH-SOL-SL006-35W	35W	857*355*50mm	60	3030	18V 50W	5250lm	LiFePO4 12.8V 15AH	145x70°	2600-6500K	≥70
KH-SOL-SL006-45W	45W	1207*355*50mm	90	3030	18V 70W	6750lm	LiFePO4 12.8V 20AH	145x70°	2600-6500K	≥70
KH-SOL-SL006-50W	50W	1077*524*50mm	120	3030	18V 90W	7500lm	LiFePO4 12.8V 25AH	145x70°	2600-6500K	≥70
KH-SOL-SL006-60W	60W	1327*524*50mm	150	3030	18V 120W	9000lm	LiFePO4 12.8V 30AH	145x70°	2600-6500K	≥70

IP65 CE IK08 LED



Solar Tube



IP65 CE IK08 LED

Model	Real power	Size	Chip qty	Chip size	Lumen	Batterie	Solar panel	Beam Angle	CCT	CRI	Working time
KH-SOL-TU-60W	60W	857*355*50mm	60pcs	SMD 3030	6000lm	LiFePO4 3V 6AH	polysilicon	120°	2800-6500K	≥70	2 raining day
KH-SOL-TU-90W	90W	600*355*50mm	60pcs	SMD 3030	9000lm	LiFePO4 3V 6AH	polysilicon	120°	2800-6500K	≥70	2 raining day
KH-SOL-TU-120W	120W	900*290*50mm	60pcs	SMD 3030	12000lm	LiFePO4 3V 6AH	polysilicon	120°	2800-6500K	≥70	2 raining day



All in One Design polycrystalline Solar Panel with high photoelectric conversion efficiency

Large Capacity Lithium Battery
Charging Time Only 4-6 Hours
Working Time 10-12 Hours


IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-SOL-FL001-60W-W-SMD	60W	190*170mm	60pcs	2835	6000lm	12V	60°	2800-6500K	≥70
KH-SOL-FL001-100W-W-SMD	100W	235*180mm	100pcs	2835	10000lm	12V	60°	2800-6500K	≥70
KH-SOL-FL001-150W-W-SMD	150W	235*290mm	150pcs	2835	15000lm	12V	60°	2800-6500K	≥70
KH-SOL-FL001-200W-W-SMD	200W	363*260mm	200pcs	2835	20000lm	12V	60°	2800-6500K	≥70





IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-SOL-FL002-25W-B-SMD	25W	190*145mm	56pcs	3030	2500lm	12V	120°	2800-6500K	≥70
KH-SOL-FL002-40W-B-SMD	40W	255*210mm	90pcs	3030	4000lm	12V	120°	2800-6500K	≥70
KH-SOL-FL002-60W-B-SMD	60W	255*210mm	120pcs	3030	6000lm	12V	120°	2800-6500K	≥70
KH-SOL-FL002-100W-B-SMD	100W	255*210mm	224pcs	3030	10000lm	12V	120°	2800-6500K	≥70
KH-SOL-FL002-200W-B-SMD	200W	255*210mm	400pcs	3030	20000lm	12V	120°	2800-6500K	≥70



IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-SOL-FL003-20W-B-SMD	20W	180*158mm	78pcs	3030	2000lm	12V	120°	2800-6500K	≥70
KH-SOL-FL003-30W-B-SMD	30W	230*195mm	110pcs	3030	3000lm	12V	120°	2800-6500K	≥70
KH-SOL-FL003-50W-B-SMD	50W	260*230mm	160pcs	3030	5000lm	12V	120°	2800-6500K	≥70
KH-SOL-FL003-100W-B-SMD	100W	325*280mm	252pcs	3030	10000lm	12V	120°	2800-6500K	≥70
KH-SOL-FL003-200W-B-SMD	200W	370*330mm	396pcs	3030	20000lm	12V	120°	2800-6500K	≥70



IP65 CE IK08 LED


Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-SOL-FL004-100W-B-SMD	100W	175*210*55mm	103pcs	3030	10000lm	12V	120°	2800-6500K	≥70
KH-SOL-FL004-150W-B-SMD	150W	204*255*55mm	187pcs	3030	15000lm	12V	120°	2800-6500K	≥70
KH-SOL-FL004-240W-B-SMD	240W	256*310*55mm	355pcs	3030	24000lm	12V	120°	2800-6500K	≥70



INTELLIGENT LIGHT CONTROL FUNCTION
5-12 HOURS FAST CHARGING CAN ALSO LIGHT UP IN RAINY WEATHER
HOME SOLAR LIGHTING



Power display



Charging indicator



IP65 CE IK08 LED

Model	Power	Size	Chip qty	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-SOL-FL005-40W	40W	190*145mm	128pcs	3030	4000lm	12V	120°	2800-6500K	≥70
KH-SOL-FL005-60W	60W	240*180mm	200pcs	3030	6000lm	12V	120°	2800-6500K	≥70
KH-SOL-FL005-100W	100W	260*200mm	308pcs	3030	10000lm	12V	120°	2800-6500K	≥70
KH-SOL-FL005-200W	200W	255*210mm	432pcs	3030	20000lm	12V	120°	2800-6500K	≥70
KH-SOL-FL005-300W	300W	360*290mm	644pcs	3030	30000lm	12V	120°	2800-6500K	≥70