



INDOOR LIGHTING



淇軒电器有限公司

电话: +86-760-22120818
传真: +86-760-22137118
邮箱: manager@kayhin.com
网站: www.kayhin.com
地址: 广东省中山市小榄镇泰弘南路2号茂业科技园F栋

Kayhin Electric Appliance Co., Ltd.
Tel: +86-760-22120818
Fax: +86-760-22137118
E-mail: manager@kayhin.com
Website: www.kayhin.com
Address: Wenquan industry park, No. 2 Mincheng xi Road,
baofeng Xidian Town, Zhongshan City, Guangdong, China



COMPANY PROFILE

Kayhin Electric Appliance co., Ltd was established in 2000, and located in Zhongshan City of China. We are a LED professional manufacturer and exporter, our main concern is the design, quality and develement of the products, all of our items are complied with international quality standard, and our brand is known more and more by customers from all of the world.

We have our own professional engineering department, they are responsible for the products development and quality testing. Therefore our products quality and safety are guaranteed, and you can use low price to get much more better quality products, choose to work with us, will bring you more opportunity to expand your business, we are THE ONE you are looking for !!



For all of our products, we could make specifica size, types and colors according to your needs, you can send us your details and we will prepare the quotation and then send to you for reference.

AGING TEST AREA



WORKSHOP



SMD WORKSHOP



BSCI An initiative of the Foreign Trade Association (FTA)
Business Social Compliance Initiative

BSCI NO.: 354685






TRACK LIGHT



CRI>80

Model	Power	Size	Material	Beam Angle	Lumen	IP	Voltage	CCT
KH-TRL-R001-10W-B-COB	10W	Ø50XL128mm	Alum	24°36°	1000LM	20	AC100-265V	2800-6500K
KH-TRL-R001-20W-B-COB	20W	Ø60XL145mm	Alum	24°36°	2000LM	20	AC100-265V	2800-6500K
KH-TRL-R001-30W-B-COB	30W	Ø70XL155mm	Alum	24°36°	3000LM	20	AC100-265V	2800-6500K
KH-TRL-R001-40W-B-COB	40W	Ø80XL175mm	Alum	24°36°	4000LM	20	AC100-265V	2800-6500K

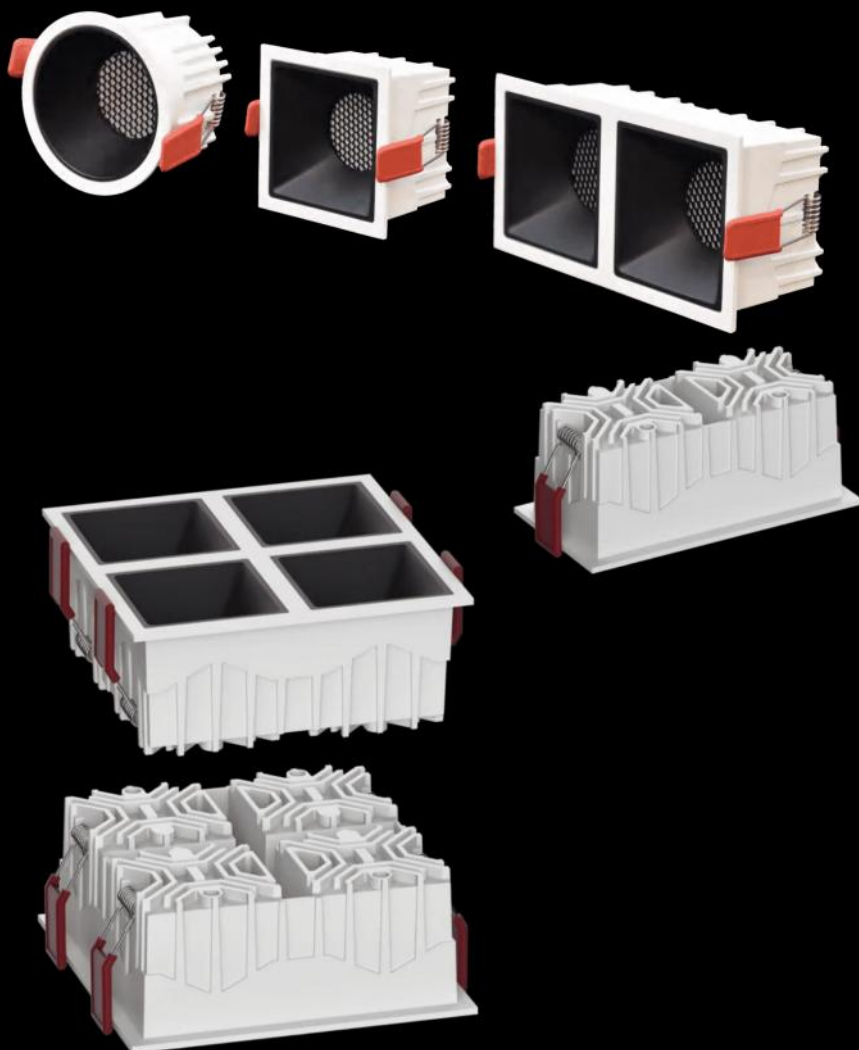

CRI>80

Model	Power	Size	OpenSize	Material	Beam Angle	Lumen	IP	Voltage	CCT
KH-DL-R105-7W-W-COB	7W	Ø65*H53mm	Ø55mm	Alum+lens	10°/23°/36°	630LM	20	AC100-265V	2800-6500K
KH-DL-R105-12W-W-COB	12W	Ø85*H62mm	Ø75mm	Alum+lens	10°/23°/36°	1080LM	20	AC100-265V	2800-6500K
KH-DL-R105-18W-W-COB	18W	Ø105*H77mm	Ø95mm	Alum+lens	10°/23°/36°	1620LM	20	AC100-265V	2800-6500K
KH-DL-S105-7W-W-COB	7W	65*65*53mm	55*55mm	Alum+lens	10°/23°/36°	630LM	20	AC100-265V	2800-6500K
KH-DL-S105-2*7W-W-COB	14W	126*65*53mm	115*55mm	Alum+lens	10°/23°/36°	1260LM	20	AC100-265V	2800-6500K
KH-DL-S105-3*7W-W-COB	21W	182*65*53mm	175*55mm	Alum+lens	10°/23°/36°	1890LM	20	AC100-265V	2800-6500K
KH-DL-S105-4*7W-W-COB	28W	126*126*53mm	115*115mm	Alum+lens	10°/23°/36°	2520LM	20	AC100-265V	2800-6500K
KH-DL-S105-12W-W-COB	12W	85*85*62mm	75*75mm	Alum+lens	10°/23°/36°	1080LM	20	AC100-265V	2800-6500K
KH-DL-S105-2*12W-W-COB	24W	185*85*62mm	175*75mm	Alum+lens	10°/23°/36°	2160LM	20	AC100-265V	2800-6500K
KH-DL-S105-3*12W-W-COB	36W	252*85*62mm	240*75mm	Alum+lens	10°/23°/36°	3240LM	20	AC100-265V	2800-6500K
KH-DL-S105-4*12W-W-COB	48W	185*185*62mm	175*175mm	Alum+lens	10°/23°/36°	4320LM	20	AC100-265V	2800-6500K
KH-DL-S105-18W-W-COB	18W	105*105*77mm	95*95mm	Alum+lens	10°/23°/36°	1620LM	20	AC100-265V	2800-6500K
KH-DL-S105-2*18W-W-COB	36W	205*105*77mm	195*95mm	Alum+lens	10°/23°/36°	3240LM	20	AC100-265V	2800-6500K

DL-104


Embedded Installation



CRI>80

Model	Power	Size	OpenSize	Material	BEAMANGLE	Lumen	IP	Voltage	CCT
KH-DL-R104-10W-COB-TLS	10W	Ø90*50mm	Ø75mm	Alum	15°24°36°	1000LM	20	AC100-265V	2800-6500K

Recessed Installation

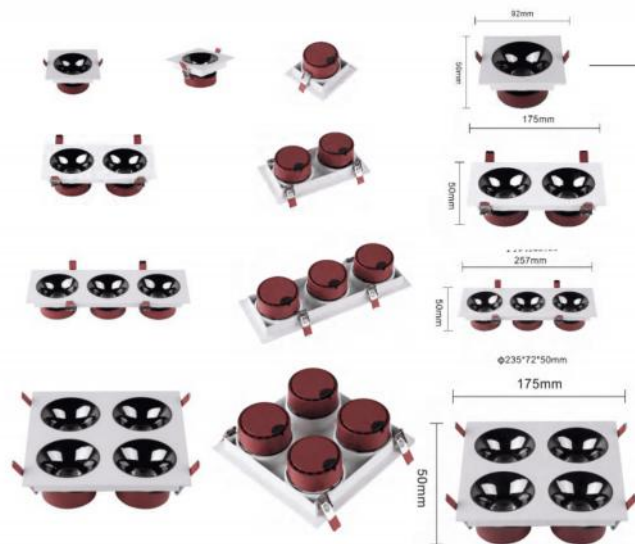

Φ154*154*50mm

CRI>80

Model	Power	Size	OpenSize	Material	BEAMANGLE	Lumen	IP	Voltage	CCT
KH-DL-S104-10W-COB	10W	92*92*50mm	75x75mm	Alum	15°24°36°	1000LM	20	AC100-265V	2800-6500K
KH-DL-S104-20W-COB	20W	175*95*90mm	155x75mm	Alum	15°24°36°	2000LM	20	AC100-265V	2800-6500K
KH-DL-S104-30W-COB	30W	257*92*50mm	235x75mm	Alum	15°24°36°	3000LM	20	AC100-265V	2800-6500K
KH-DL-S104-40W-COB	40W	175*175*50mm	155x155mm	Alum	15°24°36°	4000LM	20	AC100-265V	2800-6500K

LED DOWN LIGHT


Recessed Installation



CRI>80

Model	Power	Size	OpenSize	Material	BEAMANGLE	Lumen	IP	Voltage	CCT
KH-DL-R104-10W-COB	10W	Ø82*50mm	Ø75mm	Alum	15°24°36°	1000LM	20	AC100-265V	2800-6500K

Surface Installation

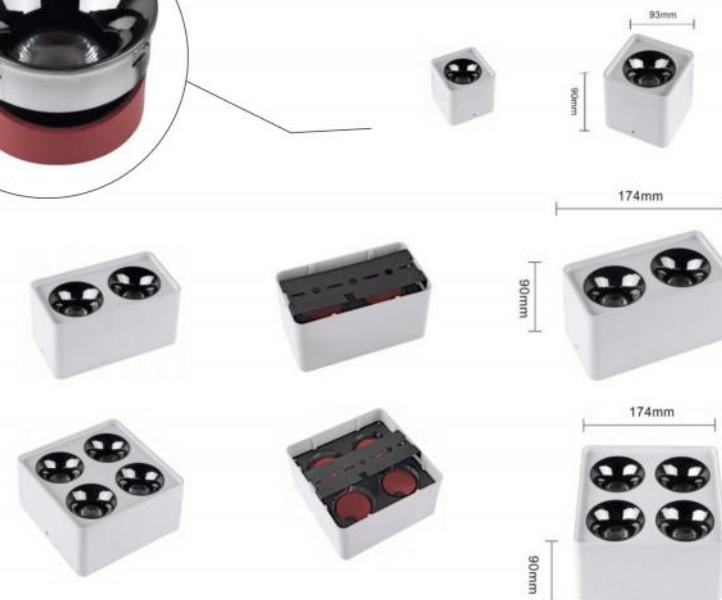

CRI>80

Model	Power	Size	Material	BEAMANGLE	Lumen	IP	Voltage	CCT
KH-DL-S104-10W-COB-SF	10W	93*93*90mm	Alum	15°24°36°	1000LM	20	AC100-265V	2800-6500K
KH-DL-S104-20W-COB-SF	20W	174*94*90mm	Alum	15°24°36°	2000LM	20	AC100-265V	2800-6500K
KH-DL-S104-30W-COB-SF	30W	256*94*90mm	Alum	15°24°36°	3000LM	20	AC100-265V	2800-6500K
KH-DL-S104-40W-COB-SF	40W	174*174*90mm	Alum	15°24°36°	4000LM	20	AC100-265V	2800-6500K



007



LED DOWN LIGHT


DL-R103



CRI>80

Model	Power	Size	OpenSize	Material	Beam Angle	Lumen	IP	Voltage	CCT
KH-DL-R103-7W-W-SMD	7W	Ø83*50mm	Ø75mm	Alum+lens	120°	560LM	20	AC100-265V	2800-6500K
KH-DL-R103-12W-W-SMD	12W	Ø104*63mm	Ø95mm	Alum+lens	120°	960LM	20	AC100-265V	2800-6500K
KH-DL-R103-18W-W-SMD	18W	Ø123*74mm	Ø115mm	Alum+lens	120°	1260LM	20	AC100-265V	2800-6500K

008

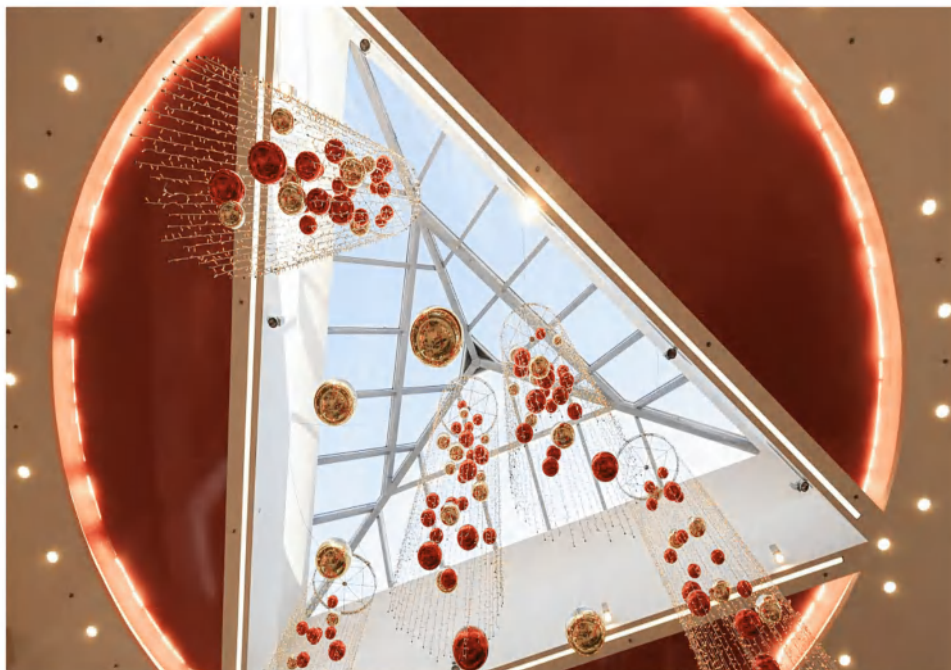

009

KAYHIN
www.kayhin.com



CRI>80

Model	Power	Size	Cut Out	Material	Beam Angle	Lumen	IP	Voltage	CCT
KH-DL-R102-7W-W-COB	7W	Ø90*50mm	Ø70mm	Alum+PC	120°	560LM	20	AC100-265V	2800-6500K
KH-DL-R102-10W-W-COB	10W	Ø105*53mm	Ø85mm	Alum+PC	120°	900LM	20	AC100-265V	2800-6500K
KH-DL-R102-15W-W-COB	15W	Ø120*62mm	Ø100mm	Alum+PC	120°	1350LM	20	AC100-265V	2800-6500K
KH-DL-R102-20W-W-COB	20W	Ø160*74mm	Ø140mm	Alum+PC	120°	1800LM	20	AC100-265V	2800-6500K
KH-DL-R102-30W-W-COB	30W	Ø190*84mm	Ø160mm	Alum+PC	120°	2700LM	20	AC100-265V	2800-6500K
KH-DL-R102-40W-W-COB	40W	Ø200*96mm	Ø180mm	Alum+PC	120°	3600LM	20	AC100-265V	2800-6500K

0010



LED DOWN LIGHT



DL-R101



CRI>80

Model	Power	Size	OpenSize	Material	▲	Lumen	IP	Voltage	CCT
KH-DL-R101-7W-W-COB	7W	Ø62*82mm	Ø55mm	Alum	15°24°36°	560LM	20	AC100-265V	2800-6500K
KH-DL-R101-10W-W-COB	10W	Ø85*95mm	Ø75mm	Alum	15°24°36°	900LM	20	AC100-265V	2800-6500K
KH-DL-R101-20W-W-COB	20W	Ø105*118mm	Ø95mm	Alum	15°24°36°	1800LM	20	AC100-265V	2800-6500K
KH-DL-S101-7W-W-COB	7W	62*62*82mm	Ø55mm	Alum	15°24°36°	560LM	20	AC100-265V	2800-6500K
KH-DL-S101-10W-W-COB	10W	85*85*95mm	Ø75mm	Alum	15°24°36°	900LM	20	AC100-265V	2800-6500K
KH-DL-S101-20W-W-COB	20W	105*105*118mm	Ø95mm	Alum	15°24°36°	1800LM	20	AC100-265V	2800-6500K
KH-DL-R101-7W-W-COB-TLS	7W	100*62*82mm	Ø55mm	Alum	15°24°36°	560LM	20	AC100-265V	2800-6500K
KH-DL-R101-10W-W-COB-TLS	10W	120*73*95mm	Ø75mm	Alum	15°24°36°	900LM	20	AC100-265V	2800-6500K
KH-DL-R101-20W-W-COB-TLS	20W	145*95*118mm	Ø95mm	Alum	15°24°36°	1800LM	20	AC100-265V	2800-6500K
KH-DL-R101-20W-W-COB-DB	20W	195*97*95mm	185*85mm	Alum	15°24°36°	1800LM	20	AC100-265V	2800-6500K
KH-DL-S101-20W-W-COB-DB	20W	195*97*95mm	185*85mm	Alum	15°24°36°	1800LM	20	AC100-265V	2800-6500K
KH-DL-S101-40W-W-COB-4H	40W	190*190*103mm	185*85mm	Alum	15°24°36°	3600LM	20	AC100-265V	2800-6500K
KH-DL-S101-40W-W-COB-4HTLS	40W	182*243*103mm	185*85mm	Alum	15°24°36°	3600LM	20	AC100-265V	2800-6500K



013



LED DOWN LIGHT

DL-R100



Model	Power	Size	OpenSize	Material	Beam Angle	Lumen	IP	Voltage	CRI>80
									CCT
KH-DL-R100-5W-W-SD	5W	65*70mm	55mm	Alum	24°	400LM	20	AC100-265V	2800-6500K
KH-DL-R100-10W-W-SD	10W	85*75mm	75mm	Alum	24°	900LM	20	AC100-265V	2800-6500K
KH-DL-R100-15W-W-SD	15W	105*100mm	95mm	Alum	24°	1350LM	20	AC100-265V	2800-6500K

014

DL-R098



CRI>80									
Model	Power	Size	OpenSize	Material		Lumen	IP	Voltage	CCT
KH-DL-R098-7W-W-SD	7W	82*45mm	75mm	Alum+lens	24°	560LM	20	AC100-265V	2800-6500K

LED DOWN LIGHT

DL-R099




CRI>80									
Model	Power	Size	OpenSize	Material		Lumen	IP	Voltage	CCT
KH-DL-R099-12W-W-SD	12W	110*65mm	95mm	Alum+lens	24°	1080LM	20	AC100-265V	2800-6500K



017

LED DOWN LIGHT

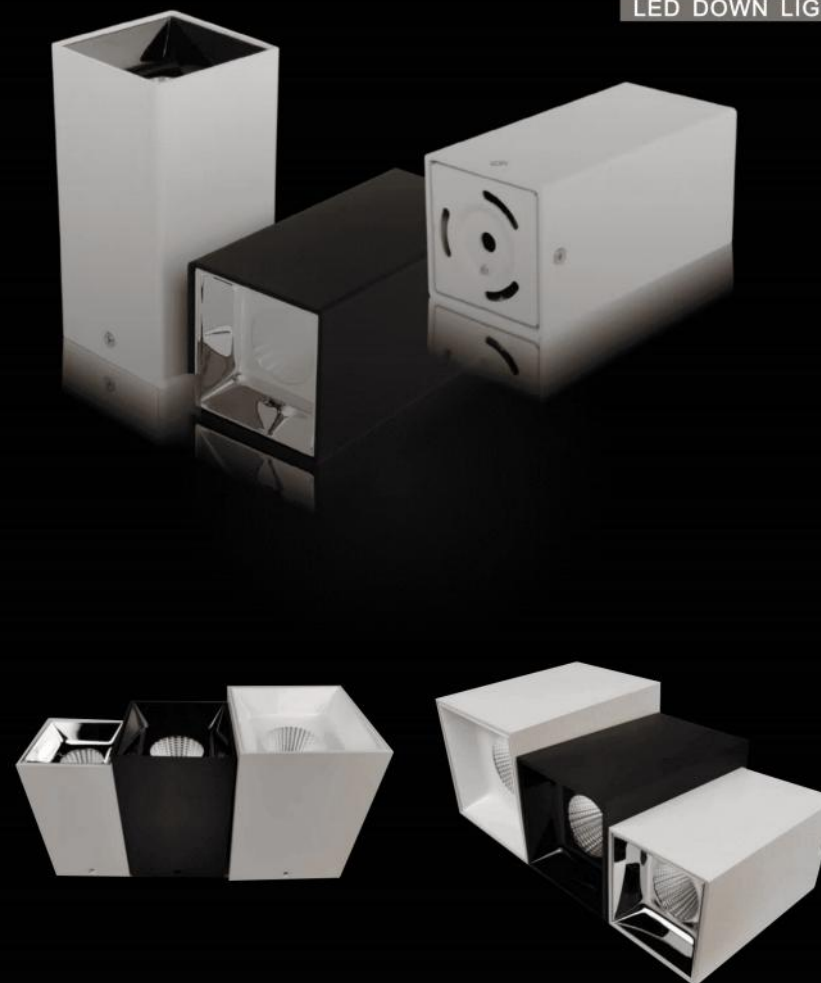

Model	Power	Size	Material		Lumen	IP	Voltage	CCT
KH-DL-S097-15W-W-SMD	15W	76*76*150mm	Alum+lens	15°30°45°	1500LM	20	AC100-265V	2800-6500K
KH-DL-S097-20W-W-SMD	20W	96*96*150mm	Alum+lens	15°30°45°	2000LM	20	AC100-265V	2800-6500K
KH-DL-S097-30W-W-SMD	30W	116*116*150mm	Alum+lens	15°30°45°	3000LM	20	AC100-265V	2800-6500K

018

DOWN LIGHT R096




Model	Power	Size	Material	Beam Angle	Lumen	IP	Voltage	CCT
KH-DL-R096-15W-W-SMD	15W	Ø76*150mm	Alum+lens	45°	1500LM	20	AC100-265V	2800-6500K
KH-DL-R096-20W-W-SMD	20W	Ø96*150mm	Alum+lens	45°	2000LM	20	AC100-265V	2800-6500K
KH-DL-R096-30W-W-SMD	30W	Ø116*150mm	Alum+lens	45°	3000LM	20	AC100-265V	2800-6500K

LED DOWN LIGHT



Model	Power	Size	Material	Beam Angle	Lumen	IP	Voltage	CCT
KH-DL-R096-40W-W-SMD	40W	Ø142*150mm	Alum+lens	45°	4000LM	20	AC100-265V	2800-6500K
KH-DL-R096-50W-W-SMD	50W	Ø171*150mm	Alum+lens	45°	5000LM	20	AC100-265V	2800-6500K

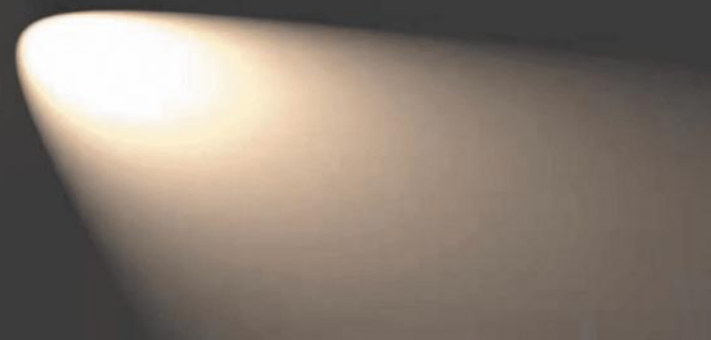

DOWN LIGHT R095




Model	Power	Size	Cut out	Material		Lumen	IP	Voltage	CCT
KH-DL-R095-10W-W-SMD	10W	Ø85*50mm	Ø75mm	Alum+lens	15°24°38°	1000LM	20	AC100-265V	2800-6500K
KH-DL-R095-20W-W-SMD	20W	Ø104*108mm	Ø95mm	Alum+lens	15°24°38°	2000LM	20	AC100-265V	2800-6500K
KH-DL-R095-30W-W-SMD	30W	Ø132*127mm	Ø125mm	Alum+lens	15°24°38°	3000LM	20	AC100-265V	2800-6500K



DOWN LIGHT R094

LED DOWN LIGHT

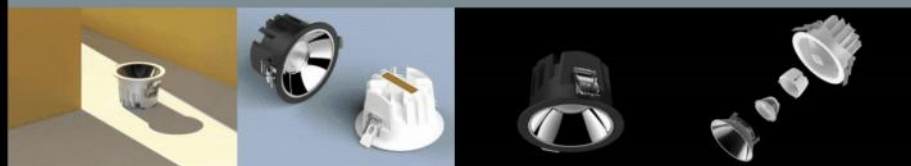

Model	Power	Size	Cut out	Material	☀	Lumen	IP	Voltage	CCT
KH-DL-R094-10W-W-SMD	10W	Ø86*55mm	Ø75mm	Alum+lens	50°	1000LM	20	AC100-265V	2800-6500K
KH-DL-R094-20W-W-SMD	20W	Ø101*60mm	Ø90mm	Alum+lens	24°38°55°	2000LM	20	AC100-265V	2800-6500K
KH-DL-R094-30W-W-SMD	30W	Ø140*73mm	Ø125mm	Alum+lens	24°38°55°	3000LM	20	AC100-265V	2800-6500K
KH-DL-R094-40W-W-SMD	40W	Ø180*94mm	Ø165mm	Alum+lens	24°38°55°	4000LM	20	AC100-265V	2800-6500K
KH-DL-R094-50W-W-SMD	50W	Ø214*110mm	Ø200mm	Alum+lens	24°38°55°	5000LM	20	AC100-265V	2800-6500K

Deep anti-dazzle
UGR<19



RoHS CE LED

Model	Power	Size	Cut out Size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-DL-R092-7W-B-SD	7W	Ø 90*45mm	75mm	630lm	AC100-265V	60°	2700K-6500K	>80
KH-DL-R092-10W-B-SD	10W	Ø 105*65mm	90mm	900lm	AC100-265V	60°	2700K-6500K	>80
KH-DL-R092-15W-B-SD	15W	Ø 130*68mm	115mm	1350lm	AC100-265V	60°	2700K-6500K	>80
KH-DL-R092-20W-B-SD	20W	Ø 165*90mm	150mm	1800lm	AC100-265V	60°	2700K-6500K	>80
KH-DL-R092-30W-B-SD	30W	Ø 185*95mm	170mm	2700lm	AC100-265V	60°	2700K-6500K	>80



IP65



RoHS CE LED

Model	Power	Size	Cut out Size	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-DL-R089-7W-W-WP	7W	Ø 90*67mm	Ø 75mm	SMD 2835	560lm	AC100-265V	120°	2800-6500K	≥80
KH-DL-R089-12W-W-WP	12W	Ø 108*72mm	Ø 90mm	SMD 2835	960lm	AC100-265V	120°	2800-6500K	≥80
KH-DL-R089-15W-W-WP	15W	Ø 140*72mm	Ø 120mm	SMD 2835	1200lm	AC100-265V	120°	2800-6500K	≥80
KH-DL-R089-24W-W-WP	24W	Ø 190*70mm	Ø 170mm	SMD 2835	1920lm	AC100-265V	120°	2800-6500K	≥80
KH-DL-R089-30W-W-WP	30W	Ø 240*70mm	Ø 220mm	SMD 2835	2400lm	AC100-265V	120°	2800-6500K	≥80



ceiling light

R001




S001



Model	Power	Size	Material	Beam Angle	Lumen	IP	Voltage	CCT
KH-CL-R001-3W-W-COB	3W	Ø60*17mm	Alum	24°	180LM	20	AC220-265V	2800-6500K
KH-CL-R001-5W-W-COB	5W	Ø75*20mm	Alum	24°	350LM	20	AC220-265V	2800-6500K
KH-CL-R001-7W-W-COB	7W	Ø85*20mm	Alum	24°	560LM	20	AC220-265V	2800-6500K
KH-CL-R001-10W-W-COB	10W	Ø105*20mm	Alum	24°	800LM	20	AC220-265V	2800-6500K
KH-CL-R001-15W-W-COB	15W	Ø125*20mm	Alum	24°	1200LM	20	AC220-265V	2800-6500K
KH-CL-S001-5W-W-COB	5W	75*75*20mm	Alum	24°	350LM	20	AC220-265V	2800-6500K

LED PANEL LIGHT

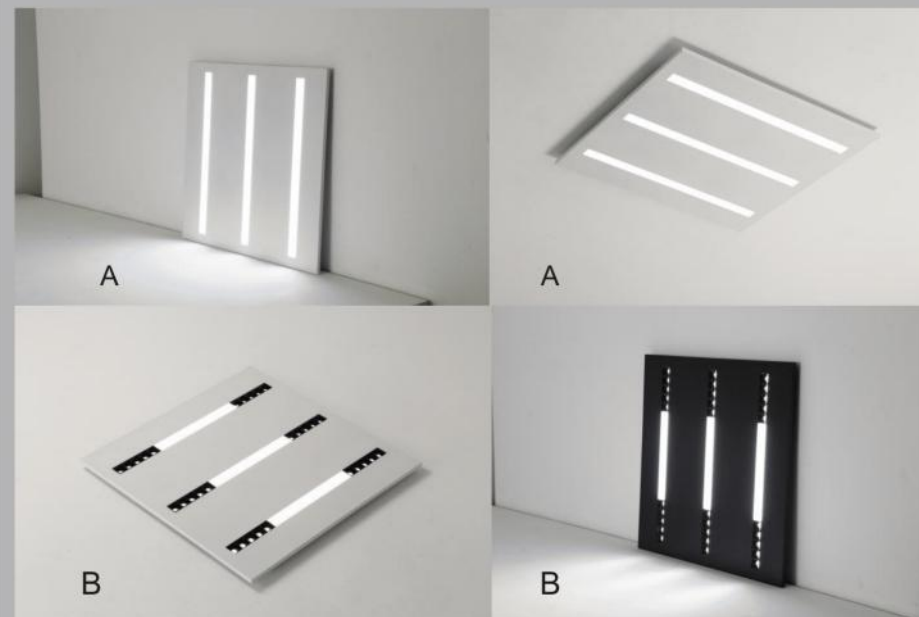

A

Model	Power	Size	Material	▲	Lumen	IP	Voltage	CRI>80 CCT
KH-PL-S060-48W-A	48W	595*595*25mm 603*603*25mm	Alum+PC	120°	5760LM	20	AC100-265V	2800-6500K
KH-PL-S060-60W-A	60W	595*595*25mm 603*603*25mm	Alum+PC	120°	7200LM	20	AC100-265V	2800-6500K
KH-PL-S060-96W-A	96W	595*595*25mm 603*603*25mm	Alum+PC	120°	11520LM	20	AC100-265V	2800-6500K
KH-PL-S060-120W-A	120W	595*595*25mm 603*603*25mm	Alum+PC	120°	14400LM	20	AC100-265V	2800-6500K
KH-PL-S060-40W-A-TRI	40W	595*595*25mm 603*603*25mm	Alum+PC	120°	5760LM	20	AC165-265V	3CCT 3000K 4000K 6500K. First light one 3000K 40W . Second light on 6500K 40W Third light on 4000K 40W


B

Model	Power	Size	Material	▲	Lumen	IP	Voltage	CRI>80 CCT
KH-PL-S060-48W-B	48W	595*595*25mm 603*603*25mm	Alum+PC	24°/36°	5760LM	20	AC100-265V	2800-6500K
KH-PL-S060-60W-B	60W	595*595*25mm 603*603*25mm	Alum+PC	24°/36°	7200LM	20	AC100-265V	2800-6500K
KH-PL-S060-96W-B	96W	595*595*25mm 603*603*25mm	Alum+PC	24°/36°	11520LM	20	AC100-265V	2800-6500K
KH-PL-S060-120W-B	120W	595*595*25mm 603*603*25mm	Alum+PC	24°/36°	14400LM	20	AC100-265V	2800-6500K
KH-PL-S060-40W-A-TRI	40W	595*595*25mm 603*603*25mm	Alum+PC	24°/36°	5760LM	20	AC165-265V	Switch tri-color control, First grill light on, Second middle light on, The third all light on



031

LED PANEL LIGHT

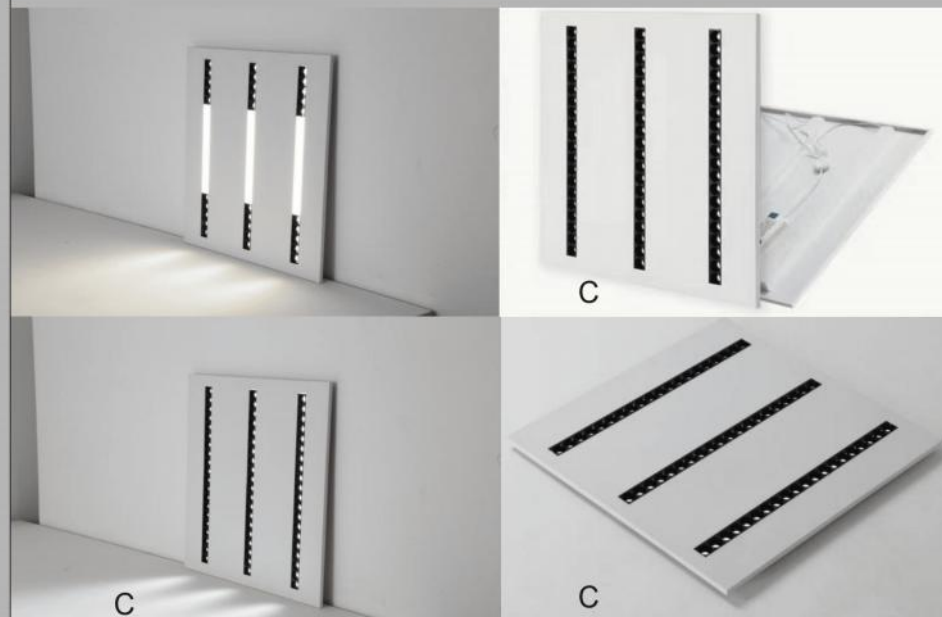

C

CRI>80

Model	Power	Size	Material	△	Lumen	IP	Voltage	CCT
KH-PL-S060-48W-C	48W	595*595*25mm 603*603*25mm	Alum+PC	24°/36°	5760LM	20	AC100-265V	2800-6500K
KH-PL-S060-60W-C	60W	595*595*25mm 603*603*25mm	Alum+PC	24°/36°	7200LM	20	AC100-265V	2800-6500K
KH-PL-S060-96W-C	96W	595*595*25mm 603*603*25mm	Alum+PC	24°/36°	11520LM	20	AC100-265V	2800-6500K
KH-PL-S060-120W-C	120W	595*595*25mm 603*603*25mm	Alum+PC	24°/36°	14400LM	20	AC100-265V	2800-6500K
KH-PL-S060-40W-C-TRI	40W	595*595*25mm 603*603*25mm	Alum+PC	24°/36°	5760LM	20	AC165-265V	3CCT 3000K 4000K 6500K. First light one 3000K 40W. Second light on 6500K 40W Third light on 4000K 40W

032



淇轩电器有限公司

电话: +86-760-22120918
传真: +86-760-22137118
邮箱: manager@kayhin.com
网站: www.kayhin.com
地址: 广东省中山市小榄镇泰弘南路2号茂权科技园附楼



Kayhin Electric Appliance Co., Ltd.

Tel: +86-760-22120918
Fax: +86-760-22137118
E-mail: manager@kayhin.com
Website: www.kayhin.com
Address: Wenguan industry park, No.2 Mincheng xi Road,
baofeng Xiaolan Town, Zhongshan City, Guangdong China.




033



034

MATRIX

S093

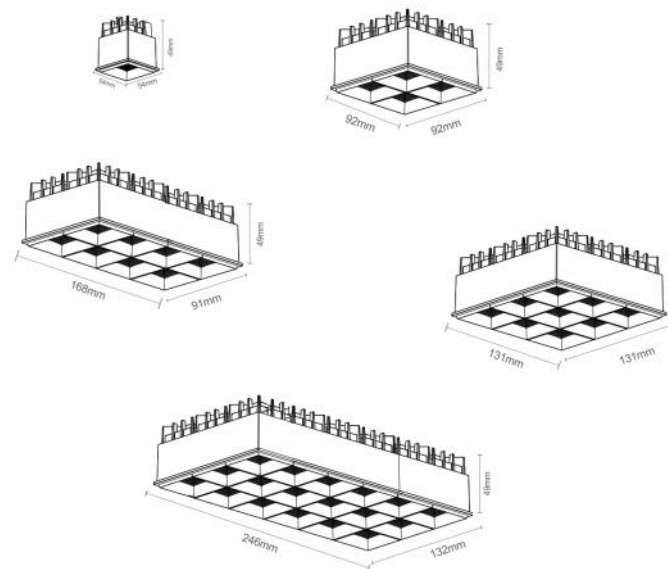

RoHS CE LED

Model	Power	Size	Cut out Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
KH-DL-S093-2W-B-SD	2W	54*54*49mm	45*45mm	1PC 3030	180lm	AC100-265V	15°/24°/38°/50°/50°/70°/70°/35°/70°/ellipse/asymmetric	3000-6500K	>80
KH-DL-S093-8W-B-SD	8W	92*92*49mm	82*82mm	4PCS 3030	720lm	AC100-265V	15°/24°/38°/50°/50°/70°/70°/35°/70°/ellipse/asymmetric	3000-6500K	>80
KH-DL-S093-16W-B-SD	16W	168*91*49mm	157*82mm	8PCS 3030	1440lm	AC100-265V	15°/24°/38°/50°/50°/70°/70°/35°/70°/ellipse/asymmetric	3000-6500K	>80
KH-DL-S093-18W-B-SD	18W	131*131*49mm	119*119mm	9PCS 3030	1620lm	AC100-265V	15°/24°/38°/50°/50°/70°/70°/35°/70°/ellipse/asymmetric	3000-6500K	>80
KH-DL-S093-36W-B-SD	36W	246*132*49mm	234*120mm	18PCS 3030	3240lm	AC100-265V	15°/24°/38°/50°/50°/70°/70°/35°/70°/ellipse/asymmetric	3000-6500K	>80







037

038

LINEAR SHAPE

L093

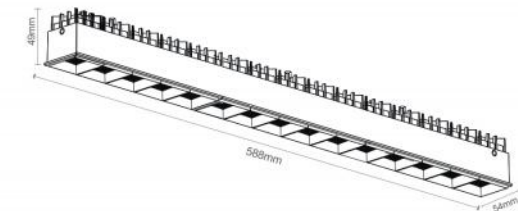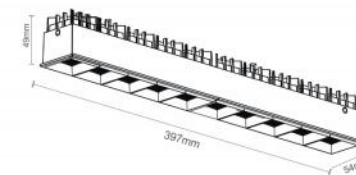

RoHS LED

Model	Power	Size	Cut out Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
KH-DL-L093-6W-B-SD	6W	131*54*49mm	120*45mm	3PCS 3030	540lm	AC100-265V	15°/24°/38°/50°/50°/70°/70°/35°/70°/ellipse/asymmetric	3000-6500K	>80
KH-DL-S093-10W-B-SD	10W	207*54*49mm	195*45mm	5PCS 3030	900lm	AC100-265V	15°/24°/38°/50°/50°/70°/70°/35°/70°/ellipse/asymmetric	3000-6500K	>80
KH-DL-S093-20W-B-SD	20W	397*54*49mm	388*45mm	10PCS 3030	1800lm	AC100-265V	15°/24°/38°/50°/50°/70°/70°/35°/70°/ellipse/asymmetric	3000-6500K	>80
KH-DL-S093-30W-B-SD	30W	588*54*49mm	577*45mm	15PCS 3030	2700lm	AC100-265V	15°/24°/38°/50°/50°/70°/70°/35°/70°/ellipse/asymmetric	3000-6500K	>80




ceiling
recessed / fixed / trim



ceiling / wall
surface

DOWN LIGHTS

Suitable for external installation on a ceiling, on both recessed or surface mounted solution. Available in multiple sizes, shapes and beam optics, from narrow to very wide, to meet the most restrictive project requirements.

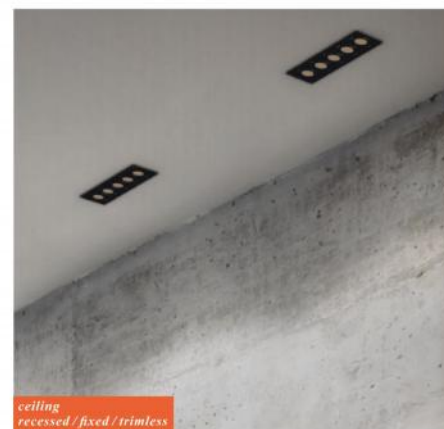

ceiling
recessed / fixed / trimless



ceiling
recessed / adjustable / trim

WALL WASHER

Different shapes and sizes, to give complete lighting solutions for illumination of residential, hospitality and decorative.



DOWN LIGHTS

L088 series surface mounting





5spots



10spots



15spots



RoHS CE LED

Model	Power	Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
KH-DL-L088-10W-B-SD-SURFACE	10W	136*50*45mm	5PCS 3030	800lm	AC100-265V	15°/30°/45°	3000-6500K	>80
KH-DL-L088-20W-B-SD-SURFACE	20W	269*50*45mm	10PCS 3030	1600lm	AC100-265V	15°/30°/45°	3000-6500K	>80
KH-DL-L088-30W-B-SD-SURFACE	30W	402*50*45mm	15PCS 3030	2400lm	AC100V-265V	15°/30°/45°	3000-6500K	>80



Light Source Can Be 180° Adjustment

Maximum Support 180° Rotation, Adjust the Irradiation Angle at Any Time




Folding Lamp Series

- Multiple sizes available
- High color rendering Ra>90



COLOR TEMPERATURE



RoHS CE LED

Model	Power	Size	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-DL-S088-10W-B-SD-ADJ	10W	137*105*35mm	SMD 3030	800lm	AC100-265V	15°/30°/45°	2800-6500K	≥80
KH-DL-S088-20W-B-SD-ADJ	20W	272*105*35mm	SMD 3030	1600lm	AC100-265V	15°/30°/45°	2800-6500K	≥80

L088 series
recessed / adjustable / trim



ADJUSTABLE

1spot



2spots



5spots



10spots



15spots



RoHS CE LED

Model	Power	Size	Cut out Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
KH-DL-L088-2W-W-SD-adjustable	2W	45*43*45mm	35*35mm	1PC 3030	160lm	AC100-265V	15°/30°/45°	3000-6500K	>80
KH-DL-L088-4W-W-SD-adjustable	4W	75*43*45mm	65*35mm	2PCS 3030	320lm	AC100-265V	15°/30°/45°	3000-6500K	>80
KH-DL-L088-10W-W-SD-adjustable	10W	150*50*45mm	140*38mm	5PCS 3030	800lm	AC100-265V	15°/30°/45°	3000-6500K	>80
KH-DL-L088-20W-W-SD-adjustable	20W	280*50*45mm	275*38mm	10PCS 3030	1600lm	AC100-265V	15°/30°/45°	3000-6500K	>80
KH-DL-L088-30W-W-SD-adjustable	30W	415*50*45mm	405*38mm	15PCS 3030	2400lm	AC100-265V	15°/30°/45°	3000-6500K	>80


045

L088 series
recessed / adjustable / trim


**ADJUSTABLE
DOUBLE**






5spots x2



10spots x2



15spots x2

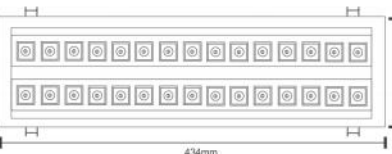

RoHS CE LED

Model	Power	Size	Cut out Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
KH-DL-L088-10*2W-W-SD-DA	20W	168*159*45mm	160*143mm	10PCS 3030	1600lm	AC100-265V	15°/30°/45°	3000-6500K	>80
KH-DL-L088-20*2W-W-SD-DA	40W	302*159*45mm	290*143mm	20PCS 3030	3200lm	AC100-265V	15°/30°/45°	3000-6500K	>80
KH-DL-L088-30*2W-W-SD-DA	60W	434*159*45mm	420*143mm	30PCS 3030	4800lm	AC100-265V	15°/30°/45°	3000-6500K	>80

046



047

L088 series
recessed / adjustable / trimless



INVISIBLE




RoHS **CE** **LED**

Model	Power	Size	Cut out Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
KH-DL-L088-10W-W-SD-Trimless	10W	150*50*45mm	140*38mm	5PCS 3030	800lm	AC100-265V	15°/30°/45°	3000-6500K	>80
KH-DL-L088-20W-W-SD-Trimless	20W	280*50*45mm	275*38mm	10PCS 3030	1600lm	AC100-265V	15°/30°/45°	3000-6500K	>80
KH-DL-L088-30W-W-SD-Trimless	30W	415*50*45mm	405*38mm	15PCS 3030	2400lm	AC100-265V	15°/30°/45°	3000-6500K	>80

048

FIXED ADJUSTABLE SURFACE

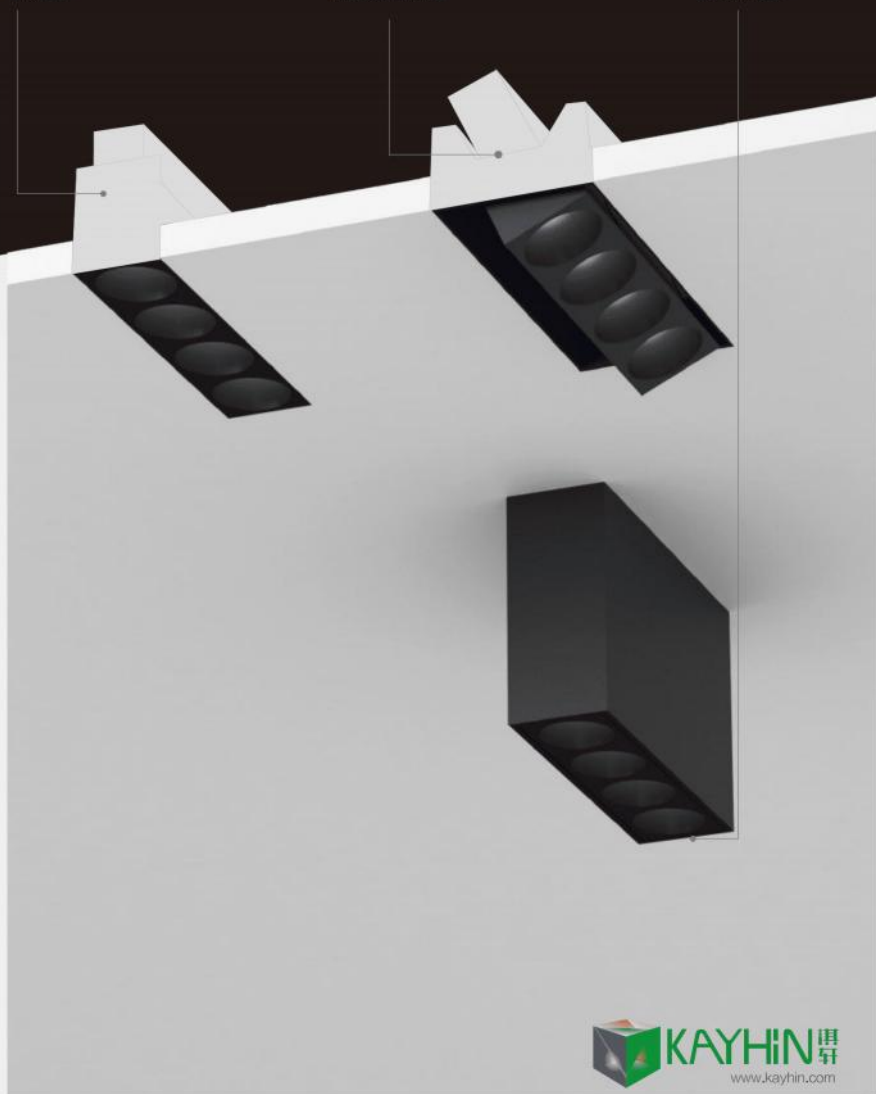

recessed / fixed / trim
L088 series



1spot



2spots




5spots



10spots



15spots

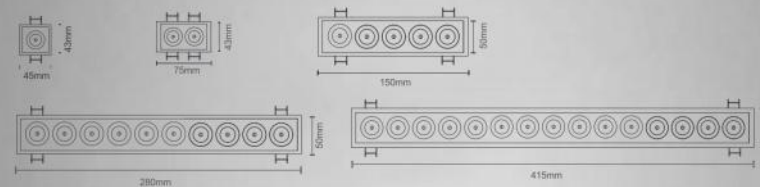

RoHS  

Model	Power	Size	Cut out Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
KH-DL-L088-2W-W-SD	2W	45*43*45mm	35*35mm	1PC 3030	160lm	AC100-265V	15°/30°/45°	3000-6500K	>80
KH-DL-L088-4W-W-SD	4W	75*43*45mm	65*35mm	2PCS 3030	320lm	AC100-265V	15°/30°/45°	3000-6500K	>80
KH-DL-L088-10W-W-SD	10W	150*50*45mm	140*38mm	5PCS 3030	800lm	AC100V-265V	15°/30°/45°	3000-6500K	>80
KH-DL-L088-20W-W-SD	20W	280*50*45mm	275*38mm	10PCS 3030	1600lm	AC100V-265V	15°/30°/45°	3000-6500K	>80
KH-DL-L088-30W-W-SD	30W	415*50*45mm	405*38mm	15PCS 3030	2400lm	AC100V-265V	15°/30°/45°	3000-6500K	>80

WALL WASHER

Changing perceptions and opening new application opportunities where detail matters.



051



**WALL
WASHER**

L090



10W



10W x2



10W x3





10W



10W x2




10W x3



RoHS CE LED

Model	Power	Size	Cut out Size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-DL-L090-10W-W-SD	10W	150*50*45mm	140*38mm	800lm	AC100-265V	15°/30°/45°	3000-6500K	>80
KH-DL-L090-20W-W-SD	20W	280*50*45mm	275*38mm	1600lm	AC100-265V	15°/30°/45°	3000-6500K	>80
KH-DL-L090-30W-W-SD	30W	415*50*45mm	405*38mm	2400lm	AC100V-265V	15°/30°/45°	3000-6500K	>80

052

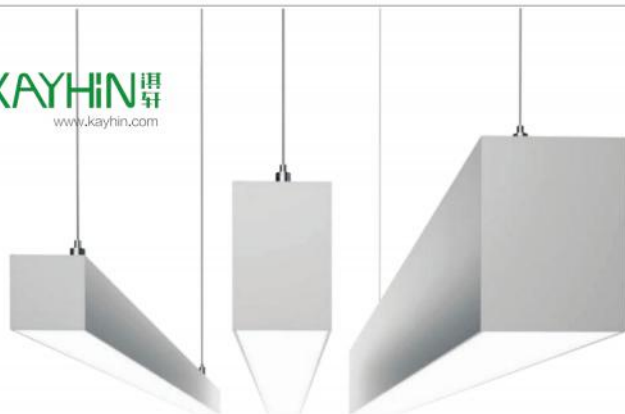

L3370


■ L3370



LED LINEAR LIGHT
MODULAR PROFILE LIGHTING SYSTEMS



053

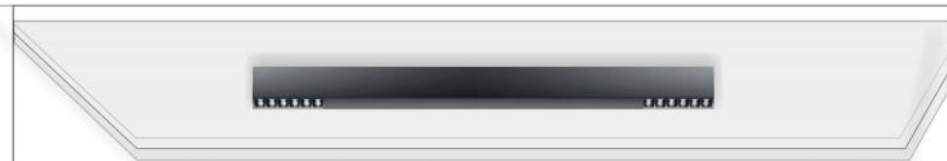


30W/black




40W A version/black



40W B version/black



Suspended



Ceiling



Wall



RoHS CE LED

Model	Power	Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
KH-LL-L3370-40W-B-SD-A	40W	1200*33*70mm	40PCS 3030	4500lm	AC100-277V	15°/30°/45°	3000-6500K	>80
KH-LL-L3370-30W-B-SD	30W	1200*33*70mm	15PCS 3030	3000lm	AC100-277V	15°/30°/45°	3000-6500K	>80
KH-LL-L3370-40W-B-SD-B	40W	1200*33*70mm	40PCS 3030	4500lm	AC100-277V	15°/30°/45°	3000-6500K	>80

054



055



056

● FRAMELESS



Free Opening Design

Free opening design eliminates the need for specific opening sizes for easy installation



Adjustable Max



Adjustable Min



RoHS  

Model	Power	Size	Cut out Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
KH-PL-R048-9W-W-SD	9W	Ø90x25mm	70mm	45pcs 2835	900lm	AC100-265V	120°	2700K-6500K	>80
KH-PL-R048-18W-W-SD	18W	Ø120x25mm	100mm	90pcs 2835	1800lm	AC100-265V	120°	2700K-6500K	>80
KH-PL-R048-24W-W-SD	24W	Ø120x25mm	150mm	144 pcs 2835	2400lm	AC100-265V	120°	2700K-6500K	>80
KH-PL-R048-36W-W-SD	36W	Ø120x25mm	200mm	252pcs 2835	3600lm	AC100-265V	120°	2700K-6500K	>80
KH-PL-S048-9W-W-SD	9W	90°90°25mm	70mm	45pcs 2835	900lm	AC100-265V	120°	2700K-6500K	>80
KH-PL-S048-18W-W-SD	18W	120°120°25mm	100mm	90pcs 2835	1800lm	AC100-265V	120°	2700K-6500K	>80
KH-PL-S048-24W-W-SD	24W	170°170°25mm	150mm	144 pcs 2835	2400lm	AC100-265V	120°	2700K-6500K	>80
KH-PL-S048-36W-W-SD	36W	225°225°25mm	200mm	252pcs 2835	3600lm	AC100-265V	120°	2700K-6500K	>80

● Surface



RoHS  


Model	Power	Size	Cut out Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
KH-PL-R048-18W-W-S	18W	Ø120°35mm	/	90pcs 2835	1800lm	AC100-265V	120°	2700K-6500K	>80
KH-PL-R048-24W-W-S	24W	Ø170°35mm	/	144pcs 2835	2400lm	AC100-265V	120°	2700K-6500K	>80
KH-PL-R048-36W-W-S	36W	Ø225°35mm	/	252pcs 2835	3600lm	AC100-265V	120°	2700K-6500K	>80
KH-PL-S048-18W-W-S	18W	120°120°35mm	/	90pcs 2835	1800lm	AC100-265V	120°	2700K-6500K	>80
KH-PL-S048-24W-W-S	24W	170°170°35mm	/	144pcs 2835	2400lm	AC100-265V	120°	2700K-6500K	>80
KH-PL-S048-36W-W-S	36W	225°225°35mm	/	252pcs 2835	3600lm	AC100-265V	120°	2700K-6500K	>80



deeply anti glare
slim panel light
UGR<16

RoHS CE LED

Model	Power	Size	Cut out Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
KH-PL-R049-6W-W-SD	6W	Ø90x30mm	75mm	30pcs 2835	540lm	AC100-265V	120°	2700K-6500K	>80
KH-PL-R049-10W-W-SD	10W	Ø120x30mm	100mm	50pcs 2835	900lm	AC100-265V	120°	2700K-6500K	>80
KH-PL-R049-15W-W-SD	15W	Ø170x30mm	155mm	75pcs 2835	1350lm	AC100-265V	120°	2700K-6500K	>80
KH-PL-R049-22W-W-SD	22W	Ø220x30mm	200mm	110pcs 2835	1980lm	AC100-265V	120°	2700K-6500K	>80

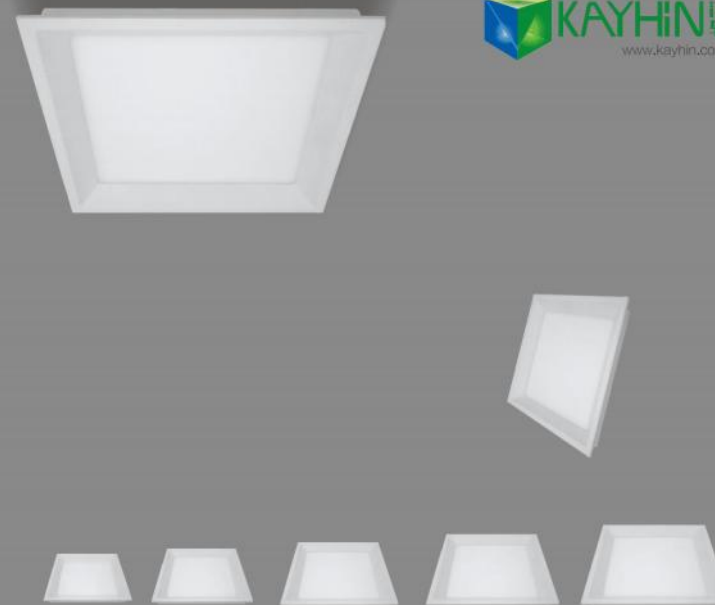

RoHS CE LED

Model	Power	Size	Cut out Size	Chip qty	Lumen	Voltage	Beam Angle	CCT	CRI
KH-PL-S049-6W-W-SD	6W	90°90°30mm	75°75mm	30pcs 2835	540lm	AC100-265V	120°	2700K-6500K	>80
KH-PL-S049-10W-W-SD	10W	120°120°30mm	100°100mm	50pcs 2835	900lm	AC100-265V	120°	2700K-6500K	>80
KH-PL-S049-15W-W-SD	15W	170°170°30mm	155°155mm	75pcs 2835	1350lm	AC100-265V	120°	2700K-6500K	>80
KH-PL-S049-22W-W-SD	22W	220°220°30mm	200°200mm	110pcs 2835	1980lm	AC100-265V	120°	2700K-6500K	>80



deeply anti glare
slim panel light
UGR<16



ANTI DAZZLE DOWNLIGHT

- Anti-dazzle
- Anti-glare
- Anti-reflection
- Anti-dust
- Anti-bug

PP MATERIAL MASK

- High quality material
- High light transmittance
- High light efficiency
- High light output

LED PANEL

- 2000 high quality LED chips
- High light output
- High light efficiency
- High light output

ALUMINUM BACK COVER

- High quality aluminum
- High light transmittance
- High light efficiency
- High light output


**3 Color Temperatures
Meet various needs**

WARM WHITE
NATURAL WHITE
COOL WHITE




RoHS CE LED

Model	Power	Size	Cut out Size	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-PL-R052-7W-W-SD	7W	Ø90x40mm	Ø75mm	SMD 2835	700lm	AC100-240V	120°	2800-6500K	≥80
KH-PL-R052-12W-W-SD	12W	Ø120*40mm	Ø100mm	SMD 2835	1200lm	AC100-240V	120°	2800-6500K	≥80
KH-PL-R052-18W-W-SD	18W	Ø145*40mm	Ø125mm	SMD 2835	1800lm	AC100-240V	120°	2800-6500K	≥80
KH-PL-R052-24W-W-SD	24W	Ø175*40mm	Ø155mm	SMD 2835	2400lm	AC100-240V	120°	2800-6500K	≥80
KH-PL-R052-30W-W-SD	30W	Ø220*40mm	Ø200mm	SMD 2835	3000lm	AC100-240V	120°	2800-6500K	≥80
KH-PL-S052-7W-W-SD	7W	90*90*40mm	75*75mm	SMD 2835	700lm	AC100-240V	120°	2800-6500K	≥80
KH-PL-S052-12W-W-SD	12W	120*120*40mm	100*100mm	SMD 2835	1200lm	AC100-240V	120°	2800-6500K	≥80
KH-PL-S052-18W-W-SD	18W	145*145*40mm	125*125mm	SMD 2835	1800lm	AC100-240V	120°	2800-6500K	≥80
KH-PL-S052-24W-W-SD	24W	175*175*40mm	155*155mm	SMD 2835	2400lm	AC100-240V	120°	2800-6500K	≥80
KH-PL-S052-30W-W-SD	30W	220*220*40mm	200*200mm	SMD 2835	3000lm	AC100-240V	120°	2800-6500K	≥80

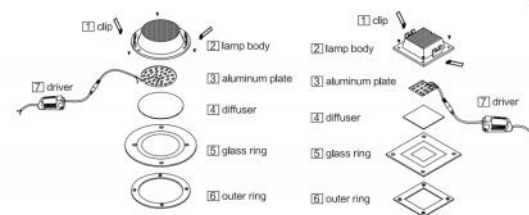


Model	Power	Size	Cut-out-Size	SMD Qty	Lumen	Voltage	CCT	CRI
KH-PL-S606-6W-W-SD	6W	100*100*38mm	75*75mm	12pcs-5730	420-480lm	AC100-265V	3000-6500K	Ra≥80
KH-PL-S606-9W-W-SD	9W	125*125*38mm	103*103mm	18pcs-5730	630-720lm	AC100-265V	3000-6500K	Ra≥80
KH-PL-S606-12W-W-SD	12W	170*170*38mm	125*125mm	24pcs-5730	840-960lm	AC100-265V	3000-6500K	Ra≥80
KH-PL-S606-18W-W-SD	18W	200*200*38mm	170*170mm	36pcs-5730	1260-1440lm	AC100-265V	3000-6500K	Ra≥80
KH-PL-S606-24W-W-SD	24W	260*260*38mm	225*225mm	48pcs-5730	1680-2160lm	AC100-265V	3000-6500K	Ra≥80
KH-PL-R606-6W-W-SD	6W	φ100*38mm	φ75mm	12pcs-5730	420-480lm	AC100-265V	3000-6500K	Ra≥80
KH-PL-R606-9W-W-SD	9W	φ125*38mm	φ103mm	18pcs-5730	630-720lm	AC100-265V	3000-6500K	Ra≥80
KH-PL-R606-12W-W-SD	12W	φ170*38mm	φ125mm	24pcs-5730	840-960lm	AC100-265V	3000-6500K	Ra≥80
KH-PL-R606-18W-W-SD	18W	φ200*38mm	φ170mm	36pcs-5730	1260-1440lm	AC100-265V	3000-6500K	Ra≥80
KH-PL-R606-24W-W-SD	24W	φ260*38mm	φ225mm	48pcs-5730	1680-2160lm	AC100-265V	3000-6500K	Ra≥80

Put in and out



Installation diagram



Model	Power	Size	Cut-out-Size	SMD Qty	Lumen	Voltage	CCT	CRI
KH-PL-R045-8W-W-SD	8W	φ120*35mm	φ105mm	40pcs 2835	560-640lm	AC100-265V	3000-6500K	Ra>80
KH-PL-R045-12W-W-SD	12W	φ170*35mm	φ155mm	60pcs 2835	840-960lm	AC100-265V	3000-6500K	Ra>80
KH-PL-R045-18W-W-SD	18W	φ225*35mm	φ210mm	90pcs 2835	1260-1440lm	AC100-265V	3000-6500K	Ra>80
KH-PL-R045-24W-W-SD	24W	φ300*35mm	φ285mm	120pcs 2835	1680-1920lm	AC100-265V	3000-6500K	Ra>80


CE RoHS

PANEL LIGHT

Put in and out




Installation diagram




Model	Power	Size	Cut-out-Size	SMD Qty	Lumen	Voltage	CCT	CRI
KH-PL-S045-8W-W-SD	8W	120*120*35mm	105*105mm	40pcs 2835	560-640lm	AC100-265V	3000-6500K	Ra>80
KH-PL-S045-12W-W-SD	12W	170*170*35mm	155*155mm	60pcs 2835	840-960lm	AC100-265V	3000-6500K	Ra>80
KH-PL-S045-18W-W-SD	18W	225*225*35mm	210*210mm	90pcs 2835	1260-1440lm	AC100-265V	3000-6500K	Ra>80
KH-PL-S045-24W-W-SD	24W	300*300*35mm	285*285mm	120pcs 2835	1680-1920lm	AC100-265V	3000-6500K	Ra>80

CE RoHS

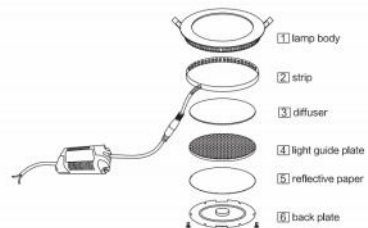

Model NO.	Power	Size	Cut-out-Size	SMD Qty	Luminous flux	Input voltage	CCT	CRI
KH-PL-R005-3W-W-SD	3W	Φ 85*13mm	Φ 75mm	15pcs-2835	210-240lm	AC100-265V	3000-6500K	Ra>80
KH-PL-R005-4W-W-SD	4W	Φ 105*13mm	Φ 95mm	20pcs-2835	280-320lm	AC100-265V	3000-6500K	Ra>80
KH-PL-R005-6W-W-SD	6W	Φ 120*13mm	Φ 110mm	30pcs-2835	420-480lm	AC100-265V	3000-6500K	Ra>80
KH-PL-R005-9W-W-SD	9W	Φ 145*13mm	Φ 135mm	45pcs-2835	630-720lm	AC100-265V	3000-6500K	Ra>80
KH-PL-R005-12W-W-SD	12W	Φ 170*13mm	Φ 155mm	60pcs-2835	840-960lm	AC100-265V	3000-6500K	Ra>80
KH-PL-R005-15W-W-SD	15W	Φ 200*13mm	Φ 185mm	75pcs-2835	1050-1200lm	AC100-265V	3000-6500K	Ra>80
KH-PL-R005-18W-W-SD	18W	Φ 225*13mm	Φ 210mm	90pcs-2835	1260-1440lm	AC100-265V	3000-6500K	Ra>80
KH-PL-R005-20W-W-SD	20W	Φ 240*13mm	Φ 225mm	100pcs-2835	1400-1600lm	AC100-265V	3000-6500K	Ra>80
KH-PL-R005-24W-W-SD	24W	Φ 300*13mm	Φ 280mm	120pcs-2835	1680-1920lm	AC100-265V	3000-6500K	Ra>80
KH-PL-R005-32W-W-SD	32W	Φ 400*13mm	Φ 390mm	160pcs-2835	2240-2560lm	AC100-265V	3000-6500K	Ra>80
KH-PL-R005-48W-W-SD	48W	Φ 600*13mm	Φ 580mm	240pcs-2835	3360-3840lm	AC100-265V	3000-6500K	Ra>80

PANEL LIGHT



Model NO.	Power	Size	Cut-out-Size	SMD Qty	Luminous flux	Input voltage	CCT	CRI
KH-PL-S005-3W-W-SD	3W	85*85*13mm	75*75mm	15pcs-2835	210-240lm	AC100-265V	3000-6500K	Ra>80
KH-PL-S005-4W-W-SD	4W	105*105*13mm	95*95mm	20pcs-2835	280-320lm	AC100-265V	3000-6500K	Ra>80
KH-PL-S005-6W-W-SD	6W	120*120*13mm	110*110mm	30pcs-2835	420-480lm	AC100-265V	3000-6500K	Ra>80
KH-PL-S005-9W-W-SD	9W	145*145*13mm	135*135mm	45pcs-2835	630-720lm	AC100-265V	3000-6500K	Ra>80
KH-PL-S005-12W-W-SD	12W	170*170*13mm	155*155mm	60pcs-2835	840-960lm	AC100-265V	3000-6500K	Ra>80
KH-PL-S005-15W-W-SD	15W	200*200*13mm	185*185mm	75pcs-2835	1050-1200lm	AC100-265V	3000-6500K	Ra>80
KH-PL-S005-18W-W-SD	18W	225*225*13mm	210*210mm	90pcs-2835	1260-1440lm	AC100-265V	3000-6500K	Ra>80
KH-PL-S005-20W-W-SD	20W	240*240*13mm	225*225mm	100pcs-2835	1400-1600lm	AC100-265V	3000-6500K	Ra>80
KH-PL-S005-24W-W-SD	24W	300*300*13mm	280*280mm	120pcs-2835	1680-1920lm	AC100-265V	3000-6500K	Ra>80
KH-PL-S005-32W-W-SD	32W	400*400*13mm	390*390mm	160pcs-2835	2240-2560lm	AC100-265V	3000-6500K	Ra>80
KH-PL-S005-48W-W-SD	48W	600*600*13mm	580*580mm	240pcs-2835	3360-3840lm	AC100-265V	3000-6500K	Ra>80

- surface pane light
- CB,SAA,DLC,CE certified

screwless

ultra slim

surface mounting



Lamp body color available



PANEL LIGHT



Screwless



Model	Power	Size	SMD Qty	Lumen	Voltage	CCT	CRI
KH-PL-R025-9W-W-SD	9W	Φ 120*24mm	45pcs-2835	630~720lm	AC100-265V	3000~6500K	Ra≥80
KH-PL-R025-15W-W-SD	15W	Φ 175*24mm	75pcs-2835	1050~1200lm	AC100-265V	3000~6500K	Ra≥80
KH-PL-R025-22W-W-SD	22W	Φ 225*24mm	110pcs-2835	1540~1760lm	AC100-265V	3000~6500K	Ra≥80
KH-PL-R025-26W-W-SD	26W	Φ 300*24mm	130pcs-2835	1820~2080lm	AC100-265V	3000~6500K	Ra≥80


Lamp body color available



Comparison



Installation diagram




Screwless

PANEL LIGHT



Lamp body color available


Golden	Red bronze
Silver	Chrome
Black	Yellow bronze
White	Cyan bronze
Nickel	Golden bronze

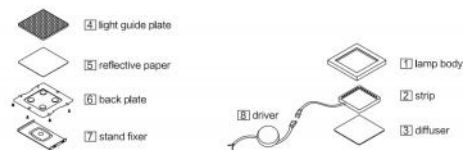


Model	Power	Size	SMD Qty	Lumen	Voltage	CCT	CRI
KH-PL-S025-9W-W-SD	9W	120*120*24mm	45pcs-2835	630-720lm	AC100-265V	3000-6500K	Ra≥80
KH-PL-S025-15W-W-SD	15W	175*175*24mm	75pcs-2835	1050-1200lm	AC100-265V	3000-6500K	Ra≥80
KH-PL-S025-22W-W-SD	22W	225*225*24mm	110pcs-2835	1540-1760lm	AC100-265V	3000-6500K	Ra≥80
KH-PL-S025-26W-W-SD	26W	300*300*24mm	130pcs-2835	1820-2080lm	AC100-265V	3000-6500K	Ra≥80



Comparison

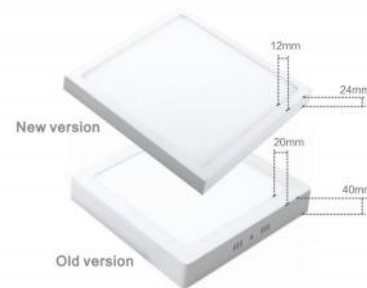

Installation diagram

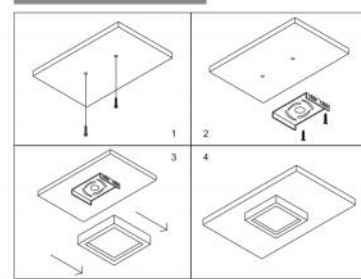



073

Surface Mounted Panel Light




Model	Power	Size	SMD Qty	Lumen	Voltage	CCT	CRI
KH-PL-R034-16W-W-SD	16W	Ø120*36mm	90pcs 2835	1440lm	AC100-265V	3000-6500K	Ra>80
KH-PL-R034-24W-W-SD	24W	Ø175*36mm	168pcs 2835	2160lm	AC100-265V	3000-6500K	Ra>80
KH-PL-R034-30W-W-SD	30W	Ø225*36mm	240pcs 2835	2700lm	AC100-265V	3000-6500K	Ra>80
KH-PL-R034-48W-W-SD	48W	Ø300*36mm	480pcs 2835	4320lm	AC100-265V	3000-6500K	Ra>80




Model	Power	Size	SMD Qty	Lumen	Voltage	CCT	CRI
KH-PL-S034-16W-W-SD	16W	120*120*36mm	90pcs 2835	1440lm	AC100-265V	3000-6500K	Ra>80
KH-PL-S034-24W-W-SD	24W	175*175*36mm	168pcs 2835	2160lm	AC100-265V	3000-6500K	Ra>80
KH-PL-S034-30W-W-SD	30W	225*225*36mm	240pcs 2835	2700lm	AC100-265V	3000-6500K	Ra>80
KH-PL-S034-48W-W-SD	48W	300*300*36mm	480pcs 2835	4320lm	AC100-265V	3000-6500K	Ra>80

074



Model NO	Power	Size	Cut-out-Size	SMD Qty	Luminous flux	Input voltage	CCT	CRi
KH-PL-R026-7W-W-SD	7W	Φ90*28mm	Φ80mm	35pcs-2835	490-560lm	AC100-265V	3000-6500K	Ra>80
KH-PL-R026-16W-W-SD	16W	Φ120*28mm	Φ110mm	80pcs-2835	1120-1280lm	AC100-265V	3000-6500K	Ra>80
KH-PL-R026-24W-W-SD	24W	Φ170*28mm	Φ160mm	120pcs-2835	1680-1920lm	AC100-265V	3000-6500K	Ra>80
KH-PL-R026-32W-W-SD	32W	Φ225*28mm	Φ210mm	160pcs-2835	2240-2560lm	AC100-265V	3000-6500K	Ra>80




Model NO	Power	Size	Cut-out-Size	SMD Qty	Luminous flux	Input voltage	CCT	CRi
KH-PL-S026-7W-W-SD	7W	90*90*28mm	80*80mm	35pcs-2835	490-560lm	AC100-265V	3000-6500K	Ra>80
KH-PL-S026-16W-W-SD	16W	120*120*28mm	110*110mm	80pcs-2835	1120-1280lm	AC100-265V	3000-6500K	Ra>80
KH-PL-S026-24W-W-SD	24W	170*170*28mm	160*160mm	120pcs-2835	1680-1920lm	AC100-265V	3000-6500K	Ra>80
KH-PL-S026-32W-W-SD	32W	225*225*28mm	210*210mm	160pcs-2835	2240-2560lm	AC100-265V	3000-6500K	Ra>80




Model	Power	Size	SMD Qty	Lumen	Voltage	CCT	CRI
KH-PL-R047-3W-W-SD	3W	Φ 85*40mm	15pcs-2835	210~240lm	AC100~265V	3000~6500K	Ra≥80
KH-PL-R047-6W-W-SD	6W	Φ 120*40mm	30pcs-2835	420~480lm	AC100~265V	3000~6500K	Ra≥80
KH-PL-R047-9W-W-SD	9W	Φ 145*40mm	45pcs-2835	630~720lm	AC100~265V	3000~6500K	Ra≥80
KH-PL-R047-12W-W-SD	12W	Φ 170*40mm	60pcs-2835	840~960lm	AC100~265V	3000~6500K	Ra≥80
KH-PL-R047-15W-W-SD	15W	Φ 200*40mm	75pcs-2835	1050~1200lm	AC100~265V	3000~6500K	Ra≥80
KH-PL-R047-18W-W-SD	18W	Φ 225*40mm	90pcs-2835	1260~1440lm	AC100~265V	3000~6500K	Ra≥80
KH-PL-R047-24W-W-SD	24W	Φ 300*40mm	120pcs-2835	1680~2160lm	AC100~265V	3000~6500K	Ra≥80
KH-PL-R047-32W-W-SD	32W	Φ 400*40mm	160pcs-2835	2240~2560lm	AC100~265V	3000~6500K	Ra≥80
KH-PL-R047-36W-W-SD	36W	Φ 500*40mm	180pcs-2835	2520~2080lm	AC100~265V	3000~6500K	Ra≥80
KH-PL-R047-48W-W-SD	48W	Φ 600*40mm	240pcs-2835	3360~3840lm	AC100~265V	3000~6500K	Ra≥80



Model	Power	Size	SMD Qty	Lumen	Voltage	CCT	CRI
KH-PL-S047-3W-W-SD	3W	85*85*40mm	15pcs-2835	210~240lm	AC100~265V	3000~6500K	Ra≥80
KH-PL-S047-6W-W-SD	6W	120*120*40mm	30pcs-2835	420~480lm	AC100~265V	3000~6500K	Ra≥80
KH-PL-S047-9W-W-SD	9W	145*145*40mm	45pcs-2835	630~720lm	AC100~265V	3000~6500K	Ra≥80
KH-PL-S047-12W-W-SD	12W	170*170*40mm	60pcs-2835	840~960lm	AC100~265V	3000~6500K	Ra≥80
KH-PL-S047-15W-W-SD	15W	200*200*40mm	75pcs-2835	1050~1200lm	AC100~265V	3000~6500K	Ra≥80
KH-PL-S047-18W-W-SD	18W	225*225*40mm	90pcs-2835	1260~1440lm	AC100~265V	3000~6500K	Ra≥80
KH-PL-S047-24W-W-SD	24W	300*300*40mm	120pcs-2835	1680~2160lm	AC100~265V	3000~6500K	Ra≥80
KH-PL-S047-32W-W-SD	32W	400*400*40mm	160pcs-2835	2240~2560lm	AC100~265V	3000~6500K	Ra≥80
KH-PL-S047-36W-W-SD	36W	500*500*40mm	180pcs-2835	2520~2080lm	AC100~265V	3000~6500K	Ra≥80
KH-PL-S047-48W-W-SD	48W	600*600*40mm	240pcs-2835	3360~3840lm	AC100~265V	3000~6500K	Ra≥80



Model	Power	Size	SMD Qty	Lumen	Voltage	CCT	CRI
KH-PL-R014-6W-W-SD	6W	φ 90*55mm	30pcs-2835	420-480lm	AC100-265V	3000-6500K	Ra≥80
KH-PL-R014-12W-W-SD	12W	φ 120*55mm	60pcs-2835	840-960lm	AC100-265V	3000-6500K	Ra≥80
KH-PL-R014-18W-W-SD	18W	φ 180*55mm	90pcs-2835	1260-1440lm	AC100-265V	3000-6500K	Ra≥80
KH-PL-R014-24W-W-SD	24W	φ 220*55mm	120pcs-2835	1680-1920lm	AC100-265V	3000-6500K	Ra≥80
KH-PL-R014-36W-W-SD	36W	φ 300*55mm	180pcs-2835	2520-2880lm	AC100-265V	3000-6500K	Ra≥80




Model	Power	Size	SMD Qty	Lumen	Voltage	CCT	CRI
KH-PL-S014-6W-W-SD	6W	90*90*55mm	30pcs-2835	420-480lm	AC100-265V	3000-6500K	Ra≥80
KH-PL-S014-12W-W-SD	12W	120*120*55mm	60pcs-2835	840-960lm	AC100-265V	3000-6500K	Ra≥80
KH-PL-S014-18W-W-SD	18W	180*180*55mm	90pcs-2835	1260-1440lm	AC100-265V	3000-6500K	Ra≥80
KH-PL-S014-24W-W-SD	24W	220*220*55mm	120pcs-2835	1680-1920lm	AC100-265V	3000-6500K	Ra≥80
KH-PL-S014-36W-W-SD	36W	300*300*55mm	180pcs-2835	2520-2880lm	AC100-265V	3000-6500K	Ra≥80






COLOR
TEMPERATURE



Product Advantages



RoHS CE LED

Model	Power	Size	Cut out Size	Chip size	Lumen	Voltage	Beam Angle	CCT	CRI
KH-PL-S056-12W-S-SD	12W	300*300*30mm	295*295mm	SMD 2835	1200lm	AC100-240V	120°	2800-6500K	≥ 80
KH-PL-L056-24W-S-SD	24W	300*600*30mm	295*595mm	SMD 2835	2400lm	AC100-240V	120°	2800-6500K	≥ 80
KH-PL-S056-36W-S-SD	36W	600*600*30mm	595*595mm	SMD 2835	3600lm	AC100-240V	120°	2800-6500K	≥ 80
KH-PL-S056-48W-S-SD	48W	600*600*30mm	595*595mm	SMD 2835	4800lm	AC100-240V	120°	2800-6500K	≥ 80
KH-PL-L056-48W-S-SD	48W	1200*300*30mm	1195*295mm	SMD 2835	4800lm	AC100-240V	120°	2800-6500K	≥ 80